

4

STOVES REFRIGERATORS / TOILETS PLUMBING / FITTINGS PUMPS



M T M

Polished Stainless Steel Round Basin

Round Polished Stainless Steel basin. To be completed with ø 50 mm drain fitting.

Cod.	Cutout mm	Flange mm	H mm	UM	€
1501229	260	290	120	PCS	
1501233	300	330	150	PCS	
1501239	360	390	150	PCS	

**Polished Stainless Steel Cylindrical Basin**

Cylindrical Polished Stainless Steel basin. To be completed with ø 50 mm drain fitting.

Cod.	Cutout mm	Flange mm	H mm	UM	€
1501429	260	285	180	PCS	
1501433	300	330	180	PCS	
1501438	360	385	180	PCS	
1501446	420	455	180	PCS	

**Polished Stainless Steel Oval Basin**

Oval Polished Stainless Steel basin. To be completed with ø 50 mm drain fitting.

Cod.	Cutout mm	Flange mm	H mm	UM	€
1501338	360 x 240	385 x 265	130	PCS	

**Stainless Steel 150 Rectangular Basin**

Rectangular Polished Stainless Steel basin. To be completed with ø 50 mm drain fitting.

Cod.	Cutout mm	Flange mm	H mm	UM	€
1501117	300 x 150	320 x 170	150	PCS	
1501126	300 x 240	320 x 260	150	PCS	
1501132	330 x 300	350 x 320	150	PCS	
1501136	340 x 340	360 x 360	150	PCS	

**Stainless Steel 180/200 Rectangular Basin**

Rectangular Polished Stainless Steel basin. To be completed with ø 50 mm drain fitting.

Cod.	Cutout mm	Flange mm	H mm	UM	€
1501125	330 x 235	350 x 250	180	PCS	
1501133	330 x 330	350 x 350	200	PCS	
1501140	400 x 400	420 x 420	200	PCS	



Polished Stainless Steel Basin and Cover

18/8 Stainless Steel square basin with tempered glass cover. Complete with swiveling spout, to be completed with ø 50 mm drain fitting.



Cod.	Dim mm	H mm	UM	€
1501834	320 x 350	180	PCS	


MTM
QUALITY
Polished Stainless Steel Round Basin with Cover

Round basin with tempered glass cover and 18/8 Stainless Steel basin. Complete with swiveling spout, to be completed with ø 50 mm drain fitting.



Cod.	Dim mm	H mm	UM	€
1501830	ø 300	180	PCS	


MTM
QUALITY
Small Sink Drains

Sink drains for 40 mm hole basins.



Cod.	Drain Outlet	Outlet ø mm	UM	€
1505005	Straight	20	PCS	
1505006	Side	20	PCS	
1505015	Straight	25	PCS	
1505016	Side	25	PCS	

**Large Straight Sink Drain**

Large straight sink drain for 50 mm hole sinks with cap and long threaded exhaust outlet.



Cod.	Outlet ø mm	UM	€
1505004	45 (1" 1/2)	PCS	

**Big Straight Sink Drain**

Big straight sink drain for 50 mm hole sinks with cap and threaded exhaust outlet.



Cod.	Outlet ø mm	UM	€
1505008	38 (1" 1/4)	PCS	
1505009	45 (1" 1/2)	PCS	

**Large Sink Drain with Extensible Hose**

Large sink drain for 50 mm hole sinks with cap and extendable exhaust hose.



Cod.	Outlet ø mm	UM	€
1505007	25	PCS	

**Extensible Exhaust Hose**

Extensible drain hose with threaded ring nut and 32/40 mm adjustable outlet.



Cod.	Ref	UM	€
1412030	1" 1/4	PCS	
1412031	1" 1/2	PCS	


Drain Fittings

Drain fittings with 1" 1/4 threaded ring nut and 25 mm hose connector.



Cod.	Ref	UM	€
1440200	Straight	PCS	
1440202	Elbow	PCS	





Set-in Stove with Basin

Satinized Stainless Steel compact basin-stove with glass cover, safety thermocouples and drain fittings.



Cod.	Dim mm	UM	€
1501950	600 x 445 x H139	PCS	



DOMETIC

2 Burner Stove with Basin

2 burner Tempered Glass top and 18/8 Stainless Steel basin. Complete with safety thermocouples.



Cod.	Dim mm	Accessories	UM	€
1506622	600 x 420 x H180		PCS	
1506682		2 Burner Panholder	PCK	




MTM
QUALITY

2 Burner Stove with Basin and Glass Top

2 burner tempered black Glass top and Stainless Steel basin, divided in cooking area and sink. Complete with thermocouples and piezo electric ignition. Complete with sink drain and spout tap.



Cod.	Dim mm	Sink	Accessories	UM	€
1506651	716 x 340 x H150	R		PCS	
1506650	716 x 340 x H150	L		PCS	
1506682			2 Burner Panholder	PCK	

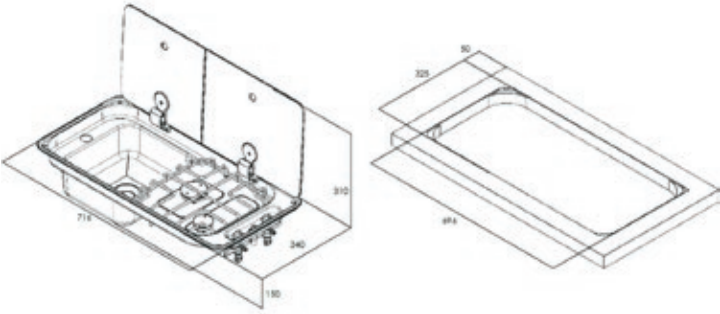


MTM
QUALITY

1 Burner Stove with Basin and Glass Top

1 burner tempered black Glass top and Stainless Steel basin. Complete with thermocouples and piezo electric ignition. Complete with sink drain and spout tap.



Cod.	Dim mm	Sink	Accessories	UM	€
1506655	530 x 340 x H150	R		PCS	
1506656	530 x 340 x H150	L		PCS	
1506681			1 Burner Panholder	PCK	

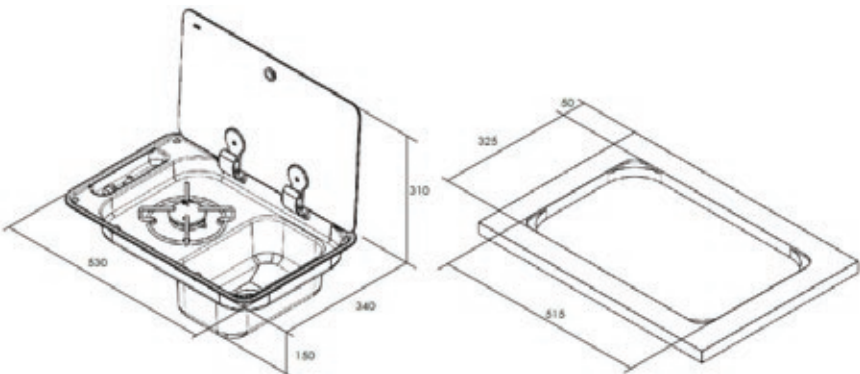

MTM
QUALITY

**Burny1 1-Burner Built-In Gas Hob**

1-Burner Polished Stainless Steel built-in gas hob with safety thermocouples.
Recess height 80 mm.



Cod.	mm	Accessories	UM	€
1504540	320 x 285		PCS	
1506681		1-Burner Panholder	PCK	

**Burny2 2-Burner Built-In Gas Hob**

2-Burner Polished Stainless Steel built-in gas hob with safety thermocouples.
Recess height 80 mm.



Cod.	mm	Accessories	UM	€
1504550	380 x 360		PCS	
1506682		2-Burner Panholder	PCK	

**Burny3 3-Burner Built-In Gas Hob**

3-Burner Polished Stainless Steel built-in gas hob with safety thermocouples.
Recess dimensions: 430 x 320 x H80 mm.



Cod.	mm	Accessories	UM	€
1504553	470 x 360		PCS	
1506682		2-Burner Panholder	PCK	

**Chrystal 1 1-Burner Built-In Gas Hob**

1-Burner tempered glass top built-in gas hob with safety thermocouples.




Cod.	mm	Accessories	UM	€
1506601	365 x 200		PCS	
1506681		1-Burner Panholder	PCK	

**Chrystal 2 2-Burner Built-In Gas Hob**

2-Burner tempered glass top built-in gas hob with safety thermocouples.



Cod.	mm	Accessories	UM	€
1506602	380 x 280		PCS	
1506682		2-Burner Panholder	PCK	

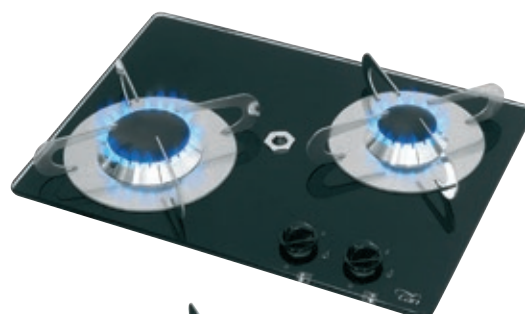**Chrystal 3 3-Burner Built-In Gas Hob**

3-Burner Tempered Glass top built-in gas hob with safety thermocouples.



Cod.	mm	Accessories	UM	€
1506603	420 x 370		PCS	
1506682		2-Burner Panholder	PCK	



Techimpex Built-In Gas Hobs

Lightweight and compact Techimpex built-in Stainless Steel gas hobs complete with thermo-couples and grate with pressure lock. Burners power:

Ischia 2300W


Lipari 1700+3000W

Burano 1000+1700+3000W

Cod.	Ref	Dim mm	Accessories	UM	€
1504661	Ischia 1-Burner	250 x 270		PCS	
1504662	Lipari 2-Burner	470 x 340		PCS	
1504663	Burano 3-Burner	470 x 390		PCS	
1504204			1-Burner Panholder	PCS	
1504205			2-Burner Panholder	PCS	
1504206			3-Burner Panholder	PCS	



TECHIMPEX

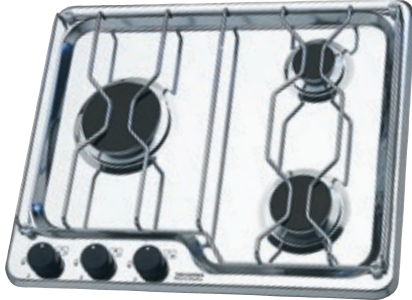

Dometic Built-In Gas Hobs with Cover

Satinized Stainless Steel built-in gas hobs with safety thermocouples and Tempered Glass cover.

Cod.	Cooker	Dim mm	UM	€
1504648	2-Burner	480 x 370	PCS	
1504656	3-Burner	560 x 440	PCS	



DOMETIC



Hoodiny Built-In Gas Hobs with Cover

Stainless Steel built-in gas hobs with safety thermocouples and Tempered Glass cover.

Cod.	Cooker	Dim mm	Accessories	UM	€
1504651	Round 1-Burner	ø 340		PCS	
1504652	Square 2-Burner	530 x 325		PCS	
1506681			1-Burner Panholder	PCK	
1506682			2-Burner Panholder	PCK	



MTM
QUALITY



Dometic Induction Hobs

Latest generation Dometic 220V built-in vitreous ceramic induction hobs with touch control and 9-stage heat adjustment. Equipped with a tempered glass lid which, once closed, acts as an additional work surface. Designed not to overload the power supply or electrical system.

Plates power:

1-Burner 2300W, 10A

2-Burner 1000/1300W, 10A

Cod.	Ref	Dim mm	Weight Kg	UM	€
1505810	1-Burner	350 x 350 x H55	5	PCS	
1505820	2-Burner	525 x 350 x H55	7	PCS	



New



DOMETIC

Techimpex Flat Line Induction Hobs

Built-in Techimpex 220V hobs with vitreous ceramic induction plates and touch control sensors. Complete with power "on" indicator, residual heat indicator, anti-overflow sensor and cooking timer. Optional panholders complete with heat guards.

Plates power: Giglio 1400+2300W Grado 1400+1400+2300+2300W

Cod.	Ref	Dim mm	Weight Kg	Accessories	UM	€
1505862	Giglio 2-Burner	500 x 300	5		PCS	
1505868	Grado 4-Burner	580 x 510	6		PCS	
1504207				2-Burner Panholder	PCS	
1504208				4-Burner Panholder	PCS	



TECHIMPEX

**Can Glass Ceramic Hobs**

Built-in 220V hobs with vitreous ceramic radiant plates and touch control sensors.

Plates power: 2-Burner 1200+1700W 4-Burner 1200+1200+1800+1800W

Cod.	Ref	Dim mm	Weight Kg	UM	€
1505852	2-Burner	500 x 300 x H41	7	PCS	
1505855	4-Burner	580 x 510 x H41	8,5	PCS	



MTM
QUALITY

**Techimpex Glass Ceramic Hobs**

Built-in Techimpex 220V hobs with vitreous ceramic radiant plates, touch control sensors and Stainless Steel case. Complete with power "on" indicator and residual heat indicator.



Optional panholders complete with heat guards.

Plates power: Linosa 1200+1700W Torres 1200+1200+1700+1700W

Cod.	Ref	Dim mm	Weight Kg	Accessories	UM	€
1505860	Linosa 2-Burner	500 x 300	5		PCS	
1505864	Torres 4-Burner	500 x 510	6		PCS	
1504207				2-Burner Panholder	PCS	
1504208				4-Burner Panholder	PCS	



TECHIMPEX

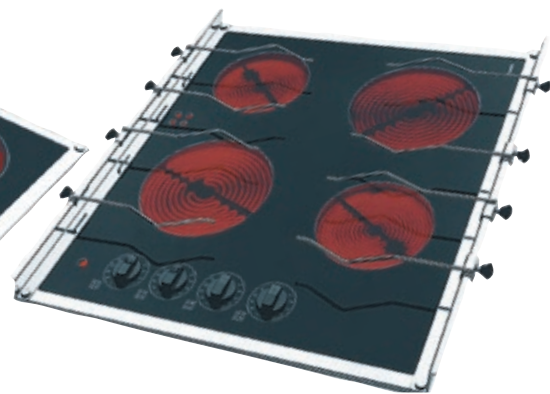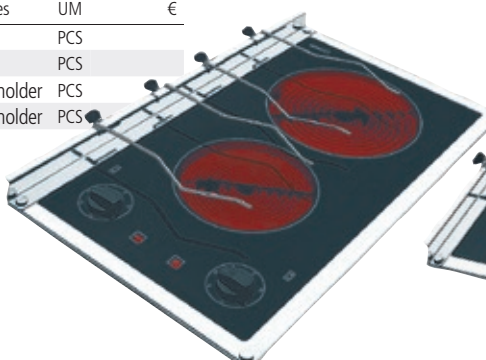

Techimpex Marine Gas Cookers

Stainless Steel framework Techimpex Gas cookers with enamelled oven. Complete with thermocouples, solid brass burner caps, one panholder, gimbals, oven grid, double glass and safety door lock. Optional heat guard.

Portofino CL: compact 2-burner cooker with rear oven burner. Single burner power 2000W, oven power 1550W.

Tropea XL: 2-burner cooker with large oven and ultra-performing central oven burner. Single burner power 2000W, oven power 1700W.

Maratea XL: 3-burner cooker with large oven and ultra-performing central oven burner. Burners power 1000+2000+2000W, oven power 1700W.

H = Height

W = Width

L = Length

Cod.	Cooker	Dim mm	Weight Kg	Accessories	UM	€
1504065	Portofino CL 2-Burner	W450 x L480 x H460	21		PCS	
1504066	Tropea XL 2-Burner	W500 x L440 x H440	23		PCS	
1504067	Maratea XL 3-Burner	W500 x L480 x H460	24		PCS	
1504211				CL Heat Guard	PCS	
1504212				XL2/XL3 Heat Guard	PCS	



TECHIMPEX

**Dometic Gas Cookers with Oven**

Gas cookers with 28 Lt oven and 2 burners. Complete with panholders, safety door lock and safe ignition system. Very easy flame and temperature control.

SunLight: compact cooker with 1100W oven power and 1800/2200W burners power.

StarLight: cooker with additional grill compartment, mirror tempered glass top, piezoelectric ignition and inner light. 1100W oven power, 1300W grill power and 1800/2200W burners power.

H = Height

W = Width

L = Length

Cod.	Cooker	Dim mm	Weight Kg	UM	€
1504061	SunLight 2-Burner	W449 x L398 x H357	15	PCS	
1504062	StarLight 2-Burner	W450 x L358 x H508	19	PCS	



DOMETIC

**Can Gas Cookers with Oven**

Stainless Steel framework Gas cookers with tempered glass hob unit on top and 30 Lt oven. With piezo ignition and safety valves on all burners. Leveled grid allows pots easy sliding. Oven with ergonomic handle, vented door and double glass with integrated thermometer, oven grid, heat sink and Aluminum burner covers. Single burner power 1900W, oven power 2000W.

H = Height

W = Width

L = Length

Cod.	Cooker	Dim mm	Weight Kg	Accessories	UM	€
1504072	2-Burner	W500 x L410 x H390	20		PCS	
1504073	3-Burner	W500 x L410 x H390	20		PCS	
1506672				2-Burner Panholder	PCK	
1506673				3-Burner Panholder	PCK	

MTM
QUALITY

Techimpex Tabletop Cookers

Stainless Steel lightweight and compact Techimpex tabletop cookers. With thermocouples and grate with pressure lock. Capri 1-burner cooker, burner power 1600W. Ponza 2-burner cooker, burners power 2000W.



Cod.	Ref	Dim mm	Accessories	UM	€
1504039	Capri 1-Burner	240 x 300 x H130		PCS	
1504051	Ponza 2-Burner	456 x 300 x H130		PCS	
1504203			1-Burner Panholder	PCS	
1504201			2-Burner Panholder	PCS	
1504202			2-Burner Gimbal	PCS	



TECHIMPEX

Hotty Cookers

Stainless Steel cookers with safety thermocouples.



Cod.	Ref	Dim mm	Accessories	UM	€
1504040	1-Burner	210 x 290 x H50		PCS	
1504050	2-Burner	440 x 290 x H50		PCS	
1506681			1-Burner Panholder	PCK	
1506682			2-Burner Panholder	PCK	

MTM
QUALITY**Outdoor Portable Cooker**

Brunner portable gas cooker with interchangeable Camping Gaz type gas cartridges. Stainless Steel gas compartment and adjustable double flame Aluminum burner. Complete with piezoelectric ignition system, safety thermocouples and handy carrying bag.



Cod.	Dim mm	Weight Kg	UM	€
1504020	372 x 286 x H125	2	PCS	



BRUNNER

PB1327 Built-In Electric BBQ Hob

Built-In Stainless Steel barbeque hob. Power supply 2400 Watt - 220V.



Cod.	Dim mm	UM	€
1505840	500 x 300	PCS	

MTM
QUALITY**Procida Built-In Electric Hob BBQ**

Built-in Techimpex Stainless Steel hob to be used as an electric grill and stove for grilling meat, fish and vegetables. With 500 Watt - 220V power vitreous ceramic top.



Cod.	Dim mm	UM	€
1505866	510 x 288	PCS	



TECHIMPEX

Feuerdesign Mayon Barbeque

Versatile portable Stainless Steel grill, safe and easy to use. Charcoal feed with alcohol gel ignition. It cooks quickly and perfectly all types of grill food thanks to the adjustable fan with a rechargeable battery providing 4 hours autonomy. The optional glass dome allows to adjust the cooking thanks to the integrated thermometer. Complete with battery, power cable and kitchen tongs.

Cod.	Dim mm	UM	€
1504012	ø 330 x H185	PCS	



Feuerdesign
TISCHGRILL by LIMATEC



Feuerdesign Teide Barbeque

Versatile portable Stainless Steel grill, safe and easy to use. Charcoal feed with alcohol gel ignition. It cooks quickly and perfectly all types of grill food thanks to the adjustable fan with a rechargeable battery providing 4 hours autonomy. The optional glass dome allows to adjust the cooking thanks to the integrated thermometer. Complete with battery, power cable and kitchen tongs.

Cod.	Dim mm	UM	€
1504010	340 x 340 x H210	PCS	



Feuerdesign
TISCHGRILL by LIMATEC



Feuerdesign Santorin Barbeque

Versatile portable Stainless Steel grill, safe and easy to use. Charcoal feed with alcohol gel ignition. It cooks quickly and perfectly all types of grill food thanks to the adjustable fan with a rechargeable battery providing 4 hours autonomy. The optional glass dome allows to adjust the cooking thanks to the integrated thermometer. Complete with battery, power cable and kitchen tongs.

Cod.	Colour	Dim mm	UM	€
1504013	RED	680 x 340 x H210	PCS	
1504014	YELLOW	680 x 340 x H210	PCS	



Feuerdesign
TISCHGRILL by LIMATEC



Barbeque Feuerdesign Accessories and Spare Parts

Feuerdesign portable barbecues accessories and spare parts:
Glass and Stainless Steel dome lid with thermometer
Replacement fan complete with battery and cable
500 ml of alcohol gel for about 30 ignitions
2 Kg bag of charcoal

Cod.	Ref	UM	€
1504018	Dome Lid	PCS	
1504019	Replacement Fan	PCS	
1504015	500 ml Alcohol Gel	PCS	
1504016	2 Kg Charcoal	PCS	



Feuerdesign
TISCHGRILL by LIMATEC

Igloo Marine Ice Box Coolers

Igloo portable ice box coolers designed for nautical use, ideal for storing food, fish or as live bait tanks. THERMECOOL foam insulation with UV resistant ABS case and odorless polymer interior. The 150Q model is equipped with a double access door.



Cod.	Lt	Dim mm	Weight Kg	UM	€
1540024	23 (25Q)	510 x 290 x H330	2,7	PCS	
1540045	47 (50Q)	650 x 370 x H370	4,8	PCS	
1540122	113 (120Q)	980 x 450 x H450	9,2	PCS	
1540154	142 (150Q)	1050 x 480 x H510	11,2	PCS	

**Igloo Marine Ultra Ice Box Coolers**

Igloo portable ice box coolers designed for nautical use, ideal for storing food, fish or as live bait tanks. THERMECOOL foam insulation with UV resistant ABS case and odorless polymer interior.



Cod.	Lt	Dim mm	Weight Kg	UM	€
1540034	28 (30Q)	600 x 350 x H330	3,6	PZ	
1540051	51 (54Q)	650 x 390 x H390	5,2	PZ	
1540068	66 (70Q)	750 x 420 x H420	7,2	PZ	
1540089	94 (100Q)	900 x 450 x H420	8,6	PZ	

**Igloo Ice Coolers Spare Parts**

New and old series Igloo spare handles, latches and hinges.

Cod.	Ref	For Igloo Qt	UM	€
1540210	Handle without Screws	25<>72	PZ	
1540211	Handle 2 Screws	25<>72	PZ	

Cod.	Ref	For Igloo Qt	UM	€
1540212	Handle 4 Screws	90<>100	PZ	
1540213	PL White Latch	50<>165	PZ	
1540214	PL/S.Steel Black Latch	50<>165	PZ	
1540220	White Hinge	25<>165	PZ	
1540221	Black Hinge	25<>165	PZ	

**Portable Ice Box Coolers Mounting Kit**

Universal portable ice coolers mounting kit made of 4 corners + 2 elastic cords to be fastened through handles.



Cod.	UM	€
1540244	PCK	



Icey-Tek Portable Professional Ice Coolers

Professional use Australian portable Icey-Tek coolers, the best for fish and food. Thanks to the dense isolation mass they can maintain cold for many days and grant a perfect conservation of the fish. Endowed with two 1" threaded holes with caps to be used as fish live well. Very sturdy, with strong injection molten hinges and thermoplastic elastimer latches, can be used as a seating. Both the 160 litres and the 260 litres have a double open split lid.

Cod.	Lt	External Dim mm	Internal Dim mm	Weight Kg	UM	€
1540805	56	790 x 420 x H395	650 x 300 x H280	10	PCS	
1540807	70	855 x 430 x H445	695 x 310 x H320	12	PCS	
1540809	90	925 x 460 x H475	770 x 340 x H345	14	PCS	
1540811	115	1100 x 500 x H490	940 x 365 x H360	18	PCS	
1540816	160	1290 x 530 x H525	1125 x 390 x H380	27	PCS	
1540826	260	1550 x 580 x H560	1375 x 435 x H440	32	PCS	



Icey-Tek Portable Professional Ice Box Coolers Color

Professional use Australian portable Icey-Tek coolers, the best for fish and food. Thanks to the dense isolation mass they can maintain cold for many days and grant a perfect conservation of the fish. Endowed with two 1" threaded holes with caps to be used as fish live well. Very sturdy, with strong injection molten hinges and thermoplastic elastimer latches, can be used as a seating.

Cod.	Lt	External Dim mm	Internal Dim mm	Weight Kg	Colour	UM	€
1540845	56	790 x 420 x H395	650 x 300 x H280	10	BLUE	PCS	
1540847	70	855 x 430 x H445	695 x 310 x H320	12	BLUE	PCS	
1540849	90	925 x 460 x H475	770 x 340 x H345	14	BLUE	PCS	
1540835	56	790 x 420 x H395	650 x 300 x H280	10	RED	PCS	
1540837	70	855 x 430 x H445	695 x 310 x H320	12	RED	PCS	
1540839	90	925 x 460 x H475	770 x 340 x H345	14	RED	PCS	



Icey-Tek Ice Box Coolers Cushions

Waterproof foam composite cushions for Icey-Tek portable ice coolers. They are glued to the ice chest's seat thanks to the 3M adhesive side.



Cod.	For Icey-Tek Chest	Dimensions mm	UM	€
1540905	56 Lt	695 x 345	PCS	
1540907	70 Lt	745 x 350	PCS	
1540909	90 Lt	810 x 370	PCS	
1540911	115 Lt	990 x 400	PCS	

**Icey-Tek Spare Parts**

Icey-Tek ice cooler spare parts.



Cod.	Ref	UM	€
1540930	WHITE drain plugs (pair)	PR	
1540931	BLUE drain plugs (pair)	PR	
1540932	RED drain plugs (pair)	PR	
1540940	Hinge	PCS	
0343020	Latch	PCS	

**Icey-Tek Gel Ice Brick**

Icey-Tek synthetic ice bricks with special non-toxic gel and resistant food-grade Polyethylene container. Ideal for daily fish catch or food preservation.



Cod.	Dim mm	Weight Kg	UM	€
1540920	310 x 280 x 30	2	PCS	

**MTM Jazo Portable Ice Box Coolers**

Very light, high-performance portable ice box coolers, ideal for any recreational nautical activity. Built with innovative EPS material that guarantees exceptional resistance and insulation at a reduced cost. With the addition of ice it is able to maintain the temperature for 12 hours, losing only one degree. Complete with hook closure system and adjustable shoulder strap.

H = Height

W = Width

L = Length

Cod.	Lt	L mm	W mm	H mm	Weight Kg	UM	€
1540601	18	415	245	290	1,00	PCS	
1540602	24	415	245	290	1,40	PCS	
1540603	48	645	440	333	1,60	PCS	

**MTM Jazo Tasting Box Portable Ice Box Coolers**

Very light, high-performance portable ice box coolers designed to hold up to 5 bottles to be served at the ideal temperature. Built with innovative EPS material that guarantees exceptional resistance and insulation at a reduced cost. With the addition of blocks of ice included with the icebox, it is possible to maintain the temperature for 12 hours, losing only one degree. Complete with hook and loop closure system and adjustable shoulder strap.

H = Height

W = Width

L = Length

Cod.	L mm	W mm	H mm	Weight Kg	UM	€
1540605	320	245	335	1,20	PCS	



MTM

MTM

VF IM OCX2 S/Steel Ice Maker

Mechanical ice maker with Stainless Steel external casing and integrated refrigeration unit. With waterproof LED control panel that allows to set the freezer and check the water level in the refill versions. Thanks to the supplied fixing profile, the door can be installed totally or partially recessed. New opening with Steelock Vent Position handle that allows ventilation during periods of non-use. 220V/180W power supply, ice production 8 Kg/24h.

Available in two versions:

Hydro version which can be connected to the onboard potable water system.

Refill version with 7L internal water reservoir allowing mineral water to be used in order to make ice cubes.

H = Height

W = Width

L = Length



VITRIFRIGO

Cod.	Ref	Lt	Dim mm	Weight Kg	UM	€
1547075	Hydro	24	W370 x L435 x H641	23	PCS	
1547076	Hydro Compact	24	W370 x L555 x H486	25	PCS	
1547078	Refill	24	W370 x L435 x H641	23	PCS	
1547079	Refill Compact	24	W370 x L555 x H486	25	PCS	



VF DW35 S/Steel Drawer Freezer

Stainless Steel external casing drawer freezer. 12/24V external compressor, consumption 40W.

H = Height


W = Width

L = Length



VITRIFRIGO

Cod.	Ref	Lt	Dim mm	Weight Kg	UM	€
1548236	DW35	35	W450 x L552 x H285	24	PCS	

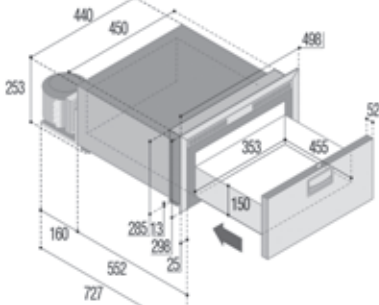

**Vfree Portable Refrigerator-Freezer 12/24V-230V**

Portable Refrigerator/Freezer with multi-voltage 12/24/230V Danfoss cooling unit. With digital control panel, LED display, USB charger socket, detachable lid, removable basket and internal LED light. Inner temperature can be adjusted between +10° and -20°C.



Cod.	Ref	Lt	Dim mm	Weight Kg	UM	€
1546036	VF35P	35	680 x 410 x H440	19	PCS	
1546045	VF45P	45	680 x 410 x H490	20	PCS	
1546055	VF55P	55	710 x 455 x H500	22	PCS	
1546066	VF65P	65	710 x 455 x H560	23	PCS	



VITRIFRIGO

C29 Portable Refrigerator-Freezer


Portable Refrigerator/Freezer with dual voltage 12/24V or multivoltage 12/24/220V Danfoss cooling unit. Inner temperature can be adjusted between +10° and -15°C by a mechanical knob thermostat or a digital display. Consumption 48W.



C29M: with mechanical thermostat and 12/24V dual voltage power supply

C29D: with digital thermostat and 12/24/220V multivoltage power supply

Cod.	Ref	Lt	Dim mm	Weight Kg	UM	€
1546027	C29M	29	530 x 345 x H390	15	PCS	
1546028	C29D	29	530 x 345 x H390	15	PCS	



VITRIFRIGO

C41 Portable Refrigerator-Freezer


Portable Refrigerator/Freezer with dual voltage 12/24V Danfoss cooling unit. Inner temperature can be adjusted between +10° and -10°C by a LED thermostat or a digital display. Consumption 43W.



C41L: with LED thermostat

C41D: with digital thermostat

Cod.	Ref	Lt	Dim mm	Weight Kg	UM	€
1546041	C41L	41	650 x 385 x H400	17	PCS	
1546040	C41D	41	650 x 385 x H400	17	PCS	



VITRIFRIGO

C65 Portable Refrigerator-Freezer


Portable Refrigerator/Freezer with dual voltage 12/24V Danfoss cooling unit. Inner temperature can be adjusted between +10° and -20°C by a LED thermostat or a digital display. Consumption 45W.



C65L: with LED thermostat

C65D: with digital thermostat

Cod.	Ref	Lt	Dim mm	Weight Kg	UM	€
1546065	C65L	65	765 x 510 x H458	24	PCS	
1546064	C65D	65	765 x 510 x H458	24	PCS	



VITRIFRIGO

**Vitrifrigo External Cooling Unit Refrigerators**

Vitrifrigo refrigerator with external 12/24V dual voltage Danfoss cooling unit that can be mounted up to 2 metres away.

EN = Energy Saving evaporator.

H = Height

W = Width

L = Length

Cod.	Ref	Lt	Dim mm	Weight Kg	W	UM	€
1544141	C42L	42	W380 x L384 x H532	16	31	PCS	
1544174	C75L	75	W470 x L460 x H622	20	40	PCS	
1544175	C75LA EN	75	W470 x L460 x H622	20	40	PCS	
1544195	C95LA EN	95	W485 x L471 x H792	24	45	PCS	
1545130	C130L	130	W525 x L565 x H767	27	45	PCS	
1545150	SLIM150	140	W417 x L400 x H1513	42	47	PCS	



VITRIFRIGO

Vitrifrigo Internal Cooling Unit Refrigerators

Vitrifrigo refrigerator with internal 12/24V dual voltage Danfoss cooling unit.

EN = Energy Saving evaporator.

H = Height

W = Width

L = Length

Cod.	Ref	Lt	Dim mm	Weight Kg	W	UM	€
1546139	C39i	39	W390 x L397 x H547	17	31	PCS	
1546149	C50i	50	W396 x L397 x H636	17	40	PCS	
1546160	C60i EN	60	W470 x L457 x H622	20	40	PCS	
1546185	C85i EN	85	W485 x L469 x H791	25	45	PCS	
1547118	C115i EN	115	W525 x L560 x H766	23	45	PCS	



VITRIFRIGO

Vitrifrigo External Cooling Unit S/Steel Refrigerators

18/8 Stainless Steel external frame Vitrifrigo refrigerator with 12/24V dual voltage Danfoss cooling unit.

With sliding profile for standard or flush door installation.

EN = Energy Saving evaporator.

H = Height

W = Width

L = Length

Cod.	Ref	Lt	Dim mm	Weight Kg	Consumption W	UM	€
1548142	C42LX	42	W398 x L377 x H535	17	31	PCS	
1548167	C75LAX EN	75	W488 x L452 x H625	23	40	PCS	
1548173	C130LAX EN	130	W543 x L555 x H766	31	45	PCS	



VITRIFRIGO

Vitrifrigo Internal Cooling Unit American Refrigerators

Vitrifrigo compact refrigerators with internal 12/24V dual voltage Danfoss cooling unit.

Dimensions are suitable to American boats.

H = Height

W = Width

L = Length

Cod.	Ref	Lt	Dim mm	Weight Kg	W	UM	€
1544151	C51i	51	W380 x L501 x H532	17	40	PCS	



VITRIFRIGO

Vitrifrigo Refrigerators Frames

Vitrifrigo refrigerators old type frames without sliding profile.

Allows recessed installation of the refrigerator with flushed door.

Cod.	For Refrigerator	UM	€
1549011	C39	PCS	
1549012	C42/C51	PCS	
1549013	C50	PCS	
1549014	C60/C75/C90	PCS	
1549015	C85/C95	PCS	
1549010	C115/C130	PCS	



VITRIFRIGO

Vitrifrigo External Cooling Unit Drawer Refrigerators

Vitrifrigo drawer refrigerators with external 12/24V dual voltage Danfoss cooling unit that can be mounted up to 2 meters away.

H = Height

W = Width

L = Length

Cod.	Ref	Lt	Dim mm	Weight Kg	W	UM	€
1544342	C42DW	42	W380 x L342 x H532	19	31	PCS	
1544375	C75DW	75	W470 x L418 x H622	23	75	PCS	



VITRIFRIGO

**Vitrifrigo External Cooling Unit S/Steel Drawer Refrigerators**

Vitrifrigo external casing Stainless Steel drawer refrigerators with 12/24V external Danfoss cooling unit.

With sliding profile for standard or flush door installation.

The 75-liter model is equipped with a 10-liter freezer compartment.

H = Height

W = Width

L = Length

Cod.	Ref	Lt	Dim mm	Weight Kg	Consumption W	UM	€
1548235	DW35RFX	35	W450 x L552 x H285	24	31	PCS	
1548242	DW42RFX	42	W398 x L377 x H535	21	31	PCS	
1548275	DW75RFX	75	W488 x L452 x H625	26	40	PCS	



VITRIFRIGO

**Vitrifrigo Internal Cooling Unit Drawer Refrigerators**

Vitrifrigo drawer refrigerators with internal 12/24V dual voltage Danfoss cooling unit.

H = Height

W = Width

L = Length

Cod.	Ref	Lt	Dim mm	Weight Kg	W	UM	€
1544351	C51DW	51	W380 x L482 x H532	20	40	PCS	
1544390	C90DW	90	W470 x L515 x H622	25	45	PCS	



VITRIFRIGO

**Vitrifrigo Internal Cooling Unit S/Steel Drawer Refrigerators**

Vitrifrigo external casing Stainless Steel drawer refrigerators with 12/24V internal Danfoss cooling unit. With sliding profile for standard or flush door installation.

H = Height

W = Width

L = Length

Cod.	Ref	Lt	Dim mm	Weight Kg	Consumption W	UM	€
1548251	DW51RFX	51	W395 x L515 x H531	22	40	PCS	
1548290	DW90RFX	90	W485 x L548 x H621	28	45	PCS	



VITRIFRIGO




Vitrifrigo DRW180A All-In-One Internal Cooling Unit Drawer Refrigerator

Vitrifrigo Stainless Steel external casing all-in-one refrigerator with 12/24V internal Danfoss cooling unit. Composed of two drawer compartments with customized functions that can be customized using a waterproof touch screen panel. Each drawer can be set as a fridge or a freezer, each one at the desired temperature. Complete with ventilation system that prevents ice from forming and a frame for flush door installation.

H = Height
W = Width
L = Length

Cod.	Lt	Dim mm	Weight Kg	W	UM	€
1548250	70 + 80	W617 x L595 x H874	55	120	PCS	

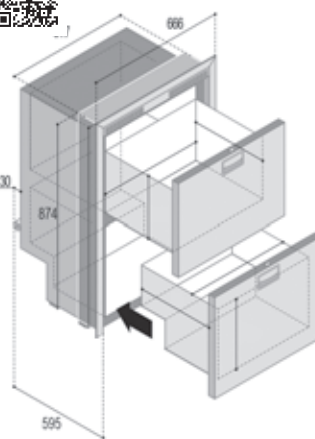


VITRIFRIGO

VF DW180 Combo Internal Compressor S/Steel Drawer Refrigerators

External casing Stainless Steel drawer refrigerators with 12/24V internal Danfoss compressor. Composed of two drawer compartments with customized functions. Complete with frame for flush door installation. The Icemaker types are powered 115/230 V.

H = Height W = Width L = Length

Cod.	Ref	Lower Drawer	Upper Drawer	Lt	Dim mm	Weight Kg	Consumption W	UM	€
1548210	DW180 RFX	Refrigerator	Refrigerator	64 + 80	W617 x L590 x H857	55	45	PCS	
1548211	DW180 DTX	Refrigerator	Freezer	64 + 80	W617 x L590 x H857	55	61	PCS	
1548212	DW180 DTX IM	Refrigerator	Icemaker	64 + 80	W617 x L590 x H857	60	140 (230V)	PCS	
1548215	DW180 BTX	Freezer	Freezer	64 + 80	W617 x L590 x H857	55	45	PCS	
1548216	DW180 BTX IM	Freezer	Icemaker	64 + 80	W617 x L590 x H857	60	140 (230V)	PCS	

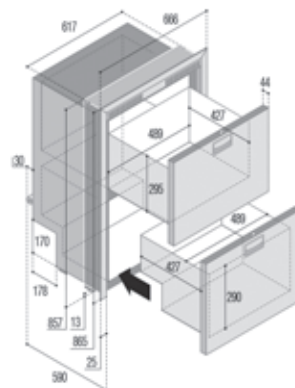

VITRIFRIGO

Vitrifrigo Wine Cellar Refrigerators

Wine cellar refrigerators ideal for storing bottles of wine and champagne. Tinted glass with UV protection, brushed Stainless Steel finish and internal LED lighting. Temperature regulation with digital thermostat from +4° to +18°C. 12/24/220V multivoltage Danfoss internal cooling unit.

H = Height
W = Width
L = Length

Cod.	Max bottles	Lt	Dim mm	Weight Kg	Consumption W	UM	€
1543246	12	46	W430 x L470 x H520	18	200 (220V)	PCS	
1543262	20	62	W430 x L470 x H650	21	400 (220V)	PCS	



VITRIFRIGO

TL40L Top Loading Refrigerator

Top loading refrigerator with external 12/24V dual voltage Danfoss cooling unit. Consumption 31W.

H = Height
W = Width
L = Length

Cod.	Lt	Dim mm	Weight Kg	UM	€
1543039	40	W400 x L400 x H380	10	PCS	



VITRIFRIGO

Danfoss Horizontal Cooling Unit

Horizontal 12/24V Danfoss cooling unit with cooling fan and Vitrifrigo type quick couplings. To be completed with evaporator of your choice with Vitri type joints.



VITRIFRIGO

Cod.	Ref	Dim mm	Kg	For Units Lt	UM	€
1555025	ND35OR	150 x 275 x H160	5,6	<130	PCS	
1555028	ND50OR2	135 x 360 x H155	5,6	120>360	PCS	

**Danfoss Vertical Cooling Unit**

Vertical 12/24V Danfoss cooling unit with cooling fan and Vitrifrigo type quick couplings. To be completed with evaporator of your choice with Vitri type joints.




VITRIFRIGO

Cod.	Ref	Dim mm	Kg	For Units Lt	UM	€
1555026	ND35VR	210 x 135 x H230	5,6	<130	PCS	

**Refrigerator's Energy Saver Type Evaporators**

Stainless Steel cold-accumulation energy-saver evaporators with Vitri type quick couplings. Perfect for sailing boats, where constant battery recharging is difficult.

Cod.	Ref	Dim mm	For Units Lt	Accessories	UM	€
1555410	AC10	275 x 290 x H60	<110		PCS	
1555420	AC20	325 x 355 x H70	<220		PCS	
1555430	AC30	355 x 415 x H70	<270		PCS	
1555450				2 m Coupling Extension Pipe	PCS	
1555455				4 m Coupling Extension Pipe	PCS	



VITRIFRIGO

**Refrigerator's Flat Type Evaporators**

Flat type evaporators with 2 meter Vitri type quick refrigerator couplings. They can be folded and adapted to the shape of the refrigerator compartment.

Cod.	tRef	Dim mm	For Units Lt	UM	€
1555202	PT2	350 x H250	<60	PCS	
1555203	PT3	585 x H210	<80	PCS	
1555204	PT4	350 x H350	<110	PCS	




VITRIFRIGO

**Refrigerator's Box Type Evaporators**

Boxed evaporator with 2 meter Vitri type quick refrigerator couplings.

VITRIFRIGO


Cod.	Ref	Dim mm	For Units Lt	UM	€
1555301	S8	247 x 210 x H88	<80	PCS	
1555303	S3	318 x 210 x H96	<130	PCS	

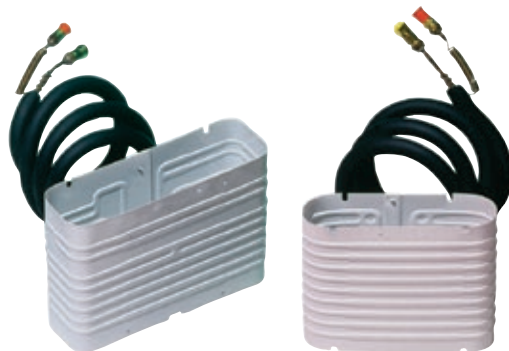**Refrigerator's Thermostat**

Refrigerator's thermostat.

VITRIFRIGO

Cod.	Ref	UM	€
1555010	For Refrigerators (+15/-15 C°)	PCS	
1555011	For Freezers (-12/-28 C°)	PCS	

**220V Adapter**

220V power supply adapter for double voltage direct current 12/24V refrigerators. With protection from power surges. Not suitable for refrigerators with 12V only.

VITRIFRIGO

Cod.	UM	€
1555234	PCS	

**Refrigerator Spare Electronic Unit**

Spare electronic unit to be used with Vitrifrigo refrigerators and freezers.



VITRIFRIGO

Cod.	For Refrigerators with Power Supply	UM	€
1555238	12/24V	PCS	
1555239	12/24V + 115/220V	PCS	



Dometic NRX External Cooling Unit Refrigerators

Dometic NRX refrigerators 12/24V. External (non-removable) variable speed cooling unit for 25% less energy consumption. Removable freezer compartment. The touch control panel allows to set to cooling function only, freezing function only or both functions at the same time. With LED light, full-width handle, dark grey front panel and standard or flush mount installation frame available as accessory.

H = Height
W = Width
L = Length

Cod.	Ref	Lt	Dim mm	Kg	UM	€
1549051	NRX 50	39.6 + Freezer 4.4	W380 x L510 x H525	17	PCS	
1549061	NRX 60	48.9 + Freezer 6.1	W448 x L537 x H525	17	PCS	
1549081	NRX 80	68.4 + Freezer 6.6	W475 x L537 x H625	20	PCS	
1549115	NRX 115	104.5 + Freezer 8.2	W525 x L568 x H745	25	PCS	



New



Dometic CoolMatic CRD External Cooling Unit Drawer Refrigerators


Dometic CoolMatic CRD drawer refrigerators 12/24V. External (non-removable) variable speed cooling unit for 25% less energy consumption. Removable freezer compartment. The touch control panel allows to set to cooling function only, freezing function only or both functions at the same time. With LED light. Silver type door and standard or flush mount installation frame available as accessory.

H = Height
W = Width
L = Length

Cod.	Ref	Lt	Dim mm	Kg	Consumption W	UM	€
1549150	CRD 50	46.7 + Freezer 6	W380 x L500 x H534	19	45	PCS	
1549165	CRX 65D	50.5 + Freezer 7	W448 x L545 x H525	20	45	PCS	



DOMETIC



Dometic Refrigerators Frames

Dometic refrigerators finishing frames for refrigerator installation with flushed door or with standard door. The NRX model refrigerator frames, dark silver varnished, allow both flush and standard refrigerator door installation.



Cod.	Mounting	For Refrigerator	UM	€
1549421	Flush-Mount / Standard	NRX50	PCS	
1549422	Flush-Mount / Standard	NRX60	PCS	
1549423	Flush-Mount / Standard	NRX80	PCS	
1549401	Flush-Mount	CRX50 / CRD50	PCS	
1549402	Flush-Mount	CRX65 / CRX65D	PCS	
1549403	Flush-Mount	CRX80	PCS	
1549404	Flush-Mount	CRX110	PCS	
1549405	Flush-Mount	CRX140	PCS	
1549411	Standard	CRX50 / CRD50	PCS	
1549412	Standard	CRX65 / CRX65D	PCS	
1549413	Standard	CRX80	PCS	
1549414	Standard	CRX110	PCS	
1549415	Standard	CRX140	PCS	



NRX



CRX



CRX

DOMETIC

Dometic CoolMatic CD20 External Cooling Unit Drawer Refrigerator

Drawer refrigerator with external 12/24V cooling unit remotable up to max 1.5m and adjustable temperature control. The compact design allows to make the most of small spaces.

H = Height

W = Width

L = Length



Cod.	Ref	Lt	Dim mm	Weight Kg	UM	€
1549170	CD20S S/STEEL	20	W440 x L564 x H250	16,8	PCS	
1549172	CD20 WHITE	20	W440 x L564 x H250	16,1	PCS	



DOMETIC

Dometic CoolMatic CD30 External Cooling Unit Drawer Refrigerator

Drawer refrigerator with external 12/24V cooling unit remotable up to max 1.5m and adjustable temperature control. The compact design allows to make the most of small spaces.

H = Height

W = Width

L = Length



Cod.	Ref	Lt	Dim mm	Weight Kg	UM	€
1549174	CD30S S/STEEL	30	W440 x L730 x H250	19,7	PCS	
1549176	CD30 WHITE	30	W440 x L730 x H250	19,3	PCS	




DOMETIC

- DOMETIC REFRIGERATION UNIT SYSTEMS -**Dometic ColdMachine Refrigeration Unit**

High performance Dometic ColdMachine compact refrigeration unit. Easy to install in any fridge or cold room up to 200 liters with 2cm of insulation, simply drill and connect the battery. Fast air circulation cooling capacity, thermostat control setting, overload protection and under voltage automatic power off.



Cod.	Dim mm	V	UM	€
1556515	258 x 227 x H363	12/24	PCK	

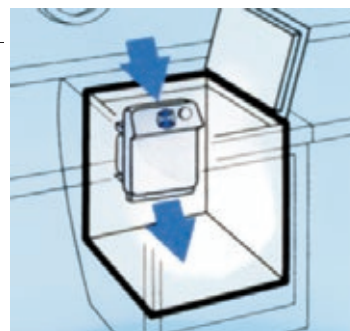

DOMETIC

50 Series Dometic Cooling Unit

Very quiet cooling unit with power regulation, pre-charged refrigerant and self-sealing valve couplings for easy assembly. Corrosion-resistant Stainless Steel mounting plate for long life.

For refrigeration systems that include:

1 x 12/24V dual voltage cooling unit

1 x Evaporator with Dometic type couplings

Cod.	Ref	Dim mm	Kg	For Units Lt	UM	€
1555114	CU54 Horizontal	386 x 130 x H165	6	<130	PCS	
1555115	CU55 Vertical	220 x 220 x H160	6,5	<130	PCS	

**80 Series Dometic Cooling Unit**

Very quiet cooling unit with power regulation, pre-charged refrigerant and self-sealing valve couplings for easy assembly. Corrosion-resistant Stainless Steel mounting plate for long life.

For refrigeration systems that include:

1 x 12/24V dual voltage cooling unit

1 x Evaporator with Dometic type couplings

Cod.	Ref	Dim mm	Kg	For Units Lt	UM	€
1555118	CU84 Horizontal	386 x 130 x H160	6	<250	PCS	
1555119	CU85 Vertical	220 x 220 x H160	6	<250	PCS	

**VD-01 L Dometic Evaporator**

L-shaped evaporator for Series 50 refrigeration units. Cooling capacity: 100 Lt max (with 50 mm PU insulation). Complete with LED light thermostat and Dometic type self-sealing valve couplings for easy assembly.

Cod.	Ref	Dim mm	For Units Lt	UM	€
1555101	VD-01	300 x 110 x H270	<100	PCS	

**VD-07 O Dometic Evaporator**

O-shaped evaporator for Series 50 refrigeration units. Cooling capacity: 100 Lt max (with 50 mm PU insulation). Complete with LED light thermostat and Dometic type self-sealing valve couplings for easy assembly.

Cod.	Ref	Dim mm	For Units Lt	UM	€
1555103	VD-07	255 x 90 x H210	<100	PCS	

**VD-04 L Dometic Evaporator**

L-shaped evaporator for Series 80 refrigeration units. Cooling capacity: 170 Lt max (with 50 mm PU insulation). Complete with LED light thermostat and Dometic type self-sealing valve couplings for easy assembly.

Cod.	Ref	Dim mm	For Units Lt	UM	€
1555105	VD-04	375 x 120 x H285	<170	PCS	

**VD-09 O Dometic Evaporator**

O-shaped evaporator for Series 80 refrigeration units. Cooling capacity: 180 Lt max (with 50 mm PU insulation). Complete with LED light thermostat and Dometic type self-sealing valve couplings for easy assembly.

Cod.	Ref	Dim mm	For Units Lt	UM	€
1555109	VD-09	270 x 365 x H141	<180	PCS	

**MPS 35 240V>24V Adapter**

220V power supply adapter for double voltage direct current 12/24V refrigerators. With protection from power surges. Not suitable for refrigerators with 12V only.

Cod.	UM	€
1555122	PCS	



Vitrifrigo MACS Air Conditioner

Vitrifrigo MACS air-condition system designed for marine applications, ideal for cooling a single room or two neighbouring rooms. It uses a seawater circuit and works as an air conditioner with cold air and as a heater with hot air. Compact monobloc system complete with compressor, condenser, evaporator, vent and a control panel with 3 meter extension cable and remote control. Electrical panel with 1.2 meter extension and 220V power supply for use with shorepower or with a generator.

Supplied without accessories such as hoses, grills, water pump, filter and intake strainer which must be purchased separately.



Consumption and flow rate:

MACS 7000: 600W/2.6A (700W/3.0A in heating mode), flow rate 400 mc/h

MACS 12000: 890W/4.0A (1100W/4.7A in heating mode) flow rate 540 mc/h

MACS 16000: 1100W/5.0A (1300W/5.5A in heating mode) flow rate 640 mc/h

Cod.	Ref	Cooling Btu/h	Heating Btu/h	Weight Kg	UM	€
1560330	MACS 7000	7000	7800	23	PCK	
1560332	MACS 12000	12000	13000	26	PCK	
1560334	MACS 16000	16000	18000	31	PCK	

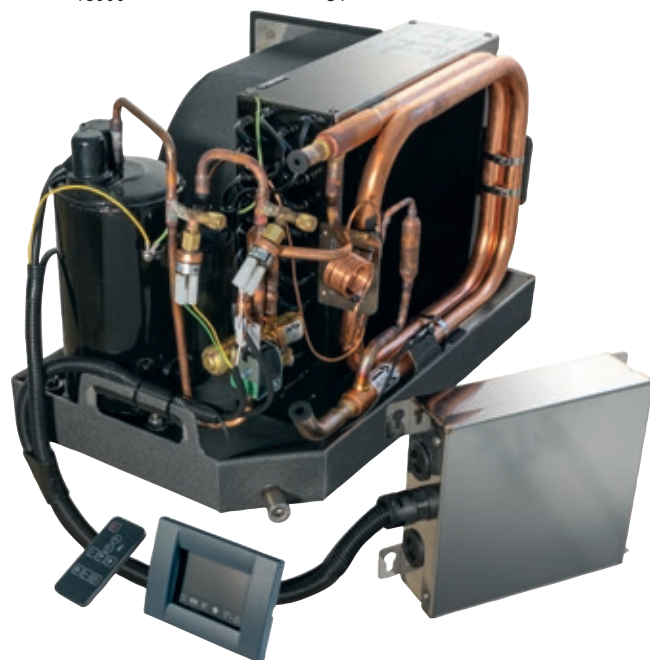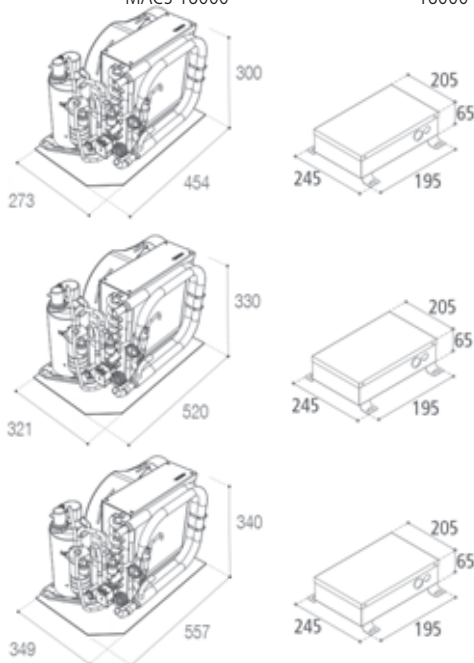**MACS Air-Conditioners Accessory Kit**

Accessory kit required to complete MACS air conditioners.

MACS 7000:

4 pcs 16 mm pipe-to-hose connector, sea water intake and ball valve, all in Brass with 1/2 thread

1/2 Chromed Brass thru-hull connection

sea water filter with 1/2 connections

220V/40W/0.2A sea water pump with 2 x 16 mm connections

16 mm spiral water hose L10 meters

102 mm L5 meter flexible air duct

return air grille with frame 280 x 280 mm / recessed hole 250 x 250 mm

supply grille with frame 130 x 280 mm / recessed hole 100 x 250 mm

MACS 12000:

4 pcs 20 mm pipe-to-hose connector, sea water intake and ball valve, all in Brass with 3/4 thread

3/4 Chromed Brass thru-hull connection

sea water filter with 3/4 connections

220V/40W/0.4A sea water pump with 2 x 20 mm connections

20 mm spiral water hose L10 meters

152 mm L5 meter flexible air duct

return air grille with frame 335 x 335 mm / recessed hole 300 x 300 mm

supply grille with frame 155 x 280 mm / recessed hole 120 x 250 mm

MACS 16000:

4 pcs 25 mm pipe-to-hose connector, sea water intake and ball valve, all in Brass with 1" thread

1" Chromed Brass thru-hull connection

sea water filter with 1" connections

220V/80W/0.7A sea water pump with 2 x 25 mm connections

25 mm spiral water hose L10 meters

152 mm L5 meter flexible air duct

return air grille with frame 335 x 335 mm / recessed hole 300 x 300 mm

supply grille with frame 180 x 330 mm / recessed hole 150 x 300 mm

Cod.	Ref	UM	€
1560331	MACS 7000	PCK	
1560333	MACS 12000	PCK	
1560335	MACS 16000	PCK	




**Teak Return Air Grids**

Return air grids with Teak frame for air conditioning systems. Complete with filter, to be mounted in contact with the air conditioning compartment and do not require air divider or fittings.



VITRIFRIGO

Cod.	Recess Hole mm	UM	€
1560350	150 x 300	PCS	
1560352	250 x 250	PCS	
1560353	300 x 300	PCS	


**Teak Supply Grids**

Supply grids with Teak frame for air conditioning systems. To be connected to the air duct by the air divider and the hose fixing ring.



VITRIFRIGO

Cod.	Recess Hole mm	UM	€
1560360	150 x 100	PCS	
1560361	200 x 100	PCS	
1560362	250 x 100	PCS	
1560363	250 x 125	PCS	
1560364	250 x 150	PCS	
1560366	300 x 150	PCS	
1560367	350 x 150	PCS	

**Air Divider and Fittings**

Air divider and fittings to connect the supply grid to the air conditioning system. The Y-shaped air divider is used to make a second supply line. The insulated PVC air duct is flexible with a deformable section to be easily connected to the air divider hose fixing ring. The hose ring is supplied as standard on the small air dividers, it must be purchased separately on the larger models.



VITRIFRIGO

Cod.	Ref	Recess Hole mm	UM	€
1560370	Air Divider with Ring D102	150 x 100	PCS	
1560371	Air Divider with Ring D102	200 x 100	PCS	
1560373	Air Divider	250 x 125	PCS	
1560374	Air Divider	250 x 150	PCS	
1560375	Air Divider	300 x 150	PCS	
1560376	Air Divider	350 x 150	PCS	
1560378	Hose Ring D127	350 x 150	PCS	
1560380	Hose Ring D152		PCS	
1560385	Y Air Divider for D152/152/102		PCS	
1560345	Air Duct D102 L5 m		PCS	
1560346	Air Duct D127 L5 m		PCS	
1560347	Air Duct D152 L5 m		PCS	

**Water Pump for MACS Air Conditioners**

Spare sea water pump for MACS air conditioners.

1560325: 220V/40W/0,2A/24Lt/min with 2 x 16 mm connections

1560326: 220V/40W/0,4A/37Lt/min with 2 x 20 mm connections

1560327: 220V/80W/0,7A/56Lt/min with 2 x 25 mm connections



New

VITRIFRIGO

Cod.	Ref	UM	€
1560325	MACS 7000	PCS	
1560326	MACS 12000	PCS	
1560327	MACS 16000	PCS	

**MACS Control Panel**

Replacement control panel for new type MACS air conditioners. Includes 12 x 8 cm Vimar panel, electronic board and 3 m data cable.



VITRIFRIGO


Cod.	UM	€
1560391	PCS	



Johnson Marine Boiler Water Heater

316 Stainless Steel Johnson Marine Boiler water heater designed for marine use. Works at shoreside or using a generator at 500W-220V electric resistance or, thanks to a special system, with engine's cooling circuit heat. 360° adjustable fixing feet for easy installation.

Cod.	Lt	L mm	ø mm	Weight Kg	Accessories	UM	€
1500802	22	485	325	10,0		PCS	
1500803	30	620	325	11,5		PCS	
1500804	45	880	325	15,0		PCS	
1500806	60	1065	325	17,3		PCS	
1500808	80	1285	325	20,0		PCS	
1500820					Mixing Valve Kit	PCS	

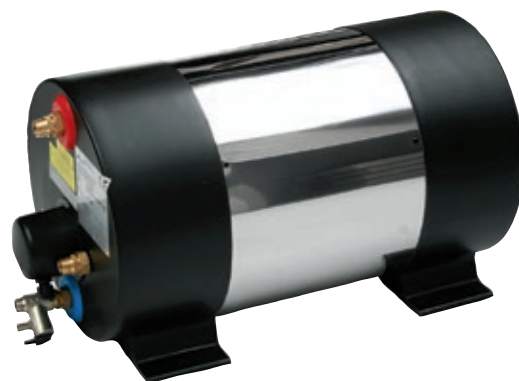SPXFLOW
Johnson Pump**BXR Nautic Boiler Water Heater**

Nautic Boiler water heater designed for marine use. Works at shoreside or using a generator at 1200W-220V electric resistance or, thanks to a special enveloping type heat exchanger, with engine's cooling circuit heat. Maintains water drinkable. Anode against electrolysis effect included. 316 Stainless Steel tank and insulation casing. 3 Years warranty. To be completed with mixing valve kit.

Cod.	Ref	Lt	L mm	ø mm	Weight Kg	Accessories	UM	€
1500620	BXR20	20	500	300	10,9		PCS	
1500628	BXR30	30	495	360	12,6		PCS	
1500640	BXR40	40	620	360	14,7		PCS	
1500650	BXR50	50	610	400	17,0		PCS	
1500660	BXR60	60	715	400	19,0		PCS	
1500680	BXR80	80	905	400	22,7		PCS	
1500821						Mixing Valve Kit	PCS	



Quick

B3 Nautic Boiler Water Heater

Nautic Boiler water heater designed for marine use. Works at shoreside or using a generator at 1200W-220V electric resistance or, thanks to a special enveloping type heat exchanger, with engine's cooling circuit heat. Maintains water drinkable. Anode against electrolysis effect included. 316 Stainless Steel tank and special composite insulation casing. 3 Years warranty. To be completed with mixing valve kit.

Cod.	Ref	Lt	L mm	ø mm	Weight Kg	Accessories	UM	€
1500601	B315	15	405	300	7,0		PCS	
1500602	B320	20	500	300	8,1		PCS	
1500603	B325	25	605	300	18,7		PCS	
1500604	B330	30	495	360	10,5		PCS	
1500605	B340	40	620	360	11,7		PCS	
1500606	B360	60	721	400	14,6		PCS	
1500821						Mixing Valve Kit	PCS	



Quick

BXS 25/40 Nautic Boiler Water Heater

Square Nautic Boiler water heater designed for marine use. Works at shoreside or using a generator at 1200W-220V electric resistance or, thanks to a special enveloping type heat exchanger, with engine's cooling circuit heat. Maintains water drinkable. Anode against electrolysis effect included. 316 Stainless Steel tank and insulation casing. 3 Years warranty. To be completed with mixing valve kit.

Cod.	Ref	Lt	Dim mm	Weight Kg	Accessories	UM	€
1500525	BXS25	25	330 x 370 x H330	13,5		PCS	
1500540	BXS40	40	380 x 445 x H380	17,0		PCS	
1500821					Mixing Valve Kit	PCS	



Quick

BX 16 Nautic Boiler Water Heater

Thin Nautic Boiler water heater designed for marine use. Works at shoreside or using a generator at 1200W-220V electric resistance or, thanks to a special enveloping type heat exchanger, with engine's cooling circuit heat. Maintains water drinkable. Anode against electrolysis effect included. 316 Stainless Steel tank and insulation casing. 3 Years warranty. To be completed with mixing valve kit.

Cod.	Ref	Lt	Dim mm	Weight Kg	Accessories	UM	€
1500516	BX16	16	180 x 520 x H395	10,5		PCS	
1500821					Mixing Valve Kit	PCS	



Quick

Johnson Manual Toilet

Johnson AquaT toilet with ergonomically designed double-acting self-priming hand-powered pump that can be mounted for either right or left hand. It works with both fresh and salt water and can be mounted above or below the waterline.

Available in three models:

- Compact – more compact for limited spaces with a round seat
- Comfort – larger and more comfortable with an oval seat
- Super Compact - smaller and lighter with a round seat

Made of exceptional quality white vitreous porcelain for perfect hygiene. Practical, quiet and reliable.

Strong swirl action for efficient flushing. Brass piston rod guide for increased service life.

Spring assisted top valve closure for easier priming.

Double check valves with at full 38 mm (1 1/2") bore to prevent back flow.

Multi-angle outlet for greater installation freedom.

Double sealed base plug for winter drain and easy cleaning access.


Accessible mounting points for faster installation without special tools.

Flexible hole pattern on the base, for easy substitution with the most common toilets on the market.

Inlet ø 20 mm (3/4") outlet ø 38 mm (1" 1/2).

3-year warranty.

SPXFLOW
Johnson Pump

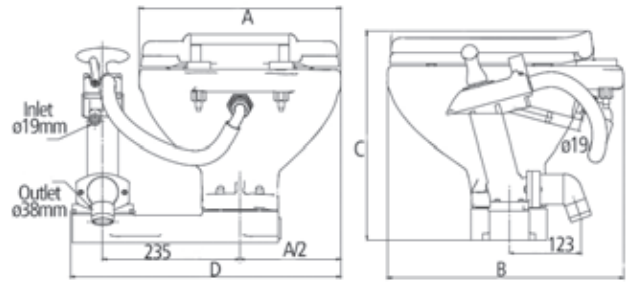

Cod.	Toilet	A mm	B mm	C mm	D mm	Spare Part	UM	€
1321500	AquaT Compact	340	400	350	455		PCS	
1321502	AquaT Comfort	365	470	330	465		PCS	
1321503	AquaT Super Compact	340	400	300	460		PCS	
1320304						Repair Kit	PCK	
1320317						Complete Pump	PCS	
1320318						Base	PCS	
1322019						Pole Top Seal	PCS	
1322020						Piston Seal	PCS	
1320031						ABS Compact Seat	PCS	
1320032						ABS Comfort Seat	PCS	
1320030						Lacquered Wood Compact Seat	PCS	



Compact Comfort SuperCompact


Jabsco Compact Manual Toilet

Jabsco Compact manual pump toilet with Twist & Lock system which avoids waste backflow for a superior safety and comfort on board.

Inlet ø 20 mm (3/4") outlet ø 38 mm (1" 1/2).



Cod.	Toilet	Spare Part	UM	€
1322001	Jabsco Twist & Lock		PCS	
1320006		Repair Kit	PCS	
1322422		Pole Top Seal	PCS	
1320017		Complete Pump	PCS	
1320016		Base	PCS	
1320031		ABS Compact Seat	PCS	
1320030		Lacquered Wood Compact Seat	PCS	

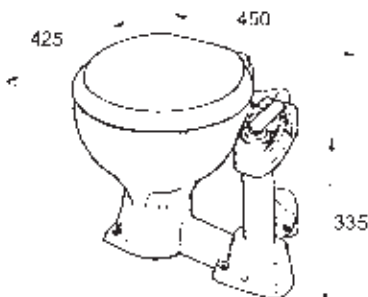



Johnson AquaT Standard Electric Toilet


Johnson AquaT Standard toilet equipped with a combined 12V or 24V pump for disposal and flushing: a centrifugal pump with macerator function for disposal and a silent impeller pump for filling water. It works with both fresh and salt water and can be mounted above or below the waterline.

SPXFLOW
Johnson Pump



Available in three models:

- Compact – more compact for limited spaces with a round seat
 - Comfort – larger and more comfortable with an oval seat
 - Super Compact – smaller and lighter with a round seat
- Made of exceptional quality white vitreous porcelain for perfect hygiene. Built-in rinse pump with strong swirl action for efficient flushing. Control panel included, one button multi function discharge and rinse. Accessible mounting points for faster installation without special tools. Flexible hole pattern on the base, for easy substitution with the most common toilets on the market. Inlet \varnothing 20 mm / outlet \varnothing 25 mm. 3-year warranty.

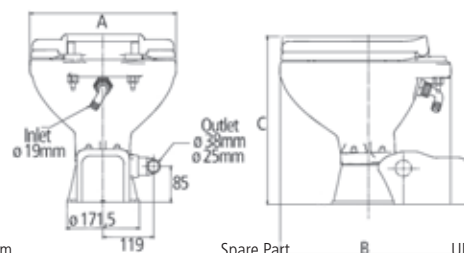

Cod.	Toilet	A mm	B mm	C mm	Spare Part	UM	€
1320012	Compact 12V	340	450	380		PCS	
1320024	Compact 24V	340	450	380		PCS	
1321012	Comfort 12V	365	475	360		PCS	
1321024	Comfort 24V	365	475	360		PCS	
1320011	Super Compact 12V	340	450	330		PCS	
1321030					Repair Kit	PCK	
1322018					Discharge Non-Return Valve	PCS	
1320031					ABS Compact Seat	PCS	
1320032					ABS Comfort Seat	PCS	
1320030					Lacquered Wood Compact Seat	PCS	



Compact



Comfort



SuperCompact

Johnson AquaT Silent Electric Toilet

Electronic water in/out control SPX Johnson AquaT Silent toilet. Two-button control panel included.

SPXFLOW
Johnson Pump



Features: minimum water consumption, great comfort and very silent.

Loading takes place with an external self-priming pump, while unloading with a built-in macerator pump.



Exceptional quality white vitreous porcelain bowl for perfect hygiene. It works with both fresh and salt water and can be mounted above or below the waterline.

The toilet comes complete with a water load pump Johnson code 10-13399-05 (12V) or 10-13399-06 (24V).

Inlet \varnothing 19 mm (3/4"), outlet \varnothing 38 mm (1 1/2") adjustable to 25 mm (1").

3-year warranty.

Cod.	Toilet	A mm	B mm	C mm	UM	€
1320022	Compact 12V	340	441	395	PCS	
1320023	Compact 24V	340	441	395	PCS	
1321022	Comfort 12V	365	456	375	PCS	
1321023	Comfort 24V	365	456	375	PCS	



Compact



Comfort


Standard Ocean Electric Toilet

Ocean Standard electric toilet: • Automatic water in/out control • Combined pump unit for waste drainage • Control panel • ABS seat with soft closing hinges • Shockproof and corrosion resistant materials • Non-return valve • Self-priming up to 1.5 meters in height • Reversible pump mounting • It can be mounted both above and below the waterline.

The macerator pump allows waste to be drained up to 3.5 meters in height.

Inlet ø 19 mm (3/4"), outlet ø 25/38 mm (1" 1/2).


Cod.	Toilet	Spare Part	UM	€
1320040	Compact 12V		PCS	
1320041	Compact 24V		PCS	
1320031		ABS Compact Seat	PCS	
1320030		Lacquered Wood Compact Seat	PCS	

**Ocean Evolution Electric Toilet**

Ocean Evolution electric toilet: • Minimal water consumption • Maximum silence • Automatic water in/out control • Combined pump unit for waste drainage up to 4 meters in height and 40 meters in distance • Control panel • Soft closing hinges seat • Shockproof base and corrosion resistant materials • Non-return valve • Pump mounting reversible to the left or to the right

It can be mounted both above and below the waterline. Discharging occurs with 360° swivelling 38 mm (1" 1/2) adjustable to 25 mm (1") port connection. Load diameter 19 mm.

Cod.	Toilet	Spare Part	UM	€
1320042	Compact 12V		PCS	
1320043	Compact 24V		PCS	
1320046	Comfort 12V		PCS	
1320047	Comfort 24V		PCS	
1320031		ABS Compact Seat	PCS	
1320032		ABS Comfort Seat	PCS	
1320030		Lacquered Wood Compact Seat	PCS	


**Jabsco Electric Toilet**

High capacity waste macerator Porcelain bowl Jabsco electric toilet. Single button easy actuator.

Self-priming at 1.20 m.


Inlet ø 19 mm / outlet ø 25 mm

Cod.	Toilet	Spare Part	UM	€
1322012	Compact 12V		PCS	
1322024	Compact 24V		PCS	
1322010		Repair Kit	PCK	
1320031		ABS Compact Seat	PCS	
1320030		Lacquered Wood Compact Seat	PCS	

**Jabsco Quiet E2 Electric Toilet**

Jabsco Quiet 37245 series Porcelain bowl electric toilet, quiet flow and high capacity macerator. Complete with control panel and self-priming water pump with filter, it also works with salt water. 19 mm water inlet fittings, 25 mm drain outlet fitting.

Cod.	Toilet	Spare Part	UM	€
1322032	Compact 12V		PCS	
1322034	Compact 24V		PCS	
1320031		ABS Compact Seat	PCS	
1320030		Lacquered Wood Compact Seat	PCS	



New


Ocean Standard Laguna Electric Toilet

Ocean Laguna Standard electric toilet:

- Automatic water in/out control
- Combined pump unit for waste drainage
- Control panel
- Soft closing hinges seat
- Shockproof and corrosion resistant materials
- Non-return valve
- Self-priming up to 1.5 meters in height
- Reversible pump mounting
- It can be mounted both above and below the waterline.

The macerator pump allows waste to be drained up to 3.5 meters in height. Inlet ø 19 mm (3/4"), outlet ø 38 mm (1" 1/2).

Cod.	V	UM	€
1322013	12	PCS	
1322014	24	PCS	

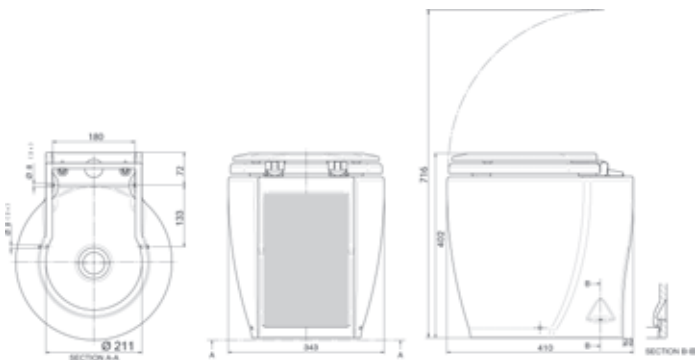

Ocean Luxury Standard Electric Toilet

Ocean Luxury Standard electric toilet:

- Great comfort (feels like home)
- Minimum water consumption
- Automatic water in/out control
- Combined pumping unit for waste disposal
- Digital control panel
- Duroplast seat with soft closing hinges cover
- Shockproof and corrosion resistant materials
- Non-return valve
- Self-priming up to 1.5 meters in height
- It can be mounted both above and below the waterline


It is equipped with an electronic switch to automatically regulate the water inlet and outlet in 2 different stages: first the bowl is filled with clean water, then the waste is discharged leaving the bowl empty and clean.

To be completed with water flush load pump.

When installing a series of toilets, a single water pump for all toilets and an electrovalve for each toilet head is needed. Inlet ø 19 mm (3/4"), outlet ø 25/38 mm (1" - 1 1/2).

Consumption 30A at 12V.

Cod.	Toilet Type	H mm	V	UM	€
1320212	Low	385	12	PCS	
1320224	Low	385	24	PCS	
1320232	Standard	455	12	PCS	
1320234	Standard	455	24	PCS	

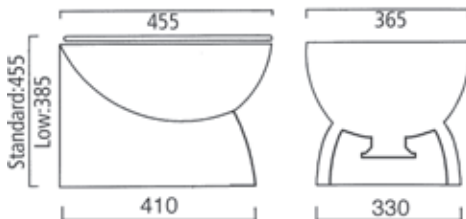


Ocean Silent Laguna Electric Toilet

Ocean Laguna Silent Hydrovacuum electronic toilet:

- Great comfort and very silent
 - Minimal water consumption
 - Automatic water in/out control
 - Combined pump unit for waste drainage
 - Control panel
 - Lacquered wooden soft closing hinges seat
 - Shockproof and corrosion resistant materials
 - Non-return valve
 - Self-priming up to 1.5 meters in height
 - It can be mounted both above and below the waterline A high-performance pump that allows waste disposal up to 7 meters in height and at a distance of 70 metres.
- It can use an automatic water system or a drain pump installed on board for water entry.
It is equipped with an electronic switch to automatically regulate the water inlet and outlet in 2 different stages: first the bowl is filled with clean water, then the waste is discharged leaving the bowl empty and clean.
To be completed with water flush load pump.
Inlet ø 19 mm (3/4"), outlet ø 38 mm (1" 1/2).

Cod.	V	UM	€
1322021	12	PCS	
1322022	24	PCS	

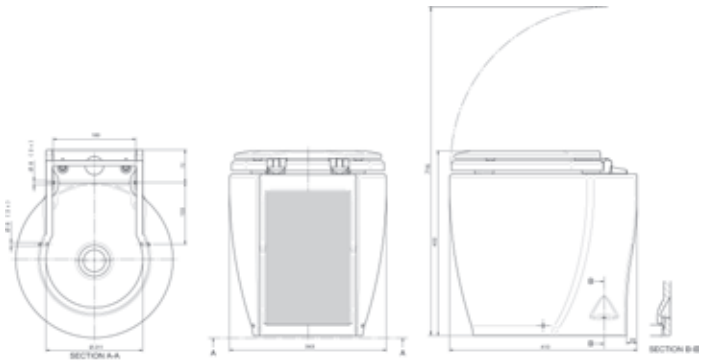


Ocean Luxury Silent Electric Toilet

Ocean Luxury Standard electric toilet:

- Maximum silence
 - Great comfort (feels like home)
 - Minimum water consumption
 - Automatic water in/out control
 - Combined pumping unit for waste disposal
 - Digital control panel
 - Duroplast seat with soft closing hinges cover
 - Shockproof and corrosion resistant materials
 - Non-return valve
 - Self-priming up to 1.5 meters in height
 - It can be mounted both above and below the waterline It can use an automatic water system or a drain pump installed on board for water entry.
- It is equipped with an electronic switch to automatically regulate the water inlet and outlet in 2 different stages: first the bowl is filled with clean water, then the waste is discharged leaving the bowl empty and clean.
To be completed with water flush load pump.
When installing a series of toilets, a single water pump for all toilets and an electrovalve for each toilet head is needed.
Inlet ø 19 mm (3/4"), outlet ø 25/38 mm (1"-1" 1/2).
Consumption 30A at 12V

Cod.	Toilet Type	H mm	V	Accessories	UM	€
1320072	Low	385	12		PCS	
1320074	Low	385	24		PCS	
1320082	Standard	455	12		PCS	
1320084	Standard	455	24		PCS	
1320476				12V Electrovalve	PCS	
1320478				24V Electrovalve	PCS	

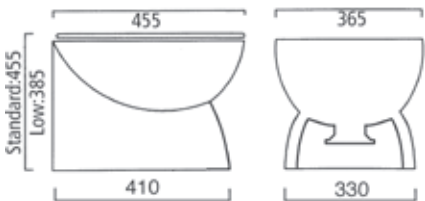

Toilet Control Switch

Panel control switch for 12/24V toilets.

Cod.	UM	€
1321216	PCS	

**Toilet Level Control Panel**

12/24V electric toilet control panel with waste water level indicator. Optional probe H13 cm.

Cod.	Dim mm	Accessories	UM	€
1321212	125 x 80		PCS	
1321220		Probe	PCS	

**Toilet Level Control Panel Vacuum**

12/24V vacuum toilet control panel with waste water level indicator. Optional probe H13 cm.

Cod.	Dim mm	Accessories	UM	€
1321214	125 x 80		PCS	
1321220		Probe	PCS	

**Seat-Saver**

Toilet seat-saver that secures seat and cover from sliding.

Cod.	UM	€
1323034	PR	

**Kit Bidet**


xxx

Cod.	UM	€
1324001	PCS	

**Seats and Covers**

Seats and covers for manual and electric marine toilets.

Cod.	Ref	Soft-Close	L x W mm	L1 x W1 mm	A mm	UM	€
1320031	ABS Compact Seat	No	315 x 335	225 x 240	140	PCS	
1320030	Lacquered Wood Compact Seat	No	315 x 335	225 x 240	140	PCS	
1320032	ABS Comfort Seat	Yes	400 x 365	260 x 215	140	PCS	
1320036	Polymer TE Luxury Seat	Yes	450 x 355	285 x 220	120	PCS	

**Jabsco Old Type Toilet Spares**

Jabsco old type toilet spare parts.

Cod.	Genuine Spare Part	UM	€
1320004	Repair Kit for Toilets after 1998	PCK	
1322417	Pole Top Seal	PCS	
1320017	Complete Pump	PCS	
1322418	Piston Seal	PCS	
1320016	Base	PCS	



Ocean Electric Toilet Conversion Kit

Electric Kit used to convert manual toilet into electric toilet. Easy to install, it replaces the manual pump. Fits any toilet with 4 bolt fixing bowls with 95 mm wheelbase as Ocean/TMC/Jabsco/Raritan/RM69/Johnson/Thetford/Lalizas. Overall length: 360 mm.

Cod.	Ref	UM	€
1320512	12V	PCS	
1320524	24V	PCS	

**Ocean Evolution Toilet Electric Conversion Kit**

Electric Kit used to convert a manual toilet into an electric Evolution type toilet. Easy to install, it replaces the manual pump. Equipped with a new generation silent pump with reduced water consumption. Fits any toilet with 4 bolt fixing bowls with 95 mm wheelbase as Ocean/TMC/Jabsco/Raritan/RM69/Johnson/Thetford/Lalizas. 360° orientable discharge port connection.

Cod.	Ref	UM	€
1320542	12V	PCS	
1320544	24V	PCS	

**Vacuum Electric Toilet Conversion Kit**

Electric Kit used to convert manual toilet into electric vacuum toilet. Easy to install, it replaces the manual pump and it is fitted with a water inlet/outlet electronic control with a very low 1-2.5 litres water consumption.

Cod.	Ref	UM	€
1320522	12V	PCS	
1320534	24V	PCS	

**Jabsco Base Electric Toilet Conversion Kit**

Electric Kit used to convert manual toilet into electric toilet. Easy to install, it replaces the manual pump.

Cod.	Ref	UM	€
1320712	12V	PCS	
1320724	24V	PCS	

**Jabsco Vertical Electric Toilet Conversion Kit**

Jabsco electric kit used to convert manual toilet into electric toilet. Easy to install, it replaces the manual pump.

Cod.	Ref	Spare Parts	UM	€
1320612	12V		PCS	
1320624	24V		PCS	
1320007		Gasket Kit	PCK	

**Universal Electric Toilet Conversion Kit**

Universal electric kit used to convert manual toilet into electric toilet. Easy to install, it replaces toilet's manual pump.

Cod.	Ref	UM	€
1320606	12V	PCS	




Tecma Nano Toilet

Thermosetting seat Tecma Nano compact toilet that combines comfort with the most reduced dimensions and still offers high performance. Endowed with powerful macerator pump, limited water and electrical consumption and low sound emissions. Installation and wiring are easy and quick, no maintenance is needed. It can be operated with two control panels: Eco panel: panel with add water/flush switches. All-in-One SFT panel: two-button panel with add water/flush switches. Smart Flush technology for low consumption and sound emissions. Complete with black water tank monitoring light and overflow protection function.

TECMA


Cod.	Toilet	Panel	UM	€
1326001	Nano 12V	Eco	PCS	
1326002	Nano 24V	Eco	PCS	
1326009	Nano 12V	All-in-One SFT	PCS	
1326010	Nano 24V	All-in-One SFT	PCS	

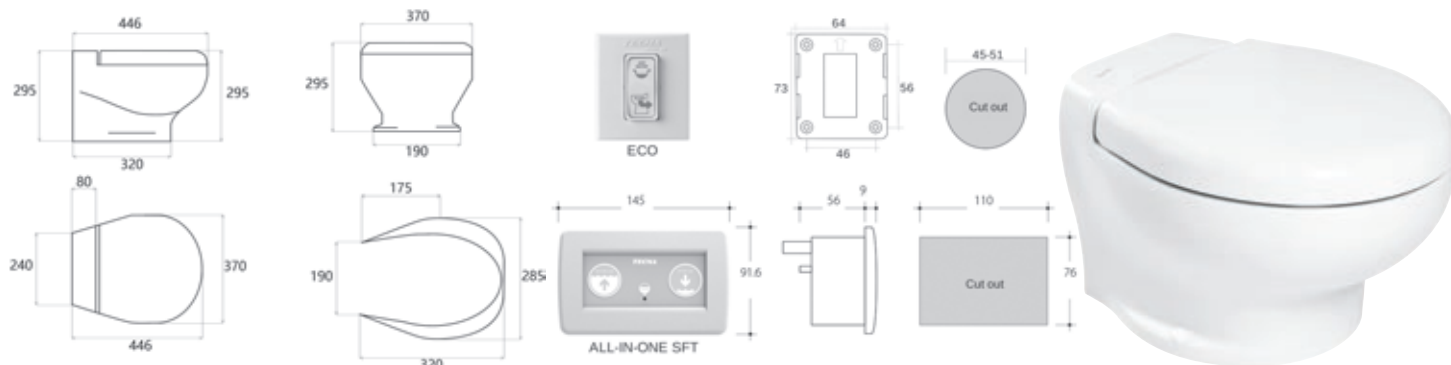**Tecma Compass Short Toilet**

Tecma Compass is a high level and versatility solution, ideal for boats from 30 to 50 feet. The shell geometry has been designed to fit to any hull type. Equipped with Polyester seat with soft closing system that avoids damage and noise and with superior quality macerator pump. Developed to keep water, electrical consumption and noise at minimum level. Installation and wiring are easy and quick, no maintenance is needed. Can be operated with two control panels: Eco panel: panel with add water/flush switches. All-in-One SFT panel: two-button panel with add water/flush switches. Smart Flush technology for low consumption and sound emissions. Complete with water overflow protection and waste tank monitoring.

TECMA


Cod.	Toilet	Panel	UM	€
1326003	Compass Short 12V	Eco	PCS	
1326004	Compass Short 24V	Eco	PCS	
1326011	Compass Short 12V	All-in-One SFT	PCS	
1326012	Compass Short 24V	All-in-One SFT	PCS	

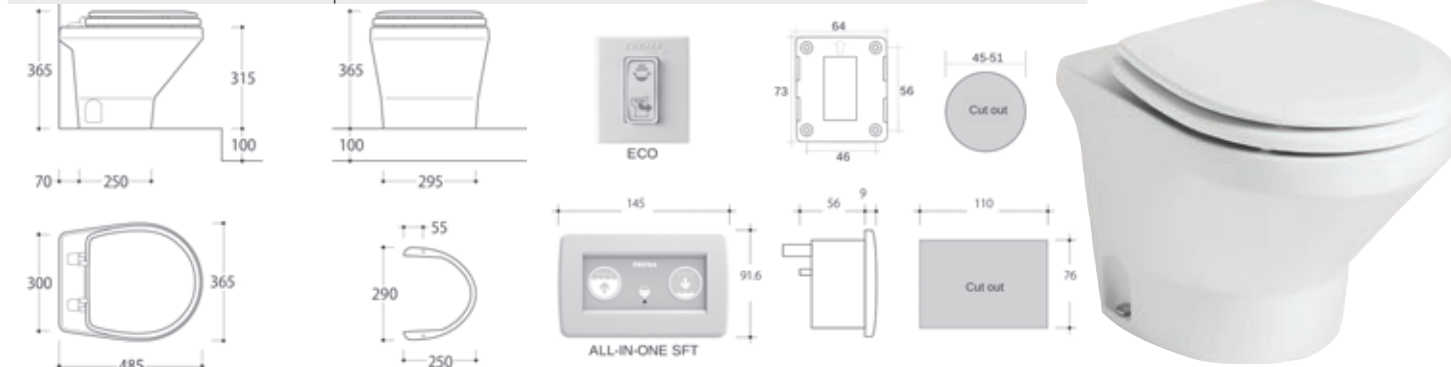**Sanisplit NK Water Transfer System**

Sanisplit NK is a powerful and silent pumping unit which transfers grey water from bidets, showers and washbasins. Endowed with one way valve and with pressure switch which activates as soon as water enters in the unit. Minimum height requirements from drain 200 mm.

TECMA

Cod.	Ref	Spare Parts	UM	€
1326310	Sanisplit NK 12V		PCS	
1326311	Sanisplit NK 24V		PCS	
1326312	Sanisplit NK 230V		PCS	
1326300		T-PF.SPLITFAS12V - 12V Motor	PCS	
1326301		T-PF.SPLITFAS24V - 24V Motor	PCS	
1326302		T-PF.SPLITFAS23 - 230V Motor	PCS	
1326303		T-PF.P58/NK Tank and Water Inlet/Outlet	PCS	
1326304		T-PF.P36 Level Sensor	PCS	

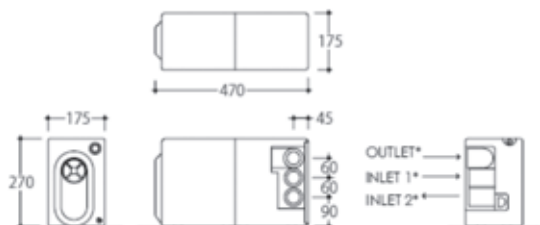


Tecma Breeze Toilet

Tecma Breeze toilet with smooth design that combines comfort and ergonomics. Thermosetting seat equipped with soft closing system that avoids damage and noise. Fast removing hinge system for fast and easy cleaning and maintenance. Developed to keep water, electrical consumption and noise to minimal levels. Installation and wiring are easy and quick, no maintenance is needed. Can be operated with two control panels: All-in-One SFT panel: two-button panel with add water/flush switches. Smart Flush technology for low consumption and sound emissions. Complete with water overflow protection and waste tank monitoring. Touch SFT panel: touch panel with add water/flush switches. Smart Flush technology for low consumption and sound emissions. Complete with water overflow protection with flow programming and waste tank monitoring. Can be set for cruise or dock mode.

TECMA



Cod.	Toilet	Panel	UM	€
1326014	Breeze 12V	All-in-One SFT	PCS	
1326015	Breeze 24V	All-in-One SFT	PCS	
1326018	Breeze 12V	Touch SFT	PCS	
1326019	Breeze 24V	Touch SFT	PCS	

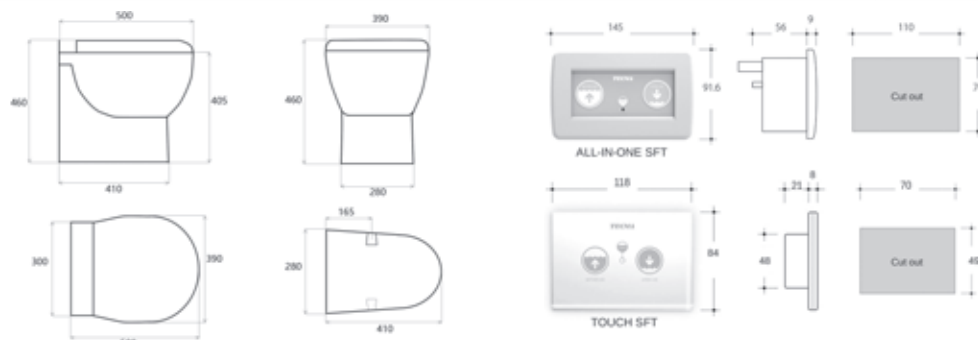
**Tecma Elegance 2G Toilet**

Tecma Elegance 2G toilet with stylish design that maximizes comfort within a limited space. Developed to keep water, electrical consumption and noise at minimum. Installation and wiring are easy and quick, no maintenance is needed. It can be operated with two control panels: All-in-One SFT panel: two-button panel with add water/flush switches. Smart Flush technology for low consumption and sound emissions. Complete with water overflow protection and waste tank monitoring. Touch SFT panel: touch panel with add water/flush switches. Smart Flush technology for low consumption and sound emissions. Complete with water overflow protection with flow programming and waste tank monitoring. Can be set for cruise or dock mode.

TECMA



Cod.	Toilet	Panel	UM	€
1326030	Elegance 2G 12V	All-in-One SFT	PCS	
1326032	Elegance 2G 24V	All-in-One SFT	PCS	
1326034	Elegance 2G 12V	Touch SFT	PCS	
1326036	Elegance 2G 24V	Touch SFT	PCS	

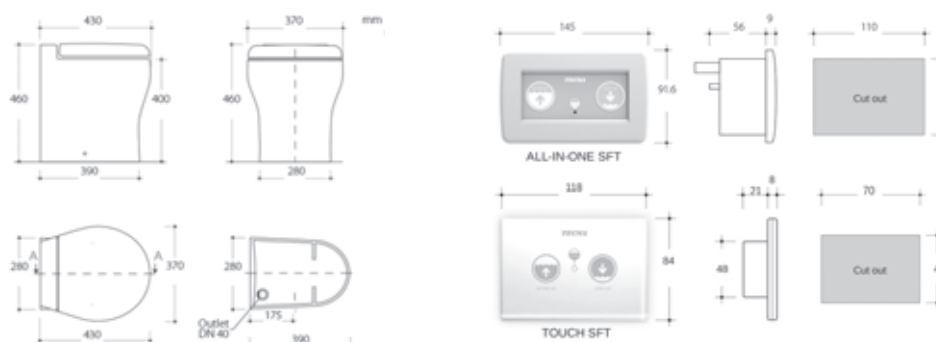
**Tecma Silence Plus 2G Toilet**

Tecma Silence Plus 2G toilet with stylish design that maximizes comfort within a limited space. Thermosetting seat equipped with soft closing system that avoids damage and noise. Developed to keep water, electrical consumption and noise at minimum. Installation and wiring are easy and quick, no maintenance is needed. It can be operated with two control panels: All-in-One SFT panel: two-button panel with add water/flush switches. Smart Flush technology for low consumption and sound emissions. Complete with water overflow protection and waste tank monitoring. Touch SFT panel: touch panel with add water/flush switches. Smart Flush technology for low consumption and sound emissions. Complete with water overflow protection with flow programming and waste tank monitoring. Can be set for cruise or dock mode.

TECMA




Cod.	Toilet	Panel	UM	€
1326040	Silence Plus 2G 12V	All-in-One SFT	PCS	
1326042	Silence Plus 2G 24V	All-in-One SFT	PCS	
1326044	Silence Plus 2G 12V	Touch SFT	PCS	
1326046	Silence Plus 2G 24V	Touch SFT	PCS	

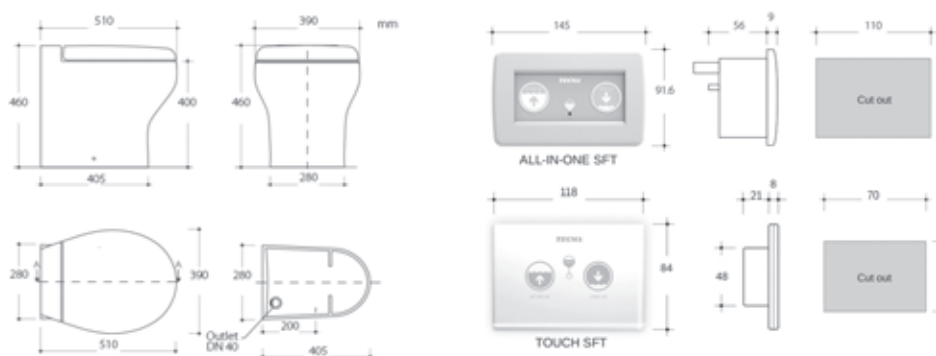

Compact Toilets Accessories and Spare Parts

Tecma Compact series (Nano and Compass) toilets accessories and spare parts.

Cod.	Genuine Code	Drawing Ref	Ref	UM	€
1326204	T-PF.P01C	1	12V Macerator Pump with Tube	PCS	
1326205	T-PF.P01D	1	24V Macerator Pump with Tube	PCS	
1326206	T-786	2	Discharge Tube Kit	PCS	
1326224	T-PF.P86	3	Discharge Non-Return Valve	PCS	
1326240	T-PF.P88	5	Macerator Mounting Bracket Kit	PCS	
1326145	T-PF.P03/B	6	Water Inlet Nozzle	PCS	
1326217	T-PF.P128	9	Eco 12V Control Panel Kit with Solenoid	PCS	
1326218	T-PF.P129	9	Eco 24V Control Panel Kit with Solenoid	PCS	
1326219	T-PF.P11B	10	All-in-One SFT 1 Button Wall Switch	PCS	
1326220	T-PF.P11	10	All-in-One SFT 2 Buttons Wall Switch	PCS	
1326221	T-PF.P11M2	10	All-in-One SFT 2 Buttons Multiframe Wall Switch	PCS	
1326222	T-PF.P11T2	10	Touch SFT Control Panel	PCS	
1326213	ECO12	11	12V Control Unit	PCS	
1326216	ECO24	11	24V Control Unit	PCS	
1326208	T-PF.P14/I	12	12V Solenoid	PCS	
1326209	T-PF.P15/I	12	24V Solenoid	PCS	
1309308	T-PF.P27	14	12V Water Inlet Pump	PCS	
1309309	T-PF.P28	14	24V Water Inlet Pump	PCS	
1326157	T-PF.P07	15	Tank Level Pneumatic Sensor	PCS	
1326158	T-PF.P07/C	15	Tank Level Double Pneumatic Sensor	PCS	
1326242	T-PF.P80	16	Floor Mounting Screws Kit	PCS	

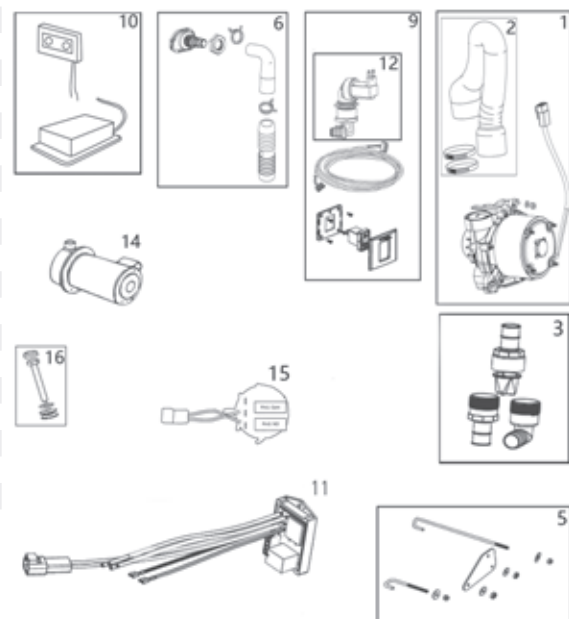**TECMA****Compact Toilets Seats and Hinges**

Tecma Compact series (Nano and Compass) toilets seats and hinges.

For Nano toilet: Thermosetting modern and light seat with cover hiding the seat.

For Compass toilet: Thermosetting classic and robust seat with cover and seat both visible.

Soft Closing: hinges with damper system to avoid damage and noise.


Cod.	Genuine Code	Toilet	Ref	UM	€
1326118	T-236TB	Nano	White TE Seat and Cover	PCS	
1326230	T-630	Nano	TE Seat Hinges	PCK	
1326203	T-1001TBFR	Compass	White TE Soft Closing Seat and Cover	PCS	

**TECMA**

Nano




Compass

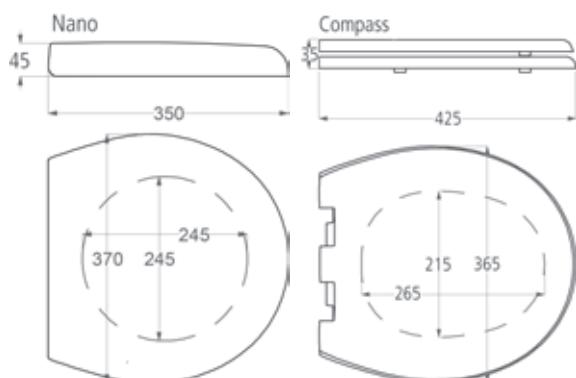

Design & Flexi Toilets Accessories and Spare Parts

Accessories and spare parts for toilets series Tecma Design (X-Light, Privilege, Evolution, Breeze) and Flexi (Silence, Elegance).

Cod.	Genuine Code	Drawing Ref	Ref	UM	€
1326129	T-PF.P01A	1	12V Macerator Pump	PCS	
1326130	T-PF.P01B	1	24V Macerator Pump	PCS	
1326131	T-PF.P109	1	230V Macerator Pump	PCS	
1326151	T-PF.P29/A_2G	2	Discharge Hose	PCS	
1326152	T-PF.P30	3	Non-Return Valve (no 2G)	PCS	
1326224	T-PF.P86	3	Non-Return Valve (2G)	PCS	
1326153	T-PF.P13/A_2G	4	Syphon Hose	PCS	
1326154	T-PF.P50_2G	5	Complete Rubber Kit	PCS	
1326128	T-PF.P32	6	Flexi Std Macerator Mounting Kit	PCS	
1326127	T-PF.P32/B	6	Flexi Short Macerator Mounting Kit	PCS	
1326126	T-PF.P32/C	6	Breeze Macerator Mounting Kit	PCS	
1326145	T-PF.P03/B	7	White Inlet Water Nozzle	PCS	
1326146	T-PF.P03/P	7	Ivory Inlet Water Nozzle	PCS	
1326148	T-PF.P03B/B	7	White Inlet Water Nozzle with Bidet	PCS	
1326149	T-PF.P03B/P	7	Ivory Inlet Water Nozzle with Bidet	PCS	
1326219	T-PF.P11B	8	1 Button All-in-One SFT Control Panel	PCS	
1326220	T-PF.P11	8	2 Button All-in-One SFT Control Panel	PCS	
1326221	T-PF.P11M2	8	2 Button All-in-One SFT Multiframe Control Panel	PCS	
1326222	T-PF.P11T2	8	Touch SFT Control Panel	PCS	
1326134	T-PF.P14/V	9	12V Invensys Solenoid	PCS	
1326135	T-PF.P15/V	9	24V Invensys Solenoid	PCS	
1326136	T-PF.P12/V	9	230V Invensys Solenoid	PCS	
1309308	T-PF.P27	10	12V Water Inlet Pump	PCS	
1309309	T-PF.P28	10	24V Water Inlet Pump	PCS	
1326157	T-PF.P07	11	Pneumatic Tank Sensor	PCS	
1326158	T-PF.P07/C	11	Double Pneumatic Tank Sensor	PCS	
1326124	T-896	12	Floor Mounting Screws Kit	PCS	

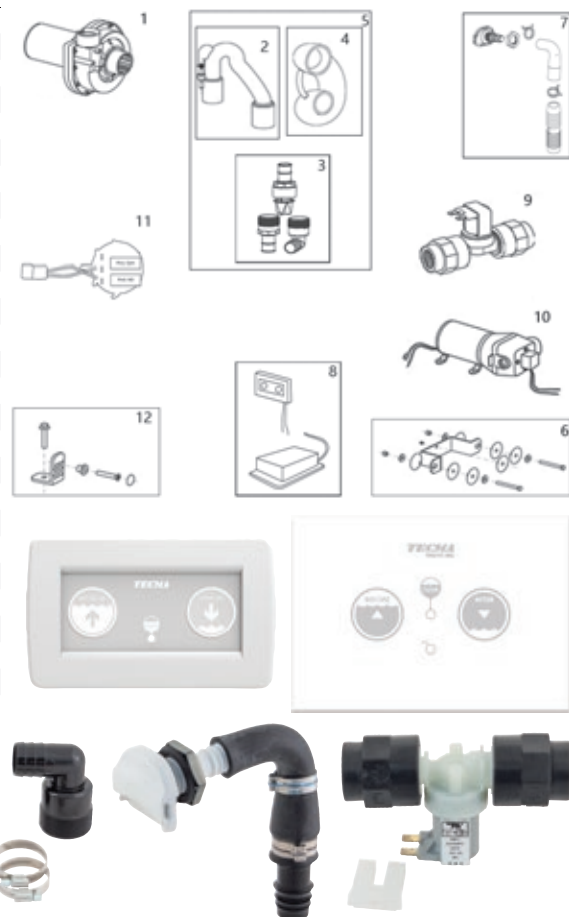**TECMA****Design & Flexi Toilets Seats and Hinges**




Design (Breeze) and Flexi (Silence, Elegance) toilets series seats and hinges.

PE: Polyester classic and robust seat with cover and seat both visible.

TE: Thermosetting modern and light seat with cover hiding the seat.

Soft Closing: hinges with damper system to avoid damage and noise.

Cod.	Genuine Code	For Toilet	Ref	UM	€
1326110	T-278TBFR/CN	Breeze	TE White Soft Closing Seat	PCS	
1326111	T-630/B	Breeze	TE Soft Closing Seat Hinges	PCK	
1326100	T-278	Silence Plus	PE White Seat	PCS	
1326101	T-278C	Silence Plus	PE Ivory Seat	PCS	
1326102	T-278TB	Silence Plus	TE White Seat	PCS	
1326150	T-278FR	Silence Plus	PE White Soft Closing Seat and Cover	PCS	
1326156	T-278TBFR	Silence Plus	TE White Soft Closing Seat	PCS	
1326104	T-596	Silence Plus / Elegance	PE Seat Hinges	PCK	
1326105	T-630	Silence Plus / Elegance	TE Seat Hinges	PCK	
1326172	T-PF.P83	Silence Plus	PE Soft Closing Seat Hinges	PCK	
1326173	T-630/F	Silence Plus / Elegance	TE Soft Closing Seat Hinges	PCK	
1326115	T-236	Elegance	PE White Seat	PCS	
1326116	T-236C	Elegance	PE Ivory Seat	PCS	
1326118	T-236TB	Elegance	TE White Seat	PCS	
1326170	T-236FR	Elegance	PE White Soft Closing Seat	PCS	
1326171	T-236TBFR	Elegance	TE White Soft Closing Seat	PCS	
1326174	T-PF.P84	Elegance	PE Soft Closing Seat Hinges	PCK	

**TECMA**

Johnson Macerator Pump

Johnson Macerator pump to empty waste tanks. Self-priming up to 2 m. Thermo-Polymer body. A rotary cutter shreds waste before it is pumped into or out from the holding tank. Inlet ø 38 mm / outlet ø 25 mm.



Cod.	V	Dim mm	Capacity at 0.2 bar	UM	€
1308202	12	230 x 82 x 108	37 Lt/min	PCS	
1308204	24	230 x 82 x 108	37 Lt/min	PCS	

**BW 40 Macerator Pump**

BW40 Macerator pump for toilet flushing. Self-priming up to 1.2 m. Thermo-Polymer body. A rotary cutter shreds waste before it is pumped into or out from the holding tank. Note: The pump should be connected as close as possible to the holding tank discharge outlet. Inlet ø 38 mm / outlet ø 25 mm.



Cod.	V	Dim mm	Capacity at 0.1 bar	UM	€
1308012	12	280 x 110	40 Lt/min	PCS	
1308024	24	280 x 110	40 Lt/min	PCS	

**Jabsco Macerator Pump**

Jabsco macerator pump for toilet flushing. Self-priming up to 1.2 m. Thermo-Polymer body. A rotary cutter shreds waste before it is pumped into or out from the holding tank. Note: The pump should be connected as close as possible to the holding tank discharge outlet. Inlet ø 38 mm / outlet ø 25 mm.



Cod.	V	Dim mm	Capacity at 0.1 bar	UM	€
1308212	12	281 x 92 x 106	40 Lt/min	PCS	
1308224	24	281 x 92 x 106	40 Lt/min	PCS	

**Ocean Macerator Pump**

Ocean Macerator Pump with Thermosetting Polymer head ideal for tanks and toilet flushing. Self-priming up to 2 m, vertical lift up to 5 m.. A rotary cutter shreds waste before it is pumped into or out from the holding tank. Note: The pump should be connected as close as possible to the holding tank discharge outlet. Inlet ø 38 mm / outlet ø 25 mm.



Cod.	V	Dim mm	Lt/min	UM	€
1309002	12	240 x 130 x 90	43	PCS	
1309004	24	240 x 130 x 90	43	PCS	

**Ocean Bronze Head Macerator Pump**

Bronze Ocean macerator pump for toilet flushing. Self-priming up to 2 m, vertical lift up to 5 m. A rotary cutter shreds waste before it is pumped into or out from the holding tank. Note: The pump should be connected as close as possible to the holding tank discharge outlet. Inlet ø 38 mm / outlet ø 25 mm.



Cod.	V	Dim mm	Lt/min	UM	€
1309012	12	270 x 130 x 90	47	PCS	
1309024	24	270 x 130 x 90	47	PCS	

**Jabsco Waste 19 Pump**

Robust Jabsco diaphragm pump, self-priming up to a height of 3m. For emptying grey or black water holding tanks, even with non-macerated waste. Quiet running, compact design and flexible installation thanks to the multi-positional head.



Cod.	Lt/min	ø Ports mm	Dim mm	V	UM	€
1825742	19	38 (1" 1/2)	155 x 277 x H111	12	PCS	
1825744	19	38 (1" 1/2)	155 x 277 x H111	24	PCS	

**Laguna Waste Water Pump 32**

Up to a 3m height self-priming Ocean diaphragm pump with double non-return valve. For emptying grey or black water holding tanks, or as a bilge pump. Can run dry, no filter required. Quiet running, compact design and flexible installation with multi-positional head.



Cod.	Lt/min	ø Ports mm	Dim mm	V	UM	€
1826018	32	38 (1" 1/2)	151 x 140 x H105	12	PCS	
1826020	32	38 (1" 1/2)	151 x 140 x H105	24	PCS	



Johnson Viking 16 Waste Pump


SPX Johnson Viking 16 self-priming diaphragm pump easy to install anywhere, can be set up in several different pump/motor configurations. It is used to discharge into the waste water system or as a bilge pump to empty even very dirty bilges. • Designed to empty waste water and bilges • Easy to install, even in tight spaces • Quiet operation • Easy and low-cost maintenance • High impact glass fiber reinforced nylon body • Ball-bearing supported transmission • Non-choke valves - no filters required • Self-priming up to 3m (9.8ft) • Can run dry and can pump air/water mixture • Robust (single) diaphragm • Standard KlickTite™ XL connectors • Low power consumption

Cod.	Johnson SPX Code	V	Dim mm	Lt/min	ø Ports mm	UM	€
1826032	10-13350-03	12	186 x 235 x H118	16	19 - 25	PCS	
1826034	10-13350-04	24	186 x 235 x H118	16	19 - 25	PCS	

**Johnson Viking 32 Waste Pump**


SPX Johnson Viking 32 heavy duty self-priming diaphragm pump. Easy to install anywhere, thanks to the 360° rotatable pump head it can be set up in several different pump/motor configurations. It is used as a bilge pump to empty even very dirty bilges. Thanks to its single-chamber design and non-choke valves, the Viking Power 32, can be used to pump un-macerated sewage to a holding tank or transfer it onwards to a septic tank. • Maximum flow 32 Lt/min • Designed to empty waste water and bilges • Easy to install, even in tight spaces • Quiet operation • Easy and low-cost maintenance • High impact glass fiber reinforced nylon body • Ball-bearing supported transmission • Non-choke valves - no filters required • Self-priming up to 2,7m (8.2ft) • Can run dry and can pump air/water mixture • Robust (single) diaphragm

Cod.	Johnson SPX Code	V	Dim mm	Lt/min	ø Ports mm	UM	€
1826036	10-13373-03	12	277 x 264 x H192	32	38 (1" 1/2)	PCS	
1826038	10-13373-04	24	277 x 264 x H192	32	38 (1" 1/2)	PCS	

**Johnson Viking Vacuum Waste Pump**

SPX Johnson Viking Vacuum self-priming diaphragm pump endowed with double non-return valves, no need for filters. Used also to transfer grey or even non-macerated waste waters from holding tank to dock station or to the sea. It can be cranked by hand in case of emergency. Easy to install anywhere, thanks to the 360° rotatable pump head it can be set up in different pump/motor configurations. Designed with a ball bearing supported transmission for long life. Not only can it run dry, but it can also handle a mixture of air and water without difficulty. Although powered by an electric motor, this pump can also be operated by hand in an emergency. • Maximum flow 32 Lt/min • Designed to empty waste water and bilges • Easy to install, even in tight spaces • Quiet operation • Easy and low-cost maintenance • Self-priming up to 2,5m (8.2ft) • High impact glass fiber reinforced nylon body • Can run dry and can pump air/water mixture • Robust (single) diaphragm

Cod.	Johnson SPX Code	Lt/min	ø Ports mm	Dim mm	V	UM	€
1309300	10-13373-07	24	38 (1" 1/2)	340 x 271 x H192	12	PCS	
1309302	10-13373-08	24	38 (1" 1/2)	340 x 271 x H192	24	PCS	

**Johnson Flush 3.5 Charging Pump**

Johnson self-priming automatic flushing water charging pump to be used with on-off switch for any marine 12V/24V toilet with external flushing pump system. Fits with all Silent Electric models. Delivers 13 l/min/3.5 GPM.

Cod.	Johnson's Code	Lt/min	ø Ports mm	Dim mm	V	UM	€
1309308	10-13399-05	13	16 (3/8")	200 x 197 x H114	12	PCS	
1309309	10-13399-06	13	16 (3/8")	200 x 197 x H114	24	PCS	

**Ocean Flush Charging Pump**

Ocean silent self-priming automatic flushing water charging pump, equipped with 4 diaphragms, for Silent type toilets with external flushing pump system.

Cod.	Lt/min	ø Ports mm	Dim mm	V	UM	€
1309332	12	19 (3/4")	174 x 130 x H98	12	PCS	
1309334	12	19 (3/4")	174 x 130 x H98	24	PCS	



Plastic Check Valve

Nylon check valve. Flange dimensions 50 x 45 mm, total length 115 mm.

Cod.	For Hose ø mm	UM	€
1423322	25-38 (1-1 1/2)	PZ	

**Johnson Check Valve**

Johnson Plastic check valve. It maintains priming in suction lines. In line mount, maintenance and cleaning without using any tools.

Cod.	For Hose ø mm	UM	€
1426050	25/38 (1" 1/2)	PZ	
1426051	19/32 (3/4" 1/4)	PZ	

**Vented Loop**

Vented loop for toilet mounting below the waterline.

Cod.	For Hose ø mm	UM	€
1320034	19 (3/4")	PZ	
1320110	25 (1")	PZ	
1320115	38 (1 1/2")	PZ	

**Johnson Vented Loop**

The vented loop is available in 3 different sizes. With its inverted U-shape with a vent at the top it allows the air to escape. Vented loops are to prevent back siphoning and are found in toilet discharge lines or in systems which are mounted below the waterline.

Cod.	For Hose ø mm	UM	€
1320105	19 (3/4")	PZ	
1320106	25 (1")	PZ	
1320107	38 (1" 1/2)	PZ	

SPXFLOW
Johnson Pump**"J" Type Drain Valve**

3-Way diverter valve with remote cable control option. Allows pumping toilet waste over board or into waste tank.

Cod.	Out ø mm	In ø mm	UM	€
1320035	2 x 38	1 x 38/25	PZ	

Ocean
Valves**"Y" Type Drain Valve**

3-way diverter valve with remote cable control option. Allows pumping toilet waste over board or into waste tank.

Cod.	Out ø mm	In ø mm	UM	€
1320033	2 x 38	1 x 38	PZ	

Ocean
Valves**Aquavalue 3 Way Diverter Valve**

Aquavalue 3 way diverter valve manufactured in Fiber-glass charged Nylon for marine or industrial applications. Pressure test at 300 PSI. Every valve is tested singularly.

Cod.	Ref	UM	€
1423328	Valve 3 x 1" 1/2	PZ	
1441021	ø 19 mm Pipe-to-Hose	PZ	
1441022	ø 25 mm Pipe-to-Hose	PZ	
1441023	ø 32 mm Pipe-to-Hose	PZ	
1441024	ø 38 mm Pipe-to-Hose	PZ	



TRAUDESIGN

Sewage Container Connectors Kit 38

Waste tanks Plastic connections kit made of:

1 x 16 mm pipe-to-hose connector with 3/8" angled fitting

2 x 1" 1/2 threaded angled adaptable 38/50/60 mm pipe-to hose connectors

2 x 38 mm straight pipe-to-hose connectors

1 x female 1" 1/2 threaded cap

1 x male 1" 1/4 threaded cap

Cod.	UM	€
1322523	PCK	



CANISB

**Sewage Container Connectors Kit 50**

Waste tanks Plastic connections kit made of:

1 x 16 mm pipe-to-hose connector with 3/8" angled fitting

2 x 1" 1/2 threaded angled adaptable 38/50/60 mm pipe-to hose connectors

1 x female 1" 1/2 threaded cap

1 x male 1" 1/4 threaded cap

Cod.	UM	€
1322522	PCK	



CANISB

**Waste Water Level Indicator**

Waste water level indicator at three points (empty-half-full).

Cod.	Dial	Recess ø mm	UM	€
1322142	BLACK	52	PCS	
1322144	WHITE	52	PCS	


CANISB

**Waste Water Level Sensor**

Level sensor for heavy use of waste water. It adapts to any tank up to a maximum height of 60 cm by adjusting the wires length. The signal is transmitted at three points (empty-half-full). Universal 12/24V power supply, complete with 10-180 or 240-33 Ohm impedance switching key.

Cod.	Thread	UM	€
1322140	1" 1/4	PCS	

CANISB

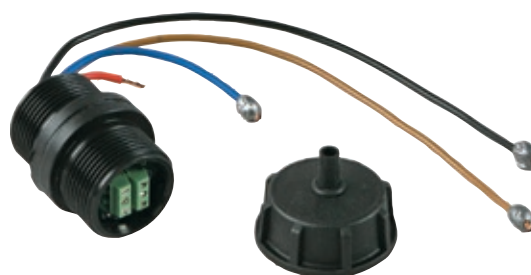**Waste Water Level Indicator and Panel**

12/24V waste water level indicator. Universal VDO 5 holes flange with H13 cm probe.

Cod.	UM	€
1322120	PCS	


**Inline WC Filter Vent**

Active carbon toilet filter vent for waste tanks. Traps and filters smelly odors.

Cod.	Fittings ø mm	L mm	UM	€
1321302	16/19	200	PCS	
1321303	20/25	200	PCS	



Cod. 1321302

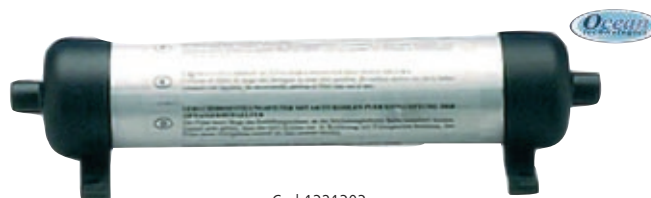

Cod 1321303

CANISB


Ocean

**Ocean Sewage Container**

Polyethylene rectangular or shaped sewage and waste tanks. Complete with inspection hatch with cap and dead female threaded ports for 4 x 1/2" and 4 x 1" 1/4 fittings.



Cod.	Lt	L mm	W mm	H mm	UM	€
1322650	47	550	430	290	PCS	
1322675	75	800	430	290	PCS	

**Ocean System Sewage Container**

Sewage and waste tanks complete with discharging system with macerator pump, Y valve, anti-odor filter and gauge panel with probe.



Cod.	Lt	V	L mm	W mm	H mm	UM	€
1322655	45	12	550	430	290	PCS	
1322658	75	12	800	430	290	PCS	
1322661	98	12	1050	430	290	PCS	
1322685	45	24	550	430	290	PCS	
1322686	75	24	800	430	290	PCS	
1322687	98	24	1050	430	290	PCS	

**Ocean ISO8099 Sewage Container**

Polyethylene Sewage/waste water tank compliant with ISO8099 standard. Complete with 10-hole inspection hatch with 3 1" 1/2 threaded connections, one 1/2" threaded connection, dip tube, plug and two 38 mm swivel connections with 1" 1/2 ring nut. Compatible for sensor assembly VDO type level with 5 holes and drain pump with hole spacing 60 x 85 mm.



Cod.	Lt	Dim mm	UM	€
1322625	53	550 x 400 x H300	PCS	
1322626	73	750 x 400 x H300	PCS	



New

**Ocean System ISO8099 Sewage Container**

Polyethylene sewage/waste tank according to ISO8099 standard with macerator pump for emptying. Complete with 10-hole inspection hatch with three 1" 1/2 threaded connections, one 1/2" threaded connection, dip tube, cap, two 38 mm swivel connections with 1" 1/2 ring nut, 20 mm hose connector 1/2" threaded, 1" threaded vent with 16/18 mm hose connection, activated carbon filter with 16/19/25 mm connections, three-point VDO type level sensor almost full/full with 5 holes and LED level control panel with 2.4 m cable. Pump height above tank 100 mm.



New

Cod.	Lt	V	Dim mm	UM	€
1322635	73	12	750 x 400 x H300	PCS	
1322641	73	24	750 x 400 x H300	PCS	
1322642	103	24	1050 x 400 x H300	PCS	





New Line Sewage Containers

High-density Polyethylene sewage/waste tanks complete with 10-hole hatch with dip-tube, 2 swiveling 38 mm elbow pipe-to-hose connectors, 2 straight 38 mm pipe-to-hose connectors, 16 mm Stainless Steel pipe-to-hose connector, a 1" 1/4 cap and a 1" 1/2 cap.



Cod.	Ref	Lt	L mm	W mm	H mm	UM	€
1322535	Flat	35	550	390	200	PCS	
1322548	Flat	48	750	390	200	PCS	
1322561	Flat	61	950	390	200	PCS	
1322553	Standard	53	550	390	290	PCS	
1322573	Standard	73	750	390	290	PCS	
1322593	Standard	93	950	390	290	PCS	



Jabsco System Sewage Container

High-density Polyethylene sewage/waste tanks with discharging system. Complete with 12V self-priming Jabsco pump with 38 mm fitting, 10-hole hatch, 38 mm swiveling pipe-to-hose connector, 16 mm Stainless Steel pipe-to-hose connector, 240-33 Ohm tubular level sender, anti-odor filter with vent loop and exhaust syphon.



Cod.	Ref	Lt	L mm	W mm	H mm	UM	€
1322601	Flat	35	550	390	200	PCS	
1322603	Flat	48	750	390	200	PCS	
1322606	Flat	61	950	390	200	PCS	
1322604	Standard	53	550	390	290	PCS	
1322609	Standard	73	750	390	290	PCS	
1322611	Standard	93	950	390	290	PCS	



- PORTA POTTI PORTABLE HEADS -

Porta Potty SeaFlo Chemical Toilet

Compact and resistant portable Porta Potty toilet, ideal for small boats and for any nautical activity where there are no toilets. Complete with ergonomic and comfortable seat, whirl spray rinse system, odorless sealed holding tank with level indicator, lid with handle and swiveling waste fitting.



Cod.	Dim mm	AWater Tank Lt	Waste Tank Lt	UM	€
1325030	346 x 389 x H337	10	12	PCS	



Porta Potty Qube 365 Chemical Toilet

A large size portable toilet with bigger waste tank and natural height seat. Floor hold down kit is sold separately as optional.




Cod.	Dim mm	Water Tank Lt	Waste Tank Lt	Accessories	UM	€
1325036	414 x 383 x H427	14	21		PCS	
1325050				Hold Down Kit	PCS	



TAPS AND SHOWER HEADS

Uno Folding Tap
Swiveling and foldable spout tap. 3/8 threaded connection.

Cod.	H mm	Base mm	UM	€
1510004	180	96	PCS	

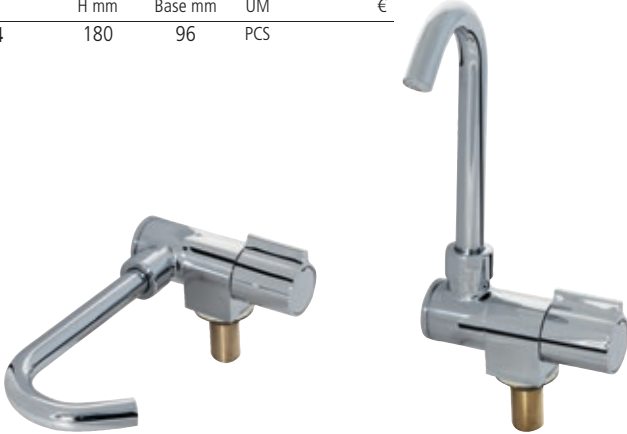

TAPS / FAUCETS

Uno Classic Tap
Swiveling and foldable spout tap with 3/8" connection.

Cod.	Ref	H mm	UM	€
1510000	L	210	PCS	
1510001	R	210	PCS	



Uno Folding High Tap
Swiveling and foldable spout tap. 3/8 threaded connection.

Cod.	H mm	Base mm	UM	€
1510007	180	96	PCS	




Classic Basin Faucet
Compact faucet with reduced dimensions ideal for tight spaces.

Cod.	L mm	UM	€
1510010	140	PCS	




2Extreme Mixer Faucet
Mixer faucet with swiveling and foldable spout.

Cod.	H mm	Base mm	UM	€
1510012	180	158	PCS	

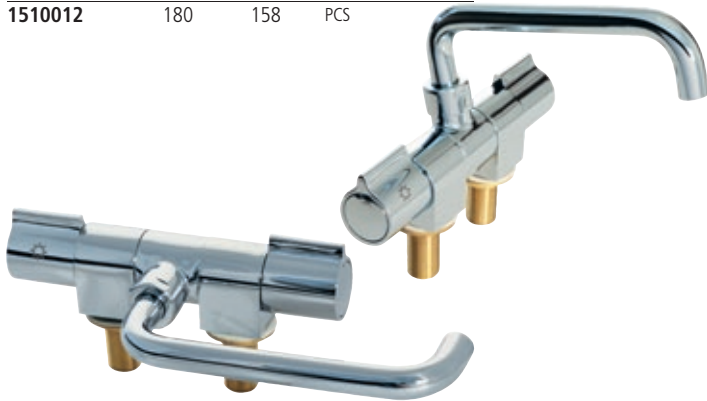

Classic Duo Mixer Faucet
Mixer faucet with swiveling spout.


Cod.	H mm	L mm	UM	€
1510002	240	160	PCS	

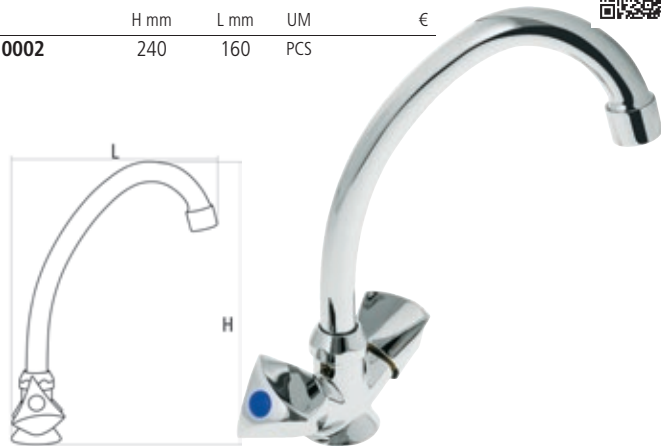

- MIXER FAUCETS -


Low Folding Mixer Faucet
Swiveling and foldable spout mixer faucet for sinks.

Cod.	H mm	Base mm	UM	€
1510011	180	120	PCS	

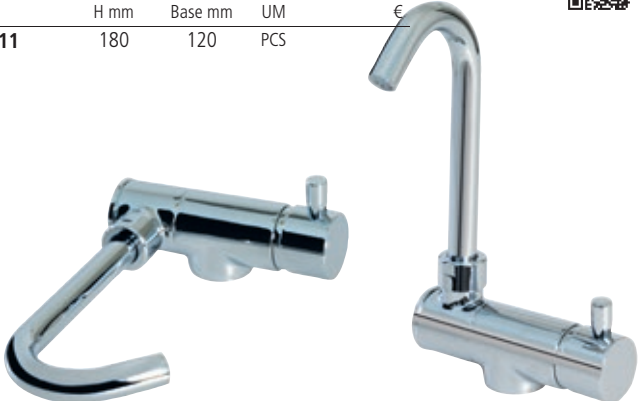

Classic Lever Mixer Faucet
Swiveling spout sink mixer faucet.

Cod.	H mm	L mm	UM	€
1511008	311	190	PCS	

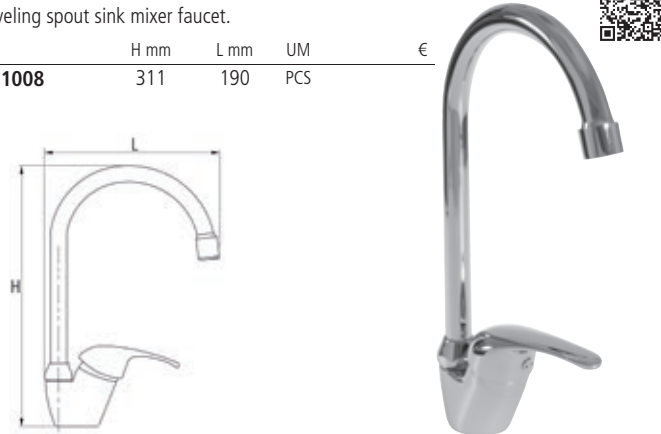

TAPS AND SHOWER HEADS

Stainless Steel Folding Mixer Faucet

Stainless Steel swiveling and foldable spout mixer faucet for sinks.

Cod.	H mm	Base mm	UM	€
1511005	350	120	PCS	



Classic Short Mixer Faucet

Swiveling spout sink compact mixer faucet.

Cod.	H mm	L mm	UM	€
1511000	106	185	PCS	



Shower Mixer Faucet

Sink mixer faucet with extractable shower head. 1.6 m flexible hose.

Cod.	Ref	H mm	L mm	UM	€
1513055	Shower Mixer	170	250	PCS	
1513115	Spare Shower			PCS	



Elka Shut Off Marine Mixer Faucet

Swiveling spout sink mixer faucet with pullout shut-off shower head. 1.6 m flexible hose.

Cod.	Ref	H mm	L mm	UM	€
1513020	Shower Mixer	260	140	PCS	
1513109	Spare Shower			PCS	




MIXER FAUCETS

Yacht Line Mixer Faucet

Elegant and refined design swiveling spout sink mixer faucet.

Cod.	H mm	L mm	UM	€
1511006	310	210	PCS	

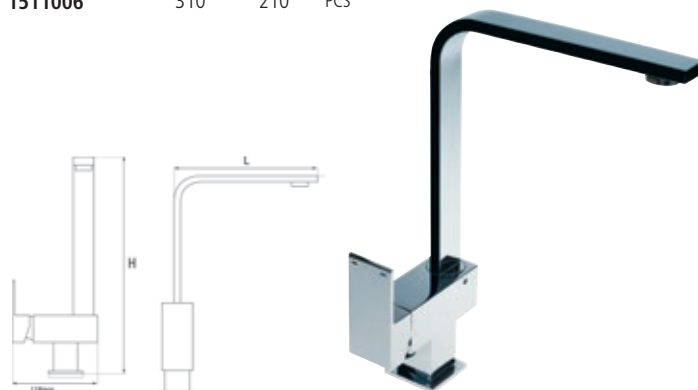

Classic Long Mixer Faucet

Swiveling spout sink mixer faucet.

Cod.	H mm	L mm	UM	€
1511001	155	250	PCS	



Elka Shut Off Standard Mixer Faucet

Swiveling spout sink mixer faucet with pullout shut-off shower head. Complete with 1.6m flexible hose and all fittings required.

Cod.	Ref	H mm	L mm	UM	€
1513022	Shower Mixer	141	180	PCS	
1513109	Spare Shower			PCS	



Elka Line Single Lever Mixer L

Swiveling spout sink mixer faucet.

Cod.	H mm	L mm	UM	€
1511012	147	224	PCS	



Elka Line Single Lever Mixer S

Bidet and sinks mixer faucet.

Cod.	H mm	L mm	UM	€
1511020	136	168	PCS	

**Uno Piano Shower Mixer Faucet**


Lever mixer with shower head flexible hose connection. To be completed with hose and shower.

Cod.	H mm	L mm	UM	€
1511105	109	115	PCS	

**Uno Piano Mixer Faucet**

Lever mixer for showers and faucets. 3/8 male threaded connections.

Cod.	H mm	UM	€
1511103	74	PCS	

**Uno Wand Mixer Faucet**

Wall mount water mixer for shower heads.

Cod.	H mm	UM	€
1511104	32	PCS	

**Water Mixer Box**

Water mixer recessed box. UV resistant sturdy shockproof Plastic body. Vertical or horizontal mount. To be completed with 1511112 mixer. Recessed hole 70 mm - Outside diameter 98 mm - Depth 66 mm.

Cod.	Ref	Accessories	UM	€
1511111	White Plastic Box		PCS	
1511110	Chromed Plastic Box		PCS	
1511112		T Mixer	PCS	



CARISA

**Hot/Cold Water T-Mixer**

Hot/cold mixer set with 3/8" flexible connections.

Cod.	L mm	Thread ø	UM	€
1511112	80	M32	PCS	



Shower Head PVC Flexibles

PVC flexible hoses for shower heads.

Cod.	Ref	L m	Connection	UM	€
1513220	White PVC	2	1/2" F - 1/2" F	PCS	
1513225	White PVC	2.5	1/2" F - 1/2" F	PCS	
1513240	White PVC	4	1/2" F - 1/2" F	PCS	
1513226	White PVC	2.5	3/8" F - 1/2" F	PCS	
1513241	White PVC	4	3/8" F - 1/2" F	PCS	

**Shower Head Stainless Steel Flexibles**

Stainless Steel flexible hoses for shower heads.

Cod.	Ref	L m	Connection	UM	€
1513227	Stainless Steel	2.2	1/2" F - 1/2" F	PCS	
1513242	Stainless Steel	3.2	1/2" F - 1/2" F	PCS	

**Bath Shower Head Flexibles**

Bath shower flexible.

Cod.	Ref	L m	Connection	UM	€
1513415	White PVC	1.5	F 3/8" - M M15	PCS	
1513418	White PVC	2	F 3/8" - M M15	PCS	
1513615	Chromed	1.5	F 1/2" - M M15	PCS	
1513622	Chromed	2.5	F 1/2" - M M15	PCS	

**Shower Extensible Hose from 1 to 3****Meters**

Shower heads flexible hose in TPU extensible from 1 to 3 meters.

1/2" Chromed Brass end fittings.

Cod.	L m	UM	€
1513293	3.1	PCS	

**New****Curved Shower Head Terminal M1/2" - F1/2"**

Shower heads Chromed Brass 30° curved terminal. Thread: male 1/2" - female 1/2".

Cod.

UM

1513183

PCS

**Chrome Shower Mount**

Chromed ABS shower base for shower heads.



Cod.	ø mm	UM	€
1513184	19	PCS	

**Shower Wall Mount Fix**

Wall mount fixed shower head base.



Cod.

UM

1513180

PCS

**Shower Wall Mount Adjustable**

Wall mount adjustable shower head base.



Cod.

UM

1513182

PCS



TAPS AND SHOWER HEADS

SHOWER HEADS

Alba ABS Hand Sprayer

Shock-proof white ABS Alba hand sprayer, with anthracite colored ring and lever. Open/close and continuous spray control lever. 1/2" connection.



Cod.	UM	€
1513100	PCS	



Alien ABS Hand Sprayer

Multipurpose ABS Alien hand sprayer. Extremely handy and robust. Open/close and continuous spray control lever. 1/2" connection.



Cod.	UM	€
1513104	PCS	

New



White ABS Jara Hand Sprayer

Shock-proof white ABS Jara hand sprayer with chromed lever and spray. Open/close and continuous spray control lever. 1/2" connection.



Cod.	UM	€
1513101	PCS	

New



Chromed ABS Jara Hand Sprayer

Shock-proof chromed ABS Jara hand sprayer. Open/close and continuous spray control lever. 1/2" connection.



Cod.	UM	€
1513109	PCS	



Hold ABS Hand Sprayer

ABS Hold hand sprayer with hold ring. Open/close and continuous spray control lever. 1/2" connection.



Cod.	UM	€
1513107	PCS	

New



Pippo ABS Hand Sprayer

Handy multipurpose ABS Pippo shower head. Open/close button integrated into the handle. 1/2" connection.



Cod.	UM	€
1513210	PCS	

New



Duo Standard Shut-Off Hand Sprayer

2 spray shockproof ABS shut-off hand sprayer. Open/close and continuous spray control lever.



Cod.	Connection	UM	€
1513103	1/2" M	PCS	



Sprayer Mixer Shower Head

Chromed ABS Sprayer Mixer shower head for mixer. 1/2" connection.



Cod.	UM	€
1513115	PCS	



Knob Lisa Shut-Off Hand Sprayer

Chromed Brass and ABS shut-off Knob Lisa hand sprayer. With hold ring and open/close control knob. 1/2" connection.

Cod.	UM	€
1513105	PCS	



Knob Mona Shut-Off Hand Sprayer

Chromed Brass and ABS shut-off Knob Mona hand sprayer. With hold ring and open/close control knob. 1/2" connection.


Cod.	UM	€
1513106	PCS	



Ivana Chromed Brass Hand Sprayer

High quality Chromed Brass Ivana hand sprayer. Open/close control lever. 1/2" connection.

Cod.	UM	€
1513110	PCS	

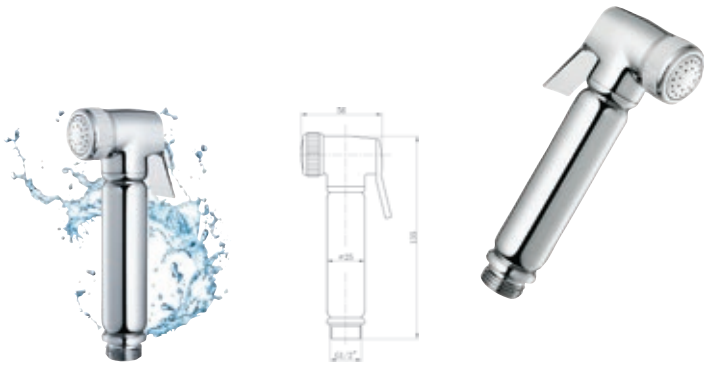

Stainless Steel Push Button Hand Sprayer

Elegant and sturdy Stainless Steel Push Button hand sprayer. Open/close spray control button. 1/2" connection.

Cod.	UM	€
1513119	PCS	



Mira Chromed Brass Hand Sprayer

High quality Chromed Brass Mira hand sprayer. Open/close control lever. 1/2" connection.

Cod.	UM	€
1513113	PCS	



Zebra Chrome Shut-Off Hand Sprayer

High quality Chromed Brass shut-off Zebra Chrome hand sprayer. Open/close and continuous spray control lever. 1/2" connection.

Cod.	UM	€
1513111	PCS	



Shower Kit Marin

Shower kit with ABS shower head, flexible hose and mount.

Cod.	UM	€
1513116	PCS	



Chromelux Shower Kit

Shower kit with shower head (1513109), flexible chromed hose (1.5 meters) and mount.

Cod.	UM	€
1513150	PCS	



Vertical Shower Box

Recessed shower head box/container made of UV resistant sturdy shockproof Plastic. Vertical mounting. To be completed with shower head and flexible. Recess hole ø 70 mm - Outer ø 97 mm - Depth 65 mm.



Cod.	Ref	Accessories	UM	€
1513603	White Plastic Box		PCS	
1513613	Chromed Plastic Box		PCS	
1513106		Knob Mona A Shower	PCS	
1513105		Knob Lisa B Shower	PCS	
1513225		2.5 m White PVC Shower Flexible	PCS	
1513240		4.0 m White PVC Shower Flexible	PCS	
1513227		2.2 m Stainless Steel Shower Flexible	PCS	
1513242		3.2 m Stainless Steel Shower Flexible	PCS	




SM Oval Shower Mixer Box

Recessed shower head and hot/cold water mixer oval box/container made of UV resistant sturdy shockproof Plastic. Universal vertical or horizontal mounting. Recess hole 70 x 115 mm - Outer 98 x 143 mm - Depth 73 mm. To be completed with T Mixer, shower head and flexible.



Cod.	Ref	Accessories	UM	€
1513610	SM Oval Box		PCS	
1511112		T Mixer	PCS	
1513105		Lisa ABS Shower Head	PCS	
1513110		Ivana Chromed Brass Shower Head	PCS	
1513226		2.5 m White PVC Shower Flexible	PCS	
1513241		4.0 m White PVC Shower Flexible	PCS	
1513227		2.2 m Stainless Steel Shower Flexible	PCS	
1513242		3.2 m Stainless Steel Shower Flexible	PCS	

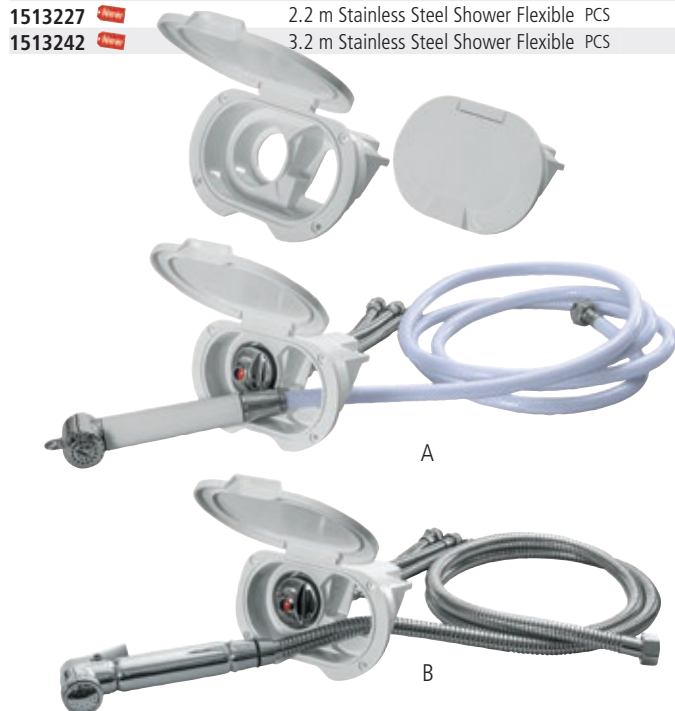

Uni-R Shower Box

Recessed shower head round box/container made of UV resistant sturdy shockproof Plastic. Vertical or horizontal mounting. To be completed with shower head and flexible. Recess hole ø 70 mm - Outer ø 98 mm - Depth 71 mm.



Cod.	Ref	Accessories	UM	€
1513602	White Plastic Box		PCS	
1513612	Chromed Plastic Box		PCS	
1513100		Alba Shower A	PCS	
1513105		Lisa Shower B	PCS	
1513225		2.5 m White PVC Shower Flexible	PCS	
1513240		4.0 m White PVC Shower Flexible	PCS	
1513227		2.2 m Stainless Steel Shower Flexible	PCS	
1513242		3.2 m Stainless Steel Shower Flexible	PCS	



Attwood Shower Kit

Flush mount shower kit with cool and warm water mixers and 185 cm flexible hose. Antishock Plastic UV ray resistant cover and casing. Vertical or horizontal flush mount.






Cod.	Dim mm	Recess mm	UM	€
1513652	241 x 127	57	PCS	



Lisa Shower Kit

Lisa shower kit - Vertical-Box




Composed of Lisa shower head and vertical recess mount White or Chromed Abs Box.
To be completed with a PVC or Stainless Steel shower hose of your choice.

Cod.	Colour	Accessories	UM	€
1513805	WHITE		PCS	
1513905 	CHROMED		PCS	
1513225		2.5 m White PVC Shower Flexible	PCS	
1513227 		2.2 m Stainless Steel Shower Flexible	PCS	
1513240		4.0 m White PVC Shower Flexible	PCS	
1513242 		3.2 m Stainless Steel Shower Flexible	PCS	

**Mona Shower Kit**

Mona shower kit - Vertical-Box





Composed of Mona shower head and vertical recess mount White or Chromed Abs Box.
To be completed with a PVC or Stainless Steel shower hose of your choice.

Cod.	Colour	Accessories	UM	€
1513806	WHITE		PCS	
1513906 	CHROMED		PCS	
1513225		2.5 m White PVC Shower Flexible	PCS	
1513227 		2.2 m Stainless Steel Shower Flexible	PCS	
1513240		4.0 m White PVC Shower Flexible	PCS	
1513242 		3.2 m Stainless Steel Shower Flexible	PCS	

**Mira Shower Kit**

Mira shower kit - Vertical-Box

Composed of Mira shower head and vertical recess mount White or Chromed Abs Box.
To be completed with a PVC or Stainless Steel shower hose of your choice.

Cod.	Colour	Accessories	UM	€
1513813 	WHITE		PCS	
1513913 	CHROMED		PCS	
1513225		2.5 m White PVC Shower Flexible	PCS	
1513227 		2.2 m Stainless Steel Shower Flexible	PCS	
1513240		4.0 m White PVC Shower Flexible	PCS	
1513242 		3.2 m Stainless Steel Shower Flexible	PCS	



Jara White Shower Kit

Jara White shower kit - Universal-Box

Composed of White ABS Jara shower head and White or Chromed Abs Box, for both vertical and horizontal recess mount.

To be completed with a PVC or Stainless Steel shower hose of your choice.

Cod.	Colour	Accessories	UM	€
1513801	WHITE		PCS	
1513901	CHROMED		PCS	
1513225		2.5 m White PVC Shower Flexible	PCS	
1513227		2.2 m Stainless Steel Shower Flexible	PCS	
1513240		4.0 m White PVC Shower Flexible	PCS	
1513242		3.2 m Stainless Steel Shower Flexible	PCS	

**Jara Chrome Shower Kit**

Jara Chrome shower kit - Universal-Box

Composed of Chromed ABS Jara shower head and White or Chromed Abs Box, for both vertical and horizontal recess mount.

To be completed with a PVC or Stainless Steel shower hose of your choice.

Cod.	Colour	Accessories	UM	€
1513809	WHITE		PCS	
1513909	CHROMED		PCS	
1513225		2.5 m White PVC Shower Flexible	PCS	
1513227		2.2 m Stainless Steel Shower Flexible	PCS	
1513240		4.0 m White PVC Shower Flexible	PCS	
1513242		3.2 m Stainless Steel Shower Flexible	PCS	

**Alien Shower Kit**

Alien shower kit - Universal-Box

Composed of Alien shower head and White or Chromed Abs Box, for both vertical and horizontal recess mount.

To be completed with a PVC or Stainless Steel shower hose of your choice.

Cod.	Colour	Accessories	UM	€
1513804	WHITE		PCS	
1513904	CHROMED		PCS	
1513225		2.5 m White PVC Shower Flexible	PCS	
1513227		2.2 m Stainless Steel Shower Flexible	PCS	
1513240		4.0 m White PVC Shower Flexible	PCS	
1513242		3.2 m Stainless Steel Shower Flexible	PCS	



Alba Shower Kit

Alba shower kit - Universal-Box
Composed of Alba shower head and White or Chromed Abs Box, for both vertical and horizontal recess mount.
To be completed with a PVC or Stainless Steel shower hose of your choice.


Cod.	Colour	Accessories	UM	€
1513800	WHITE		PCS	
1513900	CHROMED		PCS	
1513225		2.5 m White PVC Shower Flexible	PCS	
1513227		S/STEEL 2.2M SHOWER HOSE WITH 1/2" CONNECTIONS	PCS	
1513240		4.0 m White PVC Shower Flexible	PCS	
1513242		S/STEEL 3.2M SHOWER HOSE WITH 1/2" CONNECTIONS	PCS	



Ivana Shower Kit

Ivana shower kit - Universal-Box
Composed of Ivana shower head and White or Chromed Abs Box, for both vertical and horizontal recess mount.
To be completed with a PVC or Stainless Steel shower hose of your choice.

Cod.	Colour	Accessories	UM	€
1513810	WHITE		PCS	
1513910	CHROMED		PCS	
1513225		2.5 m White PVC Shower Flexible	PCS	
1513227		2.2 m Stainless Steel Shower Flexible	PCS	
1513240		4.0 m White PVC Shower Flexible	PCS	
1513242		3.2 m Stainless Steel Shower Flexible	PCS	

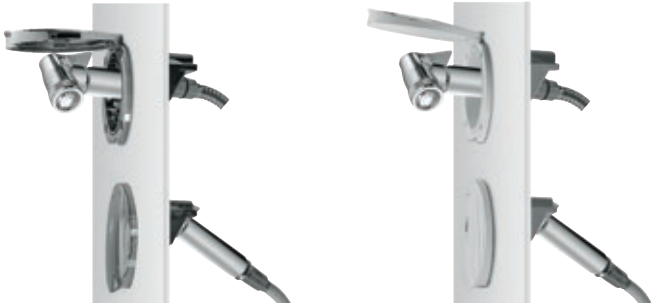

Push Button Shower Kit

Push Button shower kit - Universal-Box
Composed of Push Button shower head and White or Chromed Abs Box, for both vertical and horizontal recess mount.
To be completed with a PVC or Stainless Steel shower hose of your choice.

Cod.	Colour	Accessories	UM	€
1513819	WHITE		PCS	
1513919	CHROMED		PCS	
1513225		2.5 m White PVC Shower Flexible	PCS	
1513227		2.2 m Stainless Steel Shower Flexible	PCS	
1513242		4.0 m White PVC Shower Flexible	PCS	
1513240		3.2 m Stainless Steel Shower Flexible	PCS	



**Water Outlet Quick Coupling Box**

Recessed quick coupling outlet water box in shockproof white or chromed plastic. With 3 Bar 3/4" threaded pressure reducer to avoid pipes damaging when connecting boat water circuit to the dock water circuit.



Cod.	Ref	External ø mm	Recess Dim mm	UM	€
1450006	White Plastic	98	ø 68 x H70	PCS	
1450016	Chromed Plastic	98	ø 68 x H70	PCS	

**Water Inlet Quick Coupling Box**

Recessed quick coupling inlet water box in shockproof white or chromed plastic. With 3 Bar 3/4" threaded pressure reducer to avoid pipes damaging when connecting boat water circuit to the dock water circuit.



Cod.	Ref	External ø mm	Recess Dim mm	UM	€
1450005	White Plastic	98	ø 68 x H70	PCS	
1450015	Chromed Plastic	98	ø 68 x H70	PCS	

**Shower Flexible Quick Coupling**

Recessed round box/container with 3/8" quick coupling for shower flexible. Allows you to quickly attach and detach the shower head from the outlet.



Cod.	External ø mm	Recess Dim mm	UM	€
1450003	97	ø 70 x H40	PCS	

**Shower Flexibles Quick Connection**

Quick outlet connector that allows to quickly attach and detach the shower head. Endowed with water flow interruption system which activates when the shower head is detached.



Cod.	Thread	UM	€
1450004	3/8"	PCS	

**Jabsco Quick Release Deck Connector**

Jabsco quick release connector with water inlet. Allows to quickly connect and disconnect the washdown hose even under full pressure. Connections: under deck 1/2" thread, on deck 3/4" thread.



Cod.	External ø mm	Recess Dim mm	UM	€
1450008	73	ø 37 x H93	PCS	

**Deck Wash Quick Connect Fitting**

- Flush Mount
- Connects and disconnects under full pressure
- Double Viton O-ring seals
- Large flow capacity
- 1/2" F threaded 316 Stainless Steel bridge connection
- 3/4" M threaded Nylon 66 bayonet water hose connection

SPXFLOW
Johnson Pump

Cod.	External ø mm	Recess Dim mm	UM	€
1825950	70	ø 35 x H95	PCS	



SeaFlo Grey Water Drain System

SeaFlo grey water and shower drain system complete with automatic drain pump, removable mesh filter, snap lock cover and check valve on 3/4" (20 mm) drain outlet.



SEAFLO

Three aspiration inlets:

3/4" (20 mm)

3/4" - 1" (20-25 mm)

1 1/8" - 1 1/2" (30-38 mm).

Cod.	Ref	Dim mm	V	UM	€
1514007	750GPH - 47 Lt/min	334 x 215 x H112	12	PCS	
1514008	750GPH - 47 Lt/min	334 x 215 x H112	24	PCS	

**Attwood Grey Water Drain System**

Attwood grey water and shower drain system complete with automatic drain pump, watertight sealed cover, air vent and 3/4" (20 mm) drain outlet.



attwood


Three aspiration inlets:

3/4" (20 mm)

3/4" - 1" (20 - 25 mm)

1 1/8" - 1 1/2" (30 - 38 mm)

Cod.	Ref	Dim mm	V	UM	€
1514015	500GPH - 32 Lt/min	267 x 206 x H114	12	PCS	
1514017	750GPH - 47 Lt/min	330 x 190 x H114	12	PCS	
1514018	750GPH - 47 Lt/min	330 x 190 x H114	24	PCS	

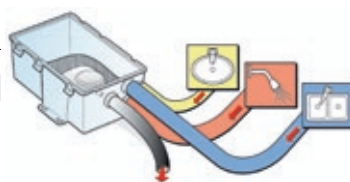**Rule Grey Water Drain System**

Rule shower drain system with automatic pump and float switch. 2.7 meters maximum lift, 1" threaded discharge port with non-return valve.



rule

Three 1" threaded suction ports, one of which with pipe-to-hose connector for possible 38 mm hoses. Complete with three 1" threaded fittings, with one 20 mm pipe-to-hose, one 25 mm and one 30 mm fitting.

Cod.	Ref	Dim mm	V	UM	€
1514002	800GPH - 50 Lt/min	240 x 230 x H130	12	PCS	
1514004	800GPH - 50 Lt/min	240 x 230 x H130	24	PCS	

**Johnson Grey Water Drain System**

Johnson grey water and shower drain system complete with automatic drain pump and watertight sealed cover.

3/4" (20 mm) drain outlet.

3 aspiration inlets:

3/4" (20 mm)

3/4" (20 mm) adjustable in 1" (25 mm)

1 1/8" (30 mm) adjustable in 1 1/2" (38 mm).


Cod.	Ref	Dim mm	V	UM	€
1514001	972GPH - 61 Lt/min	290 x 210 x H140	12	PCS	
1514003	972GPH - 61 Lt/min	290 x 210 x H140	24	PCS	

SPXFLOW
Johnson Pump**Johnson Grey Water Collector Tank**

Showers and sinks grey water collector tank. Complete with Johnson Ultima automatic water presence sensor. The tank is prepared for Johnson Viking Power 16 pump (cod.1826032/34) installation, but any 12V/24V up to 20A pump can be installed. Inlet ø 19/25/38 mm / Outlet 19/25 mm.

SPXFLOW
Johnson Pump

Cod.	Johnson SPX Code	Dim mm	V	UM	€
1514005	09-13384	350 x 280 x H180	12/24	PCS	




Fresh Water White Line Tanks

Fresh water White Line Polyethylene tanks complete with hatch, cap with vent, dip-tube and 2 pipe-to-hose connectors 3/8" x ø10/12/16/18 mm.



Cod.	Ref	Lt	H cm	W cm	L cm	UM	€
1530133	Flat	33	230	350	500	PCS	
1530143	Flat	43	230	350	650	PCS	
1530153	Flat	53	230	350	800	PCS	
1530172	Flat	70	300	410	650	PCS	
1530176	Flat	100	300	410	915	PCS	
1530142	Standard	42	300	350	500	PCS	
1530155	Standard	55	300	350	650	PCS	
1530170	Standard	70	300	350	800	PCS	
1530174	Standard	70	400	300	650	PCS	
1530178	Standard	100	400	300	915	PCS	

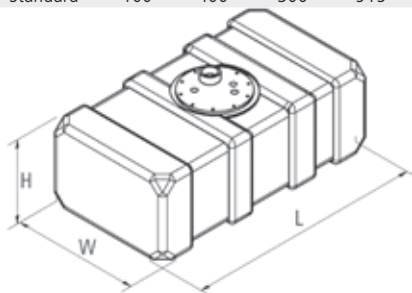


CANSA

Fresh Water Large Capacity Central Tanks

Fresh and grey water Polyethylene tanks with double hatch, dip-tube and 38 mm swivel pipe-to-hose connector.



Cod.	Lt	A mm	B mm	C mm	D mm	UM	€
1530110	190	1240	580	300	340	PCS	
1530111	430	1550	800	340	450	PCS	

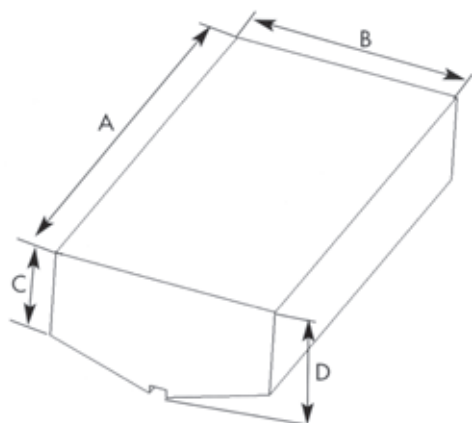


CANSA

Fresh Water Large Capacity Side Tanks

Fresh and grey water Polyethylene tanks with double hatch, dip-tube and 38 mm swivel pipe-to-hose connector.

Cod.	Ref	Lt	A mm	B mm	C mm	D mm	E mm	F mm	F1 mm	G mm	UM	€
1530112	R	160	1430	477	327	199	186	188	328	325	PCS	
1530114	L	143	1405	460	320	190	180	180	320	310	PCS	
1530113	L	280	2220	560	327	199	186	188	420	325	PCS	

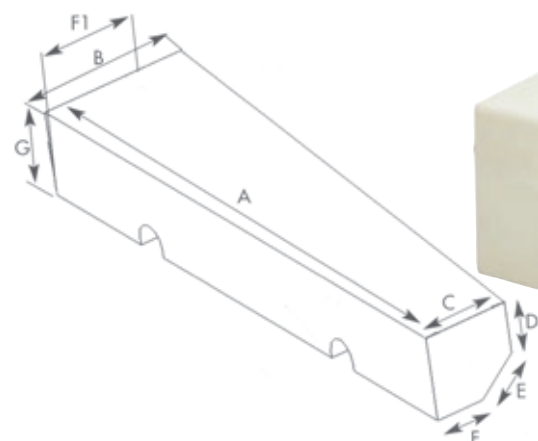

CANSA

SX


DX

Fresh Water Green Line Tanks

Fresh water Green Line Polyethylene tanks with inspection cap. With 10 prearranged holes for the installation of hatch and inlet/outlet fittings which are supplied separately.




Cod.	Ref	Lt	H cm	W cm	L cm	UM	€
1531132	Flat	32	20	39	45	PCS	
1531139	Flat	39	20	39	55	PCS	
1531145	Flat	45	20	39	65	PCS	
1531152	Flat	52	20	39	75	PCS	
1531160	Flat	60	20	39	85	PCS	
1531165	Flat	65	20	39	95	PCS	
1531171	Flat	71	20	39	105	PCS	
1531142	Standard	47	29	39	45	PCS	
1531157	Standard	57	29	39	55	PCS	
1531167	Standard	67	29	39	65	PCS	
1531177	Standard	77	29	39	75	PCS	
1531187	Standard	87	29	39	85	PCS	
1531197	Standard	97	29	39	95	PCS	
1531199	Standard	107	29	39	105	PCS	
1531600	Hatch					PCS	
1531601	Inlet Swiveling Hatch					PCS	

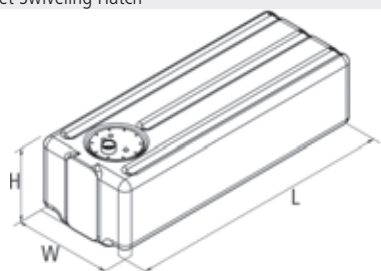**Fresh Water Green Line Tank Pump Kit**

Fresh water Green Line Polyethylene tanks with recessed automatic water pump slot. Complete with hatch, dip-tube, fittings and pump hose. To be completed with automatic water pump of your choice with base of 79 x 55 mm wheelbase.




Cod.	Ref	Lt	H cm	W cm	L cm	UM	€
1531239	Flat	39	20	39	55	PCS	
1531245	Flat	45	20	39	65	PCS	
1531252	Flat	52	20	39	75	PCS	
1531260	Flat	60	20	39	85	PCS	
1531265	Flat	65	20	39	95	PCS	
1531271	Flat	71	20	39	105	PCS	
1531257	Standard	57	29	39	55	PCS	
1531267	Standard	67	29	39	65	PCS	
1531277	Standard	77	29	39	75	PCS	
1531287	Standard	87	29	39	85	PCS	
1531297	Standard	97	29	39	95	PCS	
1531299	Standard	107	29	39	105	PCS	
1827112	Pump 12V					PCS	
1827124	Pump 24V					PCS	

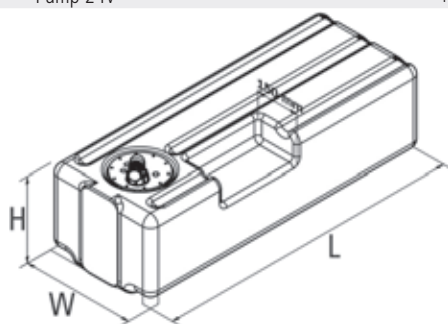**Brick Fresh Water Tanks**

Fresh water Polyethylene tanks with or without hatch. The version with hatch is complete with dip-tube, 38 mm swivel pipe-to-hose connector and two 3/8" pipe-to-hose connectors.



Cod.	Hatch	Lt	H cm	W cm	L cm	UM	€
1530102	No	38	240	355	490	PCS	
1530104	Yes	86	300	450	700	PCS	



Hatch

10 hole hatch for fresh water tanks. Complete with gasket, cap with vent, 10/12 mm pipe-to-hose connector and 18 mm L45 cm flexible dip-tube. Connections: 1" 1/2" male thread and 3 x 3/8" female threads.



Cod.	Outer ø mm	Wheelbase mm	Accessories	UM	€
1531600	173	156		PCS	
1531601			Inlet Swiveling Hatch 1" 1/2 x 38mm	PCS	

**Uni Inlet Coupling**

Inlet pipe-to-hose coupling for fresh water tanks. It can be mounted on the hatch in either a straight or angled position. Composed of two parts both threaded 1" 1/2 female complete with gasket.



Cod.	Thread	UM	€
1531602	1" 1/2 x 35/50/60 mm	PCS	

**Inlet and Outlet Fittings**

Inlet and outlet Nylon fittings for fresh water tanks. Complete with base and gasket for mounting on hole to be made on the tank.



Cod.	Ref	Thread	UM	€
1531810	Pipe to Hose	3/8" x 10/12 mm	PCS	
1531912	Angled Pipe to Hose	3/8" x 12 mm	PCS	
1531816	Pipe to Hose	3/8" x 16/18 mm	PCS	
1531212	Straight Pipe Fitting	1" 1/2 x 38 mm	PCS	
1531213	Angled Pipe Fitting	1" 1/2 x 38 mm	PCS	

**Outlet Fittings Poly**

Complete series of Polypropylene fittings for fresh water tanks drain. The outlet connection is complete with base and double EPDM gasket for mounting on hole to be made on the tank.



Cod.	Ref	Thread	UM	€
1531605	Water Outlet	1/2"	PCS	
1531603	Water Outlet	3/4"	PCS	
1423302	Valve	1/2"	PCS	
1423303	Valve	3/4"	PCS	
1531611	Pipe to Hose	1/2" x 12 mm	PCS	
1531612	Pipe to Hose	3/4" x 12 mm	PCS	

**Water Tank PP Quick Fitting**

Polypropylene quick coupling connector with food EPDM seal for any type of water tank. Quick assembly from the outside with a simple hole. When the fitting is screwed in, the seal compresses and guarantees a tight seal.



Cod.	G Thread (")	Tank Hole ø mm	UM	€
1440400	1/2	29	PCS	
1440401	3/4	35	PCS	
1440402	1	43	PCS	
1440403	1 1/4	52	PCS	
1440404	1 1/2	59	PCS	
1440405	2	70	PCS	

**Pump Fittings Kit**

Pump fittings kit for fresh water tanks. It allows to connect the fresh water pump and the water tank to the on-board system. It consists of a 1" 1/2 x 38 mm swivel angled fitting, two 3/8" x 10/12/16/18 mm straight fittings, a 3/8" x 13 mm angled fitting, gaskets, 12 mm spiral hose L40 cm with two clamps and 4 M5 screws for fixing the pump on the tank.



Cod.	UM	€
1599999	PCK	



ECMS Water / Fuel Level Senders

316 Stainless Steel water and fuel level senders. VDO Type 5 holes dia 54 mm flange. 12/24V Power supply. Average impedance 0 - 190 Ohm.

Cod.	L mm	UM	€
2362430	150	PCS	
2362431	200	PCS	
2362432	250	PCS	
2362433	300	PCS	
2362434	350	PCS	
2362435	400	PCS	
2362436	450	PCS	
2362437	500	PCS	
2362438	600	PCS	
2362439	700	PCS	
2362440	800	PCS	
2362441	900	PCS	
2362442	1000	PCS	

**ECMS Water Level Gauges**

Ecms 12/24V All Black gauges complete with cables and Molex connection. 316 Stainless Steel frame. IP67 watertight front panel with anti-fog curved lens. Customizable multi-color LED backlighting dial. The standard setup 0-190 Ohm of the Level Gauges can be easily changed to 240-33 Ohm with back button.

Cod.	Range	ø mm	Colour	UM	€
2361011	E-1/2-F	52	BLACK/CHROME	PCS	
2361014	E-1/2-F	52	BLACK/CHROME	PCS	
2361016	E-1/2-F	52	BLACK/BLACK	PCS	

**- FLEXIBLE WATER TANKS -****Fresh Water Flexible Rectangular Tanks**

Reinforced rubber fabric flexible rectangular tanks. Complete with hatch and swiveling fittings. Inlet fitting ø 40/50/60 mm. Outlet fitting ø 12 mm.

Cod.	Lt	W cm	L cm	UM	€
1522406	60	73	73	PCS	
1522407	75	73	80	PCS	
1522410	100	73	88	PCS	
1522412	120	73	103	PCS	
1522415	150	73	130	PCS	

**Fresh Water Flexible Triangular Tanks**

Reinforced rubber fabric flexible triangular tanks. Complete with hatch and swiveling fittings. Inlet fitting ø 40/50/60 mm. Outlet fitting ø 12 mm.

Cod.	Lt	W cm	L cm	UM	€
1523405	55	82	83	PCS	
1523410	100	100	100	PCS	

**Grey Water Flexible Tanks**

Rubber covered fabric grey water flexible tanks. Complete with 22.5 mm D threaded cap with non-return valve.

Cod.	Lt	W cm	L cm	UM	€
1521006	60	74	68	PCS	
1521009	90	74	95	PCS	



Pipe Water Filter

Stainless Steel strainer filter for sanitary water. It does not make the water drinkable, it just retains the impurities. Inlet/outlet pipe-to-hose ports.



Cod.	H mm	ø mm	Hose ø mm	UM	€
4132012	90	60	12,5 (1/2")	PCS	
4132013	90	60	19 (3/4")	PCS	

**File Water Filter**

Stainless Steel strainer filter for sanitary water. It does not make the water drinkable, it just retains the impurities. Inlet/outlet threaded ports.



Cod.	H mm	ø mm	Ports ø mm	UM	€
4132010	90	60	12,5 (1/2" Threaded)	PCS	

**Johnson Water Filters**

Johnson protection filters for boat sanitary water systems. They can be used as in-line filters or be mounted on water pumps with the KlickTite connectors.



Cod.	H mm	ø mm	Hose	Klick Fitting	UM	€
4132002	60	80	1 x Klick - 1 x 3/4"		PCS	
4132004	60	80	2 x Klick		PCS	
4132080				2 x 1/2" Hose - 3/8" BSP	PR	
4132081				2 x 3/4" Hose - 1/2" BSP	PR	
4132082				2 x 90° 3/4" Hose	PR	
4132083				2 x 90° 1/2" BSP	PR	
4132084				2 x 90° 1/2" Hose	PR	
4132085				2 x 90° 3/8" BSP	PR	
4132086				2 x Garden Hose Adapter	PR	
4132087				2 x 3/8" BSP	PR	
4132088				2 x 1/2" BSP	PR	
4132089				1 x T Fitting 3/4" Barb	PCS	

**- POLLUTION-FREE FILTERS -****WC Filter Vent**

Active carbon toilet filter vent for waste tanks. Traps and filters smelly odors.



Cod.	Fittings ø mm	Spare Parts	UM	€
1321304	19/25		PCS	
1321305		Active Carbon Cartridge	PCS	

**Vetus Anti Odor Waste Filter**

Anti-odor filter for waste tank ventilation. Filter grid is supplied in a 4 pcs package.



Cod.	H mm	ø mm	Ports ø mm	Spare Parts	UM	€
4132561	110	110	16 (5/8")		PCS	
4132565				Filter Grid	PCS	

**Vetus Anti Odor Tank Filter**

Anti-odor filter for fuel tank ventilation. Filter grid is supplied in a 4 pcs package.



Cod.	H mm	ø mm	Ports ø mm	Spare Parts	UM	€
4132562	110	110	16 (5/8")		PCS	
4132565				Filter Grid	PCS	



Seawater SeaStrainer

Polycarbonate body seawater strainer for pumps and engine cooling.
Adjustable outlet fittings with cut to the required diameter. Always discard the oversize part to avoid pressure that could damage the filter and cause water leaking.

Cod.	H mm	ø mm	Ports ø mm	UM	€
4132213	151	108	13-16-19 (1/2"-5/8"-3/4")	PCS	
4132226	191	148	25-30-38 (1"-1 1/4"-1 1/2")	PCS	



MTM

Seawater SeaFilter Strainer

Polycarbonate body seawater strainer for pumps and engine cooling.

Cod.	H mm	ø mm	Ports ø mm	UM	€
4132212	115	125	12,5 (1/2")	PCS	
4132216	115	125	16 (5/8")	PCS	
4132219	115	125	19 (3/4")	PCS	
4132225	165	165	25 (1")	PCS	
4132231	165	165	31 (1 1/4")	PCS	
4132238	165	165	38 (1 1/2")	PCS	



MTM

Vetus FTR140 Seawater Strainer

Polypropylene body seawater strainer for pumps and engine cooling.

Cod.	H mm	ø mm	Ports ø mm	UM	€
4132112	111	107	12,5 (1/2")	PCS	
4132116	111	107	16 (5/8")	PCS	
4132119	111	107	19 (3/4")	PCS	



vetus

Vetus FTR330 Seawater Strainer

Polypropylene body seawater strainer for pumps and engine cooling.

Cod.	H mm	ø mm	Ports ø mm	UM	€
4132125	162	148	25 (1")	PCS	
4132131	162	148	31 (1 1/4")	PCS	
4132138	162	148	38 (1 1/2")	PCS	



vetus

Vetus FTR1320 Seawater Strainer

Polypropylene body seawater Vetus FTR1320 strainer with adjustable Stainless Steel mounting brackets. For pumps and engine cooling.

Cod.	H mm	ø mm	Ports ø mm	Max Capacity Lt/min	UM	€
4132141	297	172	38 (1 1/2")	205	PCS	
4132142	297	172	50 (2")	365	PCS	
4132143	297	172	63 (2 1/2")	570	PCS	



vetus

RG-1160 Seawater Strainer

Brass and Stainless Steel R.I.Na. approved seawater strainer.

For small capacity pumps and engine cooling. The Nylon support bracket has to be purchased separately.



Cod.	H mm	ø mm	Ports ø	Spare Parts	UM	€
4131500	100	95	3/8"		PCS	
4131501	100	95	1/2"		PCS	
4131502	100	95	3/4"		PCS	
4131717				D49 x H75 Filter Grid	PCS	
4131700				O-Ring Glass	PCS	
4131702				Support Bracket	PCS	

**RG-1164 Seawater Strainer**

Nickel-Plated Bronze with Stainless Steel parts R.I.Na. approved seawater strainer.

For medium capacity pumps and engine cooling.



Cod.	H mm	ø mm	Ports ø	Spare	UM	€
4131640	140	150	3/4"		PCS	
4131641	140	150	1"		PCS	
4131642	200	180	1" 1/4		PCS	
4131643	200	180	1" 1/2		PCS	
4131740				4131640/41 Filter Grid D74 x H100	PCS	
4131742				4131642 Filter Grid D87 x H123	PCS	
4131743				4131643 Filter Grid D98 x H131	PCS	
4131710				4131640/41 Glass D114	PCS	
4131711				4131642 Glass D123	PCS	
4131712				4131643 Glass D135	PCS	
4131750				4131640/41 O-Ring D101	PCS	
4131752				4131642 O-Ring D111	PCS	
4131751				4131643 O-Ring D123	PCS	

**RGL-1162 Seawater Strainer**

Nickel-Plated Bronze with Stainless Steel parts R.I.Na. approved seawater strainer.

For large capacity pumps and engine cooling.



Cod.	H mm	ø mm	Ports ø	Spare	UM	€
4131618	151	169	1"		PCS	
4131619	176	184	1" 1/4		PCS	
4131620	193	202	1" 1/2		PCS	
4131718				4131618 Filter Grid D87 x H77	PCS	
4131719				4131619 Filter Grid D98 x H95	PCS	
4131720				4131620 Filter Grid D105 x H100	PCS	
4131710				4131618 Glass D114	PCS	
4131711				4131619 Glass D123	PCS	
4131712				4131620 Glass D135	PCS	
4131750				4131618 O-Ring D101	PCS	
4131752				4131619 O-Ring D111	PCS	
4131751				4131620 O-Ring D123	PCS	

**RGXL-1162 Seawater Strainer**

Nickel-Plated Bronze with Stainless Steel parts R.I.Na. approved seawater strainer.

For large capacity pumps and engine cooling.



Cod.	H mm	ø mm	Ports ø	Spare	UM	€
4131621	216	242	2"		PCS	
4131622	284	260	2" 1/2		PCS	
4131623	292	310	3"		PCS	
4131721				4131621 Filter Grid D124 x H108	PCS	
4131722				4131622 Filter Grid D124 x H175	PCS	
4131723				4131623 Filter Grid D165 x H151	PCS	
4131713				4131621/22 Glass D160	PCS	
4131714				4131623 Glass D196	PCS	
4131753				4131621/22 O-Ring D149	PCS	
4131754				4131623 O-Ring D184	PCS	



**Flush Deck Fill**

Stainless Steel flush deck fill with opening/closing key lever.



Cod.	Type	Pipe Size ø mm	Flange ø mm	UM	€
4043096	Fuel	38	75	PCS	
4043093	Fuel	50	80	PCS	
4043097	Water	38	75	PCS	
4043099	Waste	38	75	PCS	

**Flush T Deck Fills**

Stainless Steel flush deck fills with lever for opening and closing.



Cod.	Type	Pipe Size ø mm	Flange ø mm	UM	€
4043283	Fuel	50	75	PCS	
4043286	Fuel	38	75	PCS	
4043287	Water	38	75	PCS	
4043289	Waste	38	75	PCS	

**Lift-Up Deck Fill**

Stainless Steel flush-in opening deck fill.



Cod.	Type	Pipe Size ø mm	Flange ø mm	UM	€
4043193	Fuel	50	88	PCS	
4043196	Fuel	38	82	PCS	
4043197	Water	38	82	PCS	
4043199	Waste	38	82	PCS	

**Lift-Up Angled 45° Deck Fill**

Stainless Steel flush-in opening angled deck fill.



Cod.	Type	Pipe Size ø mm	Flange ø mm	UM	€
4043276	Fuel	38	82	PCS	
4043273	Fuel	50	88	PCS	
4043277	Water	38	82	PCS	
4043279	Waste	38	82	PCS	
4043278	Waste	50	88	PCS	

**Sail S/Steel Deck Fill**

Stainless Steel deck fills. They can be opened with winch handle.



Cod.	Type	Pipe Size ø mm	Flange ø mm	UM	€
4043170	Fuel	38	82	PCS	
4043172	Fuel	50	88	PCS	
4043173	Water	38	82	PCS	
4043174	Waste	38	82	PCS	

**Lift-Up Chromed Deck Fill**

Chromed Brass flush-in opening deck fills.



Cod.	Type	Pipe Size ø mm	Flange ø mm	UM	€
4043080	Fuel	38	90	PCS	
4043081	Fuel	50	90	PCS	
4043082	Water	38	90	PCS	
4043083	Water	50	90	PCS	

**Key-Lock Chromed Deck Fills**

Key lock Chromed Brass deck fills with lever for opening and closing. Watertight and waterproof closing.



Cod.	Type	Pipe Size ø mm	Flange ø mm	UM	€
4043085	Fuel	50	98	PCS	
4043086	Water	38	86	PCS	

**Secure-Lock Chromed Deck Fills**

Key lock Chromed Brass deck fills with lever for opening and closing. Watertight and waterproof closing.



Cod.	Type	Pipe Size ø mm	Flange ø mm	UM	€
4043020	Fuel	38	88	PCS	
4043021	Fuel	50	88	PCS	
4043022	Water	38	88	PCS	
4043023	Water	50	88	PCS	
4043026	Waste	38	88	PCS	



Professional Bronze Deck Fills

Professional Bronze deck fills with internal threaded neck.

Cod.	Flange ø mm	D recess ø mm	H mm	G Thread	€
4043201	106	69	45	2"	PCS
4043202	131	83	51	2" 1/2	PCS
4043203	174	114	57	3" 1/2	PCS

**Stainless Steel Cap Deck Fill**

Reinforced Plastic deck fills with Stainless Steel lid.

Cod.	Type	Pipe Size ø mm	Flange ø mm	UM	€
4043146	Fuel	38	88	PCS	
4043147	Fuel	50	88	PCS	
4043148	Water	38	88	PCS	

**- PLASTIC DECK FILLS -****Ufo PL Deck Fill**

White reinforced Plastic deck fills with ergonomic notched lid.

Cod.	Type	Pipe Size ø mm	Flange ø mm	UM	€
4043154	Fuel	38	88	PCS	
4043155	Fuel	50	88	PCS	
4043156	Water	38	88	PCS	

**Ufo PC Deck Fill**

Reinforced Plastic deck fills with ergonomic notched Chromed lid.

Cod.	Type	Pipe Size ø mm	Flange ø mm	UM	€
4043157	Fuel	38	88	PCS	
4043158	Fuel	50	88	PCS	
4043159	Water	38	88	PCS	

**Flo PL Deck Fill**

White reinforced Plastic deck fills with recessed opening lever.

Cod.	Type	Pipe Size ø mm	Flange ø mm	UM	€
4043160	Fuel	38	85	PCS	
4043162	Water	38	85	PCS	

**NR Close Deck Fill**

Watertight cap Plastic deck fills.

Cod.	Type	Pipe size ø mm	UM	€
4043140	Fuel	50	PCS	
4043142	Water	38	PCS	

**Sail PL Deck Fill**

Reinforced Nylon deck fills complete with adhesive labels. They can be opened with winch handle.

Cod.	Pipe Size ø mm	Flange ø mm	UM	€
4043185	50	85	PCS	
4043187	38	85	PCS	

**AA Multipurpose Deck Fill**

Reinforced Nylon multi purpose deck fills. Complete with colored Red-Black-Blue-Green opening levers and Diesel-Fuel-Gas-Petrol-Water-Waste labels.

Cod.	Pipe Size ø mm	Flange ø mm	UM	€
4043150	38	82	PCS	
4043152	50	85	PCS	



Round Drain Plug B

Round Plastic transom drain plugs.

Cod.	ø mm	Colour	UM	€
1425000	24,70	WHITE	PCS	
1425001	24,70	BLACK	PCS	

**Oval Drain Plug**

Oval Plastic transom drain plugs.

Cod.	ø mm	Colour	UM	€
1425004	26,30	WHITE	PCS	
1425005	26,30	BLACK	PCS	

**CB Oval Drain Plug**

Oval Chromed Brass body transom drain plug.

Cod.	Dim mm	UM	€
1425019	34 x 50 ø 24,7	PCS	

**S/Steel and Brass Drain Plugs**

Stainless Steel and Brass drain plugs.

Cod.	Flange ø mm	Thread ø	Ref	UM	€
1425124	50	1/2" NPT	BRASS	PCS	
1425125	50	1/2" NPT	S/STEEL	PCS	

**Flushed Drain Plug**

Brass flushed drain plug.

Cod.	Flange ø mm	Thread ø	UM	€
1425128	55	3/4"	PCS	

**Drain Valve**

Bushing and through-hull drain valve.

Cod.	ø mm	UM	€
1425095	25	PCS	

**Non-Return Drain Valve with Cap**

Non-return drain valve with cap.

Cod.	Ref	ø mm	UM	€
1425006	Non-Return Valve	35	PCS	
1425110	Cap	35	PCS	



Flip-Lock Drain Plug

Expanding Plastic and PVC drain plug.

Cod.	ø mm	Colour	UM	€
1425010	22,7	BLACK	PCS	
1425011	22,7	GREY	PCS	
1425090	25,0	BLACK - CE	PCS	
1425091	25,0	GREY - CE	PCS	

**Flip-Lock Adjustable Drain Plug**

Expanding Plastic, PVC and Rubber adjustable drain plug.

Cod.	ø mm	UM	€
1425012	22,7 >	PCS	

**CB Flip-Lock Adjustable Drain Plug**


Adjustable expanding Chromed Brass and Rubber drain plug.

Cod.	ø mm	UM	€
1425015	22	PCS	
1425016	25	PCS	
1425017	34	PCS	

**Flip-Lock Large Drain Plug**

Expanding Plastic and PVC big drain plug.

Cod.	ø mm	UM	€
1425013	35	PCS	
1425014	40	PCS	

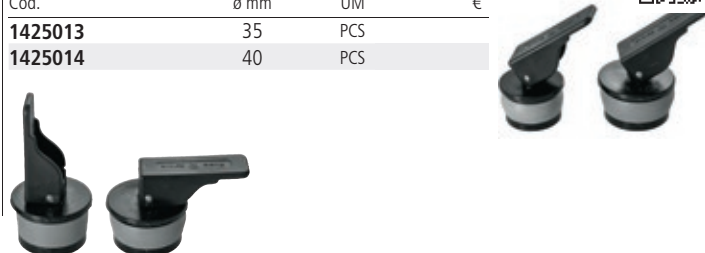**L Flip-Lock Drain Plug**

Expanding drain plug with lever.

Cod.	ø mm	Lever	UM	€
1425114	22,7 >	Brass	PCS	
1425115	22,7 >	Stainless Steel	PCS	

**Expanding T-Handle Drain Plug**


Expanding T handle drain plug.

Cod.	ø mm	Lever	UM	€
1425116	22,7 >	Brass	PCS	
1425117	22,7 >	Stainless Steel	PCS	

**Standard Threaded Transom Drains**

Standard threaded Plastic transom drains for expanding drain plugs: 1425010/11/12/90/91-1425114/15/16.

Cod.	ø mm	ø1 mm	H mm	Colour	UM	€
1425020	30	22.7	62	BLACK	PCS	
1425021	30	22.7	62	GREY	PCS	
1425022	30	22.7	62	WHITE	PCS	
1425070	33	25	62	BLACK - CE	PCS	
1425072	33	25	62	WHITE - CE	PCS	

**Long Threaded Transom Drains**

Long Plastic threaded transom drains for expanding drain plugs: 1425010/11/12/90/91-1425114/15/16.

Cod.	ø mm	ø1 mm	H mm	Colour	UM	€
1425024	30	22.7	155	BLACK	PCS	
1425025	30	22.7	155	GREY	PCS	
1425026	30	22.7	155	WHITE	PCS	
1425074	33	25	155	BLACK - CE	PCS	
1425076	33	25	155	WHITE - CE	PCS	

**Barbed Transom Drains**

Barbed transom drains for expanding drain plugs: 1425010/11/12/90/91-1425114/15/16.


Cod.	ø mm	ø1 mm	H mm	Colour	UM	€
1425030	30	22.7	100	BLACK	PCS	
1425032	30	22.7	100	WHITE	PCS	
1425031	30	22.7	100	GREY	PCS	
1425080	33	25	100	BLACK - CE	PCS	
1425082	33	25	100	WHITE - CE	PCS	



White Hose Barb Thru-Hull Connector


White Plastic hose barb thru-hull connector.

Cod.	ø mm	ø1 mm	H mm	H1 mm	UM	€
1420015	40	15	74	30	PCS	
1420018	50	18	84	30	PCS	
1420025	55	25	94	37	PCS	
1420030	70	30	94	40	PCS	
1420035	65	35	94	40	PCS	
1420040	75	38	104	36	PCS	

**Black Hose Barb Thru-Hull Connector**


Black Plastic hose barb thru-hull connector.

Cod.	ø mm	ø1 mm	H mm	H1 mm	UM	€
1421015	40	15	74	30	PCS	
1421018	50	18	84	30	PCS	
1421025	55	25	94	37	PCS	
1421035	65	35	94	40	PCS	
1421040	75	38	104	36	PCS	

**Stainless Steel Covered Hose Barb Thru-Hull Connector**


Plastic hose barb thru-hull connector with Stainless Steel cap.

Cod.	ø mm	ø1 mm	H mm	UM	€
1421416	48	16	86	PCS	
1421419	48	19	86	PCS	
1421425	48	25	86	PCS	
1421428	48	29	86	PCS	
1421438	60	38	102	PCS	
1421450	82	50	127	PCS	

**Big Hose Barb Thru-Hull Connector**


Very sturdy white Polypropylene big hose barb thru-hull connector. With optional easy-mount N/R Non-Return lid valve.

Cod.	ø mm	ø1 mm	ø2 mm	H mm	H1 mm	Accessories	UM	€
1425150	74	50	40	111	76		PCS	
1425261						N/R Valve	PCS	

**Big Threaded Thru-Hull Connector**


Very sturdy white Polypropylene all threaded big thru-hull connector. With optional easy-mount N/R non-return lid valve.

Cod.	ø mm	ø1 mm	ø2 mm	H mm	Accessories	UM	€
1425156	75	52	40	175		PCS	
1425261					N/R Valve	PCS	

**Big Telescopic Thru-Hull Connector**

White very sturdy Polypropylene telescopic thru-hull connector. With optional easy-mount N/R non-return lid valve.

Cod.	ø mm	ø1 mm	ø2 mm	H mm	Accessories	UM	€
1425440	75	50	45	80<>195		PCS	
1425261					N/R Valve	PCS	



Truedesign Thru-Hull with Hose-To-Pipe

Hose-to-pipe thru-hull fitting moulded from glass-reinforced Composite.
Resistant to chemical and galvanic corrosion, wear and pressure.



New


Cod.	G Thread (")	Pipe-to-Hose ø mm	UM	€
1421122	1/2	13	PCS	
1421123	3/4	19	PCS	
1421124	1	25	PCS	
1421125	1	28	PCS	
1421126	1 1/4	32	PCS	
1421127	1 1/2	38	PCS	
1421128	2	50	PCS	

**Stainless Steel Hose Barb Thru-Hull Connector**

Stainless Steel hose barb thru-hull connector.




Cod.	ø mm	ø1 mm	G Thread (")	H mm	UM	€
1439402	35	14	3/8	53	PZ	
1439403	39	18	1/2	60	PZ	
1439404	40	20	3/4	69	PZ	
1439405	50	26	1	71	PZ	
1439406	63	38	1 1/4	76	PZ	
1439407	70	44	1 1/2	79	PZ	
1439408	84	56	2	95	PZ	

**Chromed Brass Hose Barb Thru-Hull Connector**

Chromed Brass hose barb thru-hull connector.




Cod.	ø mm	ø1 mm	G Thread (")	UM	€
1411102	35	15	3/8	PZ	
1411103	40	18	1/2	PZ	
1411104	48	23	3/4	PZ	
1411105	55	30	1	PZ	
1411106	65	38	1 1/4	PZ	
1411107	70	44	1 1/2	PZ	
1411108	83	55	2	PZ	

**Chromed Brass Threaded Thru-Hull Connector with Cap**

Chromed Brass threaded thru-hull connector with shell-shaped protective cover.



Cod.	G Thread (")	L1 mm	UM	€
1410910	3/8	67	PZ	
1410911	1/2	75	PZ	
1410912	3/4	90	PZ	
1410913	1	85	PZ	
1410914	1 1/4	90	PZ	
1410915	1 1/2	100	PZ	
1410916	2	100	PZ	

**- DECK AND COCKPIT DRAINS -****Truedesign Cockpit Threaded Drain Fitting**

Cockpit threaded recessed drain moulded from glass-reinforced Composite.
Resistant to chemical and galvanic corrosion, wear and pressure.



New

Cod.	G Thread (")	UM	€
1421112	1/2	PCS	
1421113	3/4	PCS	
1421114	1	PCS	
1421115	1 1/4	PCS	
1421116	1 1/2	PCS	

**Chromed Brass threaded Cockpit Drain**

Chromed Brass threaded cockpit drain.



Cod.	G Thread (")	UM	€
1411902	3/8	PZ	
1411903	1/2	PZ	
1411904	3/4	PZ	
1411905	1	PZ	
1411906	1 1/4	PZ	
1411907	1 1/2	PZ	
1411908	2	PZ	

**S/Steel Round C.B Cockpit Drain**

Deck and cockpit drain with extractable Stainless Steel grid cup and Chromed Brass body.



Cod.	G Thread (")	Grid ø mm	Recess ø mm	H mm	UM	€
1412001	1	50	36	31	PZ	
1412002	1 1/2	75	53	43	PZ	



S/Steel Round XS Deck Drain

Stainless Steel deck and cockpit drain with extractable grid. Connection for 38mm hoses.

Cod.	A mm	B mm	H mm	UM	€
1412003	38	82	59	PZ	

**S/Steel Round XL Cockpit Drain**

Stainless Steel deck and cockpit drain with extractable grid. Connection for 50mm hoses.

Cod.	D mm	B mm	H mm	UM	€
1412008	50	79	80	PZ	

**S/Steel XS 90° Barb Cockpit Drain**

Stainless Steel barb cockpit drain with extractable grid for decks and baths. Connection for 38mm hoses.

Cod.	C mm	A mm	B mm	H mm	UM	€
1412004	38	80	100	79	PZ	

**S/Steel Large Neck Cockpit Drain**


316 Stainless Steel cockpit drain with extractable grid and large neck for an easy cleaning. Connection for 40mm hoses.

Cod.	C mm	A mm	B mm	L mm	UM	€
1412005	40	92	115	105	PZ	

**S/Steel Oval Plate Deck and Cockpit Drain**

316 Stainless Steel deck and cockpit drain with extractable grid. Connection for 38mm hoses.

Cod.	Pipe-to-Hose ø mm	Grid Dim mm	Recess H mm	UM	€
1412006	38	190 x 90	80	PZ	

**Hi-Flow Deck and Cockpit Drain**

316 Stainless Steel and Nylon deck and cockpit drain with extractable grid.

Cod.	Pipe-to-Hose ø mm	Grid ø mm	Recess H mm	UM	€
1412020	38 (1 1/2")	75	61	PZ	
1412022	51 (2")	75	74	PZ	

**Stainless Steel Mini Barb Drain**

Stainless Steel and rubber drain, ideal for small recesses where the water struggles to flow. It is easily mounted with the rubber push-in hose fitting.

Cod.	Pipe-to-Hose ø mm	Hole ø mm	Flange ø mm	L mm	UM	€
1412013	13 (1/2")	10	16	36	PCS	
1412016	16 (5/8")	13	19	39	PCS	
1412019	20 (3/4")	16	22	44	PCS	



Mushroom Head Thru-Hull Connector

Threaded Brass mushroom head thru-hull connector.

Cod.	G Thread (")	L mm	UM	€
1410002	3/8	55	PCS	
1410003	1/2	65	PCS	
1410004	3/4	70	PCS	
1410005	1	85	PCS	
1410006	1 1/4	86	PCS	
1410007	1 1/2	96	PCS	
1410008	2	107	PCS	
1410009	2 1/2	130	PCS	
1410010	3	158	PCS	

**Bronze Mushroom Head Thru-Hull Connector Long**

Long threaded Bronze mushroom head thru-hull connector.

Cod.	G Thread (")	L mm	UM	€
1411005	1	207	PCS	
1411006	1 1/4	207	PCS	
1411007	1 1/2	207	PCS	

**Chromed Brass Mushroom Head Thru-Hull Connector**

Chromed Brass threaded mushroom head thru-hull connector.

Cod.	G Thread (")	UM	€
1410902	3/8	PCS	
1410903	1/2	PCS	
1410904	3/4	PCS	
1410905	1	PCS	
1410906	1 1/4	PCS	
1410907	1 1/2	PCS	
1410908	2	PCS	

**Stainless Steel Threaded Mushroom Head Thru-Hull Connector**

Stainless Steel threaded mushroom head thru-hull connector.

Cod.	G Thread (")	UM	€
1439302	3/8	PCS	
1439303	1/2	PCS	
1439304	3/4	PCS	
1439305	1	PCS	
1439306	1 1/4	PCS	
1439307	1 1/2	PCS	
1439308	2	PCS	

**Bronze Mushroom Head Thru-Hull Connector**

Threaded Bronze mushroom head thru-hull connector.

Cod.	G Thread (")	UM	€
1410023	1/2	PCS	
1410024	3/4	PCS	
1410025	1	PCS	
1410026	1 1/4	PCS	
1410027	1 1/2	PCS	
1410028	2	PCS	

**Trudesign Threaded Thru-Hull Drain Fitting**


Threaded thru-hull drain moulded from glass-reinforced Composite. Resistant to chemical and galvanic corrosion, wear and pressure.

Cod.	G Thread (")	UM	€
1421102	1/2	PCS	
1421103	3/4	PCS	
1421104	1	PCS	
1421105	1 1/4	PCS	
1421106	1 1/2	PCS	
1421107	2	PCS	

**Brass Intake Strainer**


Brass intake strainer.

Cod.	G Thread (")	UM	€
1415002	3/8	PCS	
1415003	1/2	PCS	
1415004	3/4	PCS	
1415005	1	PCS	
1415006	1 1/4	PCS	
1415007	1 1/2	PCS	
1415008	2	PCS	
1415009	2 1/2	PCS	
1415010	3	PCS	

**Stainless Steel Intake Strainer**


Stainless Steel intake strainer.

Cod.	G Thread (")	UM	€
1439502	3/8	PCS	
1439503	1/2	PCS	
1439504	3/4	PCS	
1439505	1	PCS	
1439506	1 1/4	PCS	
1439507	1 1/2	PCS	
1439508	2	PCS	

**Bronze Intake Strainer**

Bronze intake strainer. To be completed with 1410023/28 mushroom head thru-hull connectors.

Cod.	G Thread (")	UM	€
1415043	1/2	PCS	
1415044	3/4	PCS	
1415045	1	PCS	
1415046	1 1/4	PCS	
1415047	1 1/2	PCS	
1415048	2	PCS	

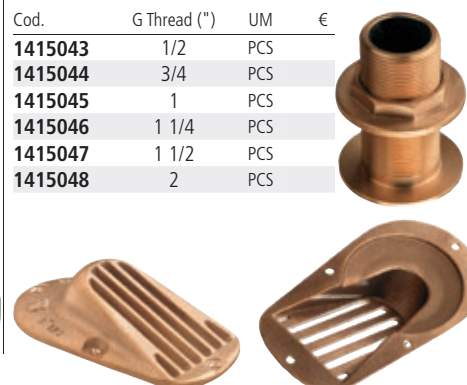

**Brass Ball Valve**

Full flow Brass ball valve. Stainless Steel handle. Ball with antifreeze hole.

Cod.	G Thread (")	UM	€
1420001	1/4	PCS	
1420002	3/8	PCS	
1420003	1/2	PCS	
1420004	3/4	PCS	
1420005	1	PCS	
1420006	1 1/4	PCS	
1420007	1 1/2	PCS	
1420008	2	PCS	
1420009	2 1/2	PCS	
1420010	3	PCS	

**Stainless Steel Ball Valve**

Stainless Steel ball valve.

Cod.	G Thread (")	UM	€
1420301	1/4	PCS	
1420302	3/8	PCS	
1420303	1/2	PCS	
1420304	3/4	PCS	
1420305	1	PCS	
1420306	1 1/4	PCS	
1420307	1 1/2	PCS	
1420308	2	PCS	

**Bronze Ball Valve**

Full flow Bronze ball valve with Stainless Steel handle. RINa certified.

Cod.	G Thread (")	UM	€
1420102	3/8	PCS	
1420103	1/2	PCS	
1420104	3/4	PCS	
1420105	1	PCS	
1420106	1 1/4	PCS	
1420107	1 1/2	PCS	
1420108	2	PCS	

**3 Way Brass Ball Valve**

3 Way Brass ball valve. 3-Position T flow handle.

Cod.	G Thread (")	UM	€
1423001	1/4	PCS	
1423002	3/8	PCS	
1423003	1/2	PCS	
1423004	3/4	PCS	

**Bronze Anti-Block Valve**

Full flow anti-block Bronze valve. It does not get blocked even after long time of non-use.

Cod.	G Thread (")	UM	€
1420123	1/2	PCS	
1420124	3/4	PCS	
1420125	1	PCS	
1420126	1 1/4	PCS	
1420127	1 1/2	PCS	
1420128	2	PCS	

**Brass Check Valve**

Brass check valve.

Cod.	G Thread (")	UM	€
1422101	1/4	PCS	
1422102	3/8	PCS	
1422103	1/2	PCS	
1422104	3/4	PCS	
1422105	1	PCS	
1422106	1 1/4	PCS	
1422107	1 1/2	PCS	
1422108	2	PCS	



FITTINGS AND HOSES

BRASS PIPE FITTINGS

Brass Elbow M-F

Brass male-female elbow.

Cod.	G Thread (")	UM	€
1432001	1/4	PCS	
1432002	3/8	PCS	
1432003	1/2	PCS	
1432004	3/4	PCS	
1432005	1	PCS	
1432006	1 1/4	PCS	
1432007	1 1/2	PCS	
1432008	2	PCS	
1432009	2 1/2	PCS	
1432010	3	PCS	

**Brass Elbow F-F**

Brass female-female elbow.

Cod.	G Thread (")	UM	€
1432501	1/4	PCS	
1432502	3/8	PCS	
1432503	1/2	PCS	
1432504	3/4	PCS	
1432505	1	PCS	
1432506	1 1/4	PCS	
1432507	1 1/2	PCS	
1432508	2	PCS	
1432509	2 1/2	PCS	
1432510	3	PCS	

**Brass Double Nipple**

Brass double nipple.

Cod.	G Thread (")	UM	€
1433001	1/4	PCS	
1433002	3/8	PCS	
1433003	1/2	PCS	
1433004	3/4	PCS	
1433005	1	PCS	
1433006	1 1/4	PCS	
1433007	1 1/2	PCS	
1433008	2	PCS	
1433009	2 1/2	PCS	
1433010	3	PCS	

**Brass Double Reducing Nipple**

Brass reducing double nipple.

Cod.	G Thread (")	UM	€
1434501	1/4x1/8	PCS	
1434502	3/8x1/4	PCS	
1434503	1/2x3/8	PCS	
1434504	3/4x1/2	PCS	
1434505	1x3/4	PCS	
1434506	1 1/4x1	PCS	
1434507	1 1/2x1 1/4	PCS	
1434508	2x1 1/2	PCS	

**Brass Hex Pipe Bushing M-F**

Brass male to female hex pipe bushing.

Cod.	G Thread (")	UM	€
1435001	1/4x1/8	PCS	
1435002	3/8x1/4	PCS	
1435003	1/2x3/8	PCS	
1435004	3/4x1/2	PCS	
1435005	1x3/4	PCS	
1435006	1 1/4x1	PCS	
1435007	1 1/2x1 1/4	PCS	
1435008	2x1 1/2	PCS	

**Brass Coupling F**

Brass female coupling.

Cod.	G Thread (")	UM	€
1433501	1/4	PCS	
1433502	3/8	PCS	
1433503	1/2	PCS	
1433504	3/4	PCS	
1433505	1	PCS	
1433506	1 1/4	PCS	
1433507	1 1/2	PCS	
1433508	2	PCS	
1433509	2 1/2	PCS	
1433510	3	PCS	

**Brass Square Head Plug M**

Brass square head plug.

Cod.	G Thread (")	UM	€
1435501	1/4	PCS	
1435502	3/8	PCS	
1435503	1/2	PCS	
1435504	3/4	PCS	
1435505	1	PCS	
1435506	1 1/4	PCS	
1435507	1 1/2	PCS	
1435508	2	PCS	

**Brass Pipe-to-Hose F**

Brass female pipe-to-hose.

Cod.	G Thread (") x mm	UM	€
1431010	1/4x10	PCS	
1431015	3/8x15	PCS	
1431020	1/2x20	PCS	
1431025	3/4x25	PCS	
1431030	1x30	PCS	
1431040	1 1/4x40	PCS	
1431045	1 1/2x45	PCS	
1431050	2x50	PCS	

**Brass Pipe-to-Hose M**

Brass male pipe-to-hose.

Cod.	G Thread (") x mm	UM	€
1430005	1/8x8	PCS	
1430006	1/4x6	PCS	
1430008	1/4x8	PCS	
1430010	1/4x10	PCS	
1430011	3/8x10	PCS	
1430013	3/8x13	PCS	
1430014	3/8x18	PCS	
1430015	3/8x15	PCS	
1430210	1/2x10	PCS	
1430213	1/2x13	PCS	
1430016	1/2x15	PCS	
1430017	1/2x16	PCS	

Cod.	G Thread (") x mm	UM	€
1430018	1/2x18	PCS	
1430020	1/2x20	PCS	
1430022	3/4x20	PCS	
1430025	3/4x25	PCS	
1430030	1x30	PCS	
1430035	1x35	PCS	
1430038	1 1/4x38	PCS	
1430040	1 1/4x40	PCS	
1430042	1 1/2x38	PCS	
1430045	1 1/2x45	PCS	
1430050	2x50	PCS	
1430060	2 1/2x60	PCS	
1430075	3x75	PCS	



Brass 45° Elbow M-F

Brass male-female 45° elbow.

Cod.	G Thread (")	UM	€
1432203	1/2	PCS	
1432204	3/4	PCS	
1432205	1	PCS	
1432206	1 1/4	PCS	
1432207	1 1/2	PCS	
1432208	2	PCS	

**Brass 45° Elbow F-F**

Brass female-female 45° elbow.

Cod.	G Thread (")	UM	€
1432551	3/8	PCS	
1432552	1/2	PCS	
1432553	3/4	PCS	
1432554	1	PCS	
1432555	1 1/4	PCS	
1432556	1 1/2	PCS	
1432557	2	PCS	

**Brass Tee**

Brass Tee.

Cod.	G Thread (")	UM	€
1434001	1/4	PCS	
1434002	3/8	PCS	
1434003	1/2	PCS	
1434004	3/4	PCS	
1434005	1	PCS	
1434006	1 1/4	PCS	
1434007	1 1/2	PCS	
1434008	2	PCS	
1434009	2 1/2	PCS	
1434010	3	PCS	

**Brass Y**

Brass Y.

Cod.	G Thread (")	UM	€
1434202	3/8	PCS	
1434203	1/2	PCS	
1434204	3/4	PCS	
1434205	1	PCS	
1434206	1 1/4	PCS	
1434207	1 1/2	PCS	

**Hex Pipe Nut**

Brass plain hex pipe nut.

Cod.	G Thread (")	UM	€
1436001	1/4	PCS	
1436002	3/8	PCS	
1436003	1/2	PCS	
1436004	3/4	PCS	
1436005	1	PCS	
1436006	1 1/4	PCS	
1436007	1 1/2	PCS	
1436008	2	PCS	

**Flanged Pipe Nut**

Brass flanged pipe nut.

Cod.	G Thread (")	UM	€
1436402	3/8	PCS	
1436403	1/2	PCS	
1436404	3/4	PCS	
1436405	1	PCS	
1436406	1 1/4	PCS	
1436407	1 1/2	PCS	
1436408	2	PCS	

**Brass Washer**

Brass washer.

Cod.	ø (")	UM	€
1436602	3/8	PCS	
1436603	1/2	PCS	
1436604	3/4	PCS	
1436605	1	PCS	
1436606	1 1/4	PCS	
1436607	1 1/2	PCS	
1436608	2	PCS	

**Brass Washer with Ground Connection**

Brass washer with ground cable connection. Prevents galvanic current corrosion of brass strainers and drain heads.

Cod.	ø (")	UM	€
1436502	3/8	PCS	
1436503	1/2	PCS	
1436504	3/4	PCS	
1436505	1	PCS	
1436506	1 1/4	PCS	
1436507	1 1/2	PCS	
1436508	2	PCS	
1436509	2 1/2	PCS	
1436510	3	PCS	



Bronze Elbow M-F

Bronze male-female elbow.

Cod.	G Thread (")	UM	€
1432022	3/8	PCS	
1432023	1/2	PCS	
1432024	3/4	PCS	
1432025	1	PCS	
1432026	1 1/4	PCS	
1432027	1 1/2	PCS	
1432028	2	PCS	

**Bronze Elbow F-F**

Bronze female-female elbow.

Cod.	G Thread (")	UM	€
1432522	3/8	PCS	
1432523	1/2	PCS	
1432524	3/4	PCS	
1432525	1	PCS	
1432526	1 1/4	PCS	
1432527	1 1/2	PCS	
1432528	2	PCS	

**Bronze 45° Elbow F-F**

Bronze female-female 45° elbow.

Cod.	G Thread (")	UM	€
1432622	3/8	PCS	
1432623	1/2	PCS	
1432624	3/4	PCS	
1432625	1	PCS	
1432626	1 1/4	PCS	
1432627	1 1/2	PCS	
1432628	2	PCS	

**Bronze Double Nipple**


Bronze double nipple.

Cod.	G Thread (")	UM	€
1433022	3/8	PCS	
1433023	1/2	PCS	
1433024	3/4	PCS	
1433025	1	PCS	
1433026	1 1/4	PCS	
1433027	1 1/2	PCS	
1433028	2	PCS	

**Bronze Double Reducing Nipple**

Bronze double reducing nipple.

Cod.	G Thread (")	UM	€
1434523	1/2x3/8	PCS	
1434524	3/4x1/2	PCS	
1434525	1x3/4	PCS	
1434526	1 1/4x1	PCS	
1434527	1 1/2x1 1/4	PCS	
1434528	2x1 1/2	PCS	

**Bronze Tee**

Bronze Tee.

Cod.	G Thread (")	UM	€
1434022	3/8	PCS	
1434023	1/2	PCS	
1434024	3/4	PCS	
1434025	1	PCS	
1434026	1 1/4	PCS	
1434027	1 1/2	PCS	
1434028	2	PCS	

**Bronze Hex Pipe Bushing M-F**

Bronze male to female hex pipe bushing.

Cod.	G Thread (")	UM	€
1435023	1/2x3/8	PCS	
1435024	3/4x1/2	PCS	
1435025	1x3/4	PCS	
1435026	1 1/4x1	PCS	
1435027	1 1/2x1 1/4	PCS	
1435028	2x1 1/2	PCS	

**Bronze Coupling F**

Bronze female coupling.

Cod.	G Thread (")	UM	€
1433522	3/8	PCS	
1433523	1/2	PCS	
1433524	3/4	PCS	
1433525	1	PCS	
1433526	1 1/4	PCS	
1433527	1 1/2	PCS	
1433528	2	PCS	

**Bronze Pipe-to-Hose M**

Bronze male pipe-to-hose.

Cod.	G Thread (") x mm	UM	€
1430103	3/8x10	PCS	
1430104	3/8x13	PCS	
1430105	3/8x15	PCS	
1430107	1/2x13	PCS	
1430109	1/2x16	PCS	
1430111	1/2x20	PCS	
1430114	3/4x20	PCS	
1430115	3/4x25	PCS	
1430116	1x25	PCS	
1430117	1x30	PCS	
1430121	1 1/4x35	PCS	
1430122	1 1/4x38	PCS	



Cod.	G Thread (") x mm	UM	€
1430123	1 1/4x40	PCS	
1430124	1 1/2x38	PCS	
1430125	1 1/2x40	PCS	
1430126	1 1/2x45	PCS	
1430128	2x50	PCS	

Bronze Square Head Plug M

Bronze square head plug.

Cod.	G Thread (")	UM	€
1435522	3/8	PCS	
1435523	1/2	PCS	
1435524	3/4	PCS	
1435525	1	PCS	
1435526	1 1/4	PCS	
1435527	1 1/2	PCS	
1435528	2	PCS	



Stainless Steel Elbow 90° M-F

Stainless Steel male-female 90° elbow.

Cod.	G Thread (")	UM	€
1438202	3/8	PCS	
1438203	1/2	PCS	
1438204	3/4	PCS	
1438205	1	PCS	
1438206	1 1/4	PCS	
1438207	1 1/2	PCS	
1438208	2	PCS	

**Stainless Steel Elbow 90° F-F**

Stainless Steel female-female 90° elbow.

Cod.	G Thread (")	UM	€
1438302	3/8	PCS	
1438303	1/2	PCS	
1438304	3/4	PCS	
1438305	1	PCS	
1438306	1 1/4	PCS	
1438307	1 1/2	PCS	
1438308	2	PCS	

**Stainless Steel Elbow 45° F-F**

Stainless Steel female-female 45° elbow.

Cod.	G Thread (")	UM	€
1438402	3/8	PCS	
1438403	1/2	PCS	
1438404	3/4	PCS	
1438405	1	PCS	
1438406	1 1/4	PCS	
1438407	1 1/2	PCS	
1438408	2	PCS	

**Stainless Steel Nipple M-M**

Stainless Steel male to male nipple.

Cod.	G Thread (")	UM	€
1438502	3/8	PCS	
1438503	1/2	PCS	
1438504	3/4	PCS	
1438505	1	PCS	
1438506	1 1/4	PCS	
1438507	1 1/2	PCS	
1438508	2	PCS	

**Stainless Steel Threaded Pipe Coupling**

Stainless Steel threaded pipe coupling.

Cod.	G Thread (")	UM	€
1438602	3/8	PCS	
1438603	1/2	PCS	
1438604	3/4	PCS	
1438605	1	PCS	
1438606	1 1/4	PCS	
1438607	1 1/2	PCS	
1438608	2	PCS	

**Stainless Steel Tee**

Stainless Steel tee.

Cod.	G Thread (")	UM	€
1438702	3/8	PCS	
1438703	1/2	PCS	
1438704	3/4	PCS	
1438705	1	PCS	
1438706	1 1/4	PCS	
1438707	1 1/2	PCS	
1438708	2	PCS	

**Stainless Steel Hex Pipe Bushing M-F**

Stainless Steel male-female hex pipe bushing.

Cod.	G Thread (") x mm	UM	€
1438802	3/8x1/4	PCS	
1438803	1/2x3/8	PCS	
1438804	3/4x1/2	PCS	
1438805	1x3/4	PCS	
1438806	1 1/4x1	PCS	
1438807	1 1/2x1 1/4	PCS	
1438808	2x1 1/2	PCS	

**Stainless Steel Hex Head Plug**

Stainless Steel hex head plug.

Cod.	G Thread (")	UM	€
1438902	3/8	PCS	
1438903	1/2	PCS	
1438904	3/4	PCS	
1438905	1	PCS	
1438906	1 1/4	PCS	
1438907	1 1/2	PCS	
1438908	2	PCS	

**Stainless Steel Pipe-to-Hose F**

Stainless Steel female pipe to hose.

Cod.	G Thread (") x mm	UM	€
1438115	3/8x15	PCS	
1438120	1/2x20	PCS	
1438125	3/4x25	PCS	
1438130	1x30	PCS	
1438140	1 1/4x40	PCS	
1438145	1 1/2x45	PCS	
1438150	2x50	PCS	

**Stainless Steel Pipe-to-Hose M**

Stainless Steel male pipe to hose.

Cod.	G Thread (") x mm	UM	€
1438009	1/4x9	PZ	
1438011	3/8x11	PZ	
1438015	3/8x15	PZ	
1438016	1/2x15	PZ	
1438020	1/2x20	PZ	
1438022	3/4x20	PZ	
1438025	3/4x25	PZ	
1438030	1x30	PZ	
1438036	1 1/4x35	PZ	
1438040	1 1/4x40	PZ	
1438043	1 1/2x40	PZ	
1438045	1 1/2x45	PZ	
1438050	2x50	PZ	



Trudesign M Pipe-To-Hose

Male pipe-to-hose moulded from glass-reinforced Composite.
Resistant to chemical and galvanic corrosion, wear and pressure.
Non-toxic material. Operating temperature -40°C +110°C.
For applications above and below the waterline.

Cod.	G Thread (")	ø mm Pipe-to-Hose	UM	€
1441001	1/2	13	PCS	
1441002	1/2	16	PCS	
1441003	3/4	19	PCS	
1441004	1	25	PCS	
1441005	1 1/4	32	PCS	
1441006	1 1/4	38	PCS	
1441007	1 1/2	32	PCS	
1441008	1 1/2	38	PCS	
1441009	2	50	PCS	



• New



TRUDESIGN

Trudesign F Pipe-To-Hose

Female pipe-to-hose moulded from glass-reinforced Composite.
Resistant to chemical and galvanic corrosion, wear and pressure.
Non-toxic material. Operating temperature -40°C +110°C.
For applications above and below the waterline.

Cod.	G Thread (")	ø mm Pipe-to-Hose	UM	€
1441042	3/4	19	PCS	
1441043	1	25	PCS	
1441044	1 1/4	32	PCS	
1441045	1 1/4	38	PCS	
1441046	1 1/2	38	PCS	
1441047	2	50	PCS	



• New



TRUDESIGN

Trudesign 90° M Pipe-to-Hose

90° Male pipe-to-hose moulded from glass-reinforced Composite.
Resistant to chemical and galvanic corrosion, wear and pressure.
Non-toxic material. Operating temperature -40°C +110°C.
For applications above and below the waterline.

Cod.	G Thread (")	ø mm Pipe-to-Hose	UM	€
1441012	1/2	13	PCS	
1441013	3/4	19	PCS	
1441014	1	25	PCS	
1441015	1 1/4	32	PCS	
1441016	1 1/4	38	PCS	
1441017	1 1/2	38	PCS	
1441018	2	50	PCS	



• New



TRUDESIGN

Trudesign 120° M Pipe-To-Hose

120° Male pipe-to-hose moulded from glass-reinforced Composite.
Resistant to chemical and galvanic corrosion, wear and pressure.
Non-toxic material. Operating temperature -40°C +110°C.
For applications above and below the waterline.

Cod.	G Thread (")	ø mm Pipe-to-Hose	UM	€
1441034	1	25	PCS	
1441035	1 1/4	32	PCS	
1441036	1 1/4	38	PCS	
1441037	1 1/2	38	PCS	
1441038	2	50	PCS	



• New



TRUDESIGN

Trudesign 90° M/F Elbow

90° Male/Female elbow moulded from glass-reinforced Composite.
Resistant to chemical and galvanic corrosion, wear and pressure.
Non-toxic material. Operating temperature -40°C +110°C.
For applications above and below the waterline.

Cod.	G Thread (")	UM	€
1441052	3/4	PCS	
1441053	1	PCS	
1441054	1 1/4	PCS	
1441055	1 1/2	PCS	
1441056	2	PCS	



• New



TRUDESIGN

PP Elbow F-F

Female-female Polypropylene elbow. The Polypropylene (PP) fittings offer the perfect solution for several nautical applications as for hot and cold water pressure systems. Nontoxic, resistant to wearing, abrasion and atmospheric agents.

Cod.	G Thread (")	UM	€
1440112	1/2	PCS	
1440113	3/4	PCS	
1440114	1	PCS	
1440115	1 1/4	PCS	
1440116	1 1/2	PCS	
1440117	2	PCS	

**PP Elbow M-F**

Male-female Polypropylene elbow. The Polypropylene (PP) fittings offer the perfect solution for several nautical applications as for hot and cold water pressure systems. Nontoxic, resistant to wearing, abrasion and atmospheric agents.

Cod.	G Thread (")	UM	€
1440102	1/2	PCS	
1440103	3/4	PCS	
1440104	1	PCS	
1440105	1 1/4	PCS	
1440106	1 1/2	PCS	
1440107	2	PCS	

**PP Coupling**

Polypropylene coupling. The Polypropylene (PP) fittings offer the perfect solution for several nautical applications as for hot and cold water pressure systems. Nontoxic, resistant to wearing, abrasion and atmospheric agents.

Cod.	G Thread (")	UM	€
1440137	1/2	PCS	
1440138	3/4	PCS	
1440139	1	PCS	
1440140	1 1/4	PCS	
1440141	1 1/2	PCS	
1440142	2	PCS	

**PP T Fitting F**

Polypropylene female T fittings. The Polypropylene (PP) fittings offer the perfect solution for several nautical applications as for hot and cold water pressure systems. Nontoxic, resistant to wearing, abrasion and atmospheric agents.

Cod.	G Thread (")	UM	€
1440162	1/2	PCS	
1440163	3/4	PCS	
1440164	1	PCS	
1440165	1 1/4	PCS	
1440166	1 1/2	PCS	
1440167	2	PCS	

**PP Nipple**

Polypropylene nipple. The Polypropylene (PP) fittings offer the perfect solution for several nautical applications as for hot and cold water pressure systems. Nontoxic, resistant to wearing, abrasion and atmospheric agents.

Cod.	G Thread (")	UM	€
1440120	1/2	PCS	
1440121	3/4	PCS	
1440122	1	PCS	
1440123	1 1/4	PCS	
1440124	1 1/2	PCS	
1440125	2	PCS	

**PP Reducing Nipple**

Polypropylene reduced nipple. The Polypropylene (PP) fittings offer the perfect solution for several nautical applications as for hot and cold water pressure systems. Nontoxic, resistant to wearing, abrasion and atmospheric agents.

Cod.	G Thread (")	UM	€
1440127	3/4 x 1/2	PCS	
1440129	1 x 3/4	PCS	
1440131	1 1/4 x 1	PCS	
1440132	1 1/2 x 1	PCS	
1440133	1 1/2 x 1 1/4	PCS	
1440134	2 x 1 1/2	PCS	

**PP Reducing Bush M-F**

Polypropylene male-female reducing bush. The Polypropylene (PP) fittings offer the perfect solution for several nautical applications as for hot and cold water pressure systems. Nontoxic, resistant to wearing, abrasion and atmospheric agents.

Cod.	G Thread (")	UM	€
1440147	3/4 x 1/2	PCS	
1440148	1 x 1/2	PCS	
1440149	1 x 3/4	PCS	
1440151	1 1/4 x 3/4	PCS	
1440152	1 1/4 x 1	PCS	
1440154	1 1/2 x 1	PCS	
1440155	1 1/2 x 1 1/4	PCS	
1440156	2 x 1	PCS	

**PP Plug**

Polypropylene plug. The Polypropylene (PP) fittings offer the perfect solution for several nautical applications as for hot and cold water pressure systems. Nontoxic, resistant to wearing, abrasion and atmospheric agents.

Cod.	G Thread (")	UM	€
1440170	1/2	PCS	
1440171	3/4	PCS	
1440172	1	PCS	
1440173	1 1/4	PCS	
1440174	1 1/2	PCS	
1440175	2	PCS	

**PP Pipe-to-Hose M**

Polypropylene male pipe to hose. The Polypropylene (PP) fittings offer the perfect solution for several nautical applications as for hot and cold water pressure systems. Nontoxic, resistant to wearing, abrasion and atmospheric agents.

Cod.	G Thread (") x mm	UM	€
1440010	1/2 x 13	PZ	
1440011	1/2 x 16	PZ	
1440012	1/2 x 20	PZ	
1440016	3/4 x 16	PZ	
1440017	3/4 x 20	PZ	
1440018	3/4 x 25	PZ	
1440019	1 x 20	PZ	
1440020	1 x 22	PZ	
1440021	1 x 25	PZ	
1440022	1 x 30	PZ	
1440027	1 1/4 x 35	PZ	
1440028	1 1/4 x 38	PZ	
1440029	1 1/4 x 40	PZ	
1440030	1 1/2 x 38	PZ	
1440031	1 1/2 x 40	PZ	
1440033	1 1/2 x 50	PZ	
1440035	2 x 50	PZ	

**PP 90° Elbow M Pipe-to-Hose**

Nontoxic Polypropylene (PP) 90° elbow male pipe to hose for nautical applications.

Cod.	G Thread (") x mm	UM	€
1440180	1/2 x 13	PZ	
1440181	1/2 x 16	PZ	
1440182	1/2 x 20	PZ	
1440183	3/4 x 20	PZ	
1440184	1 x 20	PZ	
1440185	1 x 30	PZ	



PL In-Line Joiner

Plastic in line fitting.

Cod.	For Hose ø mm	UM	€
1422216	12/14/16	PCS	
1422222	18/20/22	PCS	

**PL Tee**

Plastic tee fitting.

Cod.	For Hose ø mm	UM	€
1422310	10	PCS	
1422312	12	PCS	
1422314	14	PCS	
1422316	16	PCS	
1422320	20	PCS	
1422322	22	PCS	
1422325	25	PCS	

**PL Y Joiner**

Plastic Y fitting.

Cod.	For Hose ø mm	UM	€
1421310	10	PCS	
1421312	12	PCS	
1421314	14	PCS	
1421316	16	PCS	

**Johnson Y Fitting**

Y Johnson Plastic fittings. Enable two pumps to discharge through a single line.

Cod.	For Hose ø mm	UM	€
1426053	38-38-25	PCS	
1426054	29/32-29/32-19	PCS	

SPXFLOW
Johnson Pump**PP Ball Valve**

Plastic ball valve.

Cod.	G Thread (")	UM	€
1423302	1/2	PCS	
1423303	3/4	PCS	
1423304	1	PCS	

**Truedesign Ball Valve**

Truedesign ball valve moulded from glass-reinforced Composite. Resistant to chemical and galvanic corrosion, wear and pressure. Non-toxic material. Operating temperature -40°C +110°C. For applications above and below the waterline.

Cod.	G Thread (")	UM	€
1420803	1/2	PCS	
1420804	3/4	PCS	
1420805	1	PCS	
1420806	1 1/4	PCS	
1420807	1 1/2	PCS	
1420808	2	PCS	



New



TRUEDSIGN

Aquavalue 3 Way Diverter Valve

Aquavalue 3 way diverter valve manufactured in Fiber-glass charged Nylon for marine or industrial applications. Pressure test at 300 PSI. Every valve is tested singularly.

Cod.	Ref	UM	€
1423328	Valve 3 x 1" 1/2	PCS	
1441021	ø 19 mm Pipe-to-Hose	PCS	
1441022	ø 25 mm Pipe-to-Hose	PCS	
1441023	ø 32 mm Pipe-to-Hose	PCS	
1441024	ø 38 mm Pipe-to-Hose	PCS	



TRUEDSIGN

Plastic 3 Way Diverter Valve

3 Way light duty Plastic valves for low pressure systems.

Cod.	For Hose ø mm	UM	€
1423325	25 (1")	PCS	
1423326	38 (1" 1/2)	PCS	



Plastic Check Valve

Nylon check valve. Flange dimensions 50 x 45 mm, total length 115 mm.

Cod.	For Hose ø mm	UM	€
1423322	25-38 (1-1 1/2)	PCS	

**Johnson Check Valve**

Johnson Plastic check valve. It maintains priming in suction pipes. In line mount, maintenance and cleaning without using any tools.

Cod.	For Hose ø mm	UM	€
1426050	25/38 (1" - 1" 1/2)	PCS	
1426051	19/32 (3/4" - 1" 1/4)	PCS	

**- PLASTIC VALVES AND BILGE STRAINERS -****Johnson Bilge Strainer with Check Valve**


Johnson bilge strainer with non-return valve designed to prevent bilge debris blocking the inlet suction pipe. It maintains priming in suction pipes. Easy to maintain and clean without using any tools.

Cod.	For Hoses ø mm	UM	€
1426039	19/32 (3/4" - 1" 1/4) - 25/38 (1" - 1" 1/2)	PCS	

**Suka Bilge Strainer**

Plastic bilge strainer with pipe-to-hose fitting.

Cod.	mm	For Hoses ø mm	UM	€
1426024	145 x 60 x H38	18/20/24	PCS	

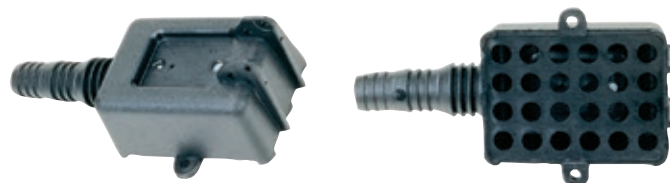**Bilge Strainer with Check Valve**


Horizontal and vertical bilge strainer with check valve.

Cod.	Ref	For Hoses ø mm	UM	€
1426036	Vertical	25/38 (1" - 1 1/2")	PCS	
1426037	Horizontal	25/38 (1" - 1 1/2")	PCS	

**Brass Bilge Strainer**

Brass bilge strainer with net filter and pipe-to-hose.

Cod.	mm	For Hoses ø mm	UM	€
1426020	80 x 70 x H21	20	PCS	
1426025	110 x 90 x H27	25	PCS	

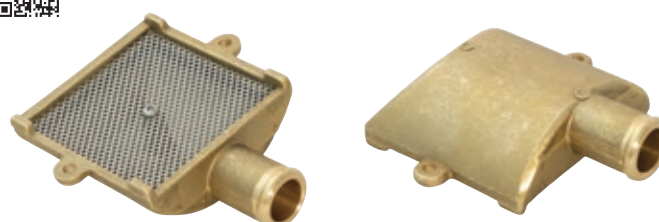

**John Guest Speedfit Quick Fittings**

John Guest quick connect fittings for sanitary systems. Push-fit fastening system with Stainless Steel tweezers fitted for withholding the tubing and an O-ring fitted for ensuring a perfect seal. Operating temperature and pressure: Cold water supply: standard temperature from 1° to 20°. Maximum pressure 12 bar. Hot water supply: standard temperature 65° - 95° max. Maximum pressure 6 bar.

The spigoted threaded terminal is inserted into a connecting elbow, into a T fitting or into a straight fitting when a threaded fitting is needed.

John Guest



Cod.	Type	Ref	For Hose ø mm	Inch Connection	UM	€
1448020	A	Inline Connection	15		PCS	
1448050	B	Elbow Connection	15		PCS	
1448060	C	T Connection	15		PCS	
1448061	D	Head Threaded Elbow Connection	15	1/2	PCS	
1448030	E	Elbow Spigot Connection	15		PCS	
1448010	F	Inline Male Terminal with Spigot	15	3/8	PCS	
1448011	F	Inline Male Terminal with Spigot	15	1/2	PCS	
1448091	G	12 mm Pipe-to-Hose Connector	15		PCS	
1448000	H	Inline Male Terminal	15	3/8	PCS	
1448001	H	Inline Male Terminal	15	1/2	PCS	
1448003	I	Inline Male Brass Terminal	15	1/2	PCS	
1448070	J	Terminal Cap	15		PCS	
1448t040	K	Inline Female Terminal for Taps	15	1/2	PCS	
1448041	K	Inline Female Terminal for Taps	15	3/4	PCS	
1448021	L	Inline Female Terminal for Taps Brass Nut	15	1/2	PCS	
1448022	L	Inline Female Terminal for Taps Brass Nut	15	3/4	PCS	
1448051	M	Elbow Connection for Taps Brass Nut	15	1/2	PCS	
1448101	N	Flex Pipe Fast Connect	15	1/2	PCS	
1448102	N	Flex Pipe Fast Connect	15	3/4	PCS	



John Guest Quick Fittings' Accessories

John Guest quick connect fittings' accessories.



John Guest

Cod.	Type	Ref	For Hose ø mm	UM	€
1448100	A	PEX Pipe 15 mm x 3 mt		PCS	
1448120100	B	15 mm LLDPE Flexible Hose x 100 mt BLUE		MT	
1448122100	B	15 mm LLDPE Flexible Hose x 100 mt RED		MT	
1448103	C	Compression Fittings Hose Insert	15	PCS	
1448110	D	Pipe Clamp	15	PCS	
1448111	E	Elbow Pipe Holder	15	PCS	
1448105	F	RED Identification Clip	15	PCS	
1448106	F	BLUE Identification Clip	15	PCS	
1448090	G	Wiretap Valve	15	PCS	
1448080	H	Tanks Through-Wall	15	PCS	
1448081	I	3/4 Connection Through-Wall Elbow	15	PCS	
1448122	L	Pipe Cutter	Up to 22	PCS	



- BD FAST QUICK CONNECT PIPE FITTINGS -

BD Fast Compact Quick Coupling

BD Fast Polypropylene quick pipe-to-hose coupling. Perfect to connect quickly any type of flexible hose to the water system. Watertight seal up to 16 bar. Eliminates the usual hose clamp.



Cod.	G Thread (")	For Hose ø mm	Hoses Thickness mm	UM	€
1440350	1/2	10	2,5<>3,5	PCS	
1440351	1/2	13	2,5<>3,5	PCS	
1440352	1/2	16	2<>4	PCS	
1440353	1/2	20	2,5<>4,5	PCS	
1440355	3/4	16	2<>4	PCS	
1440356	3/4	20	2,5<>4,5	PCS	



BD Fast Quick Coupling

BD Fast Polypropylene quick pipe-to-hose coupling. Perfect to connect quickly any type of flexible and spiral/corrugated hose to the water system. Watertight seal up to 10 bar. Eliminates the usual hose clamp.



Cod.	G Thread (")	For Hose ø mm	Hoses Thickness mm	UM	€
1440302	1/2	20	2,5<>3,5	PCS	
1440303	3/4	20	2,5<>3,5	PCS	
1440304	3/4	25	2,5<>3,5	PCS	
1440306	1	25	2,5<>3,5	PCS	
1440307	1	30	2,5<>4	PCS	
1440308	1 1/4	30	2,5<>4	PCS	
1440311	1 1/2	38	3<>5	PCS	
1440312	1 1/2	40	3<>5	PCS	



BD Fast 90° Compact Quick Coupling

BD Fast Polypropylene 90° quick pipe-to-hose coupling. Perfect to connect quickly any type of flexible hose to the water system. Watertight seal up to 16 bar. Eliminates the usual hose clamp.



Cod.	G Thread (")	For Hose ø mm	Hoses Thickness mm	UM	€
1440340	1/2	10	2<>3,5	PCS	
1440341	1/2	13	2<>3,5	PCS	
1440342	1/2	16	2<>4	PCS	
1440343	3/4	16	2<>4	PCS	
1440345	3/4	20	2,5<>4,5	PCS	



BD Fast 90° Quick Coupling

BD Fast Polypropylene 90° quick pipe-to-hose coupling. Perfect to connect quickly any type of flexible and spiral/corrugated hose to the water system. Watertight seal up to 10 bar. Eliminates the usual hose clamp.



Cod.	G Thread (")	For Hose ø mm	Hoses Thickness mm	UM	€
1440322	1	25	2,5<>3,5	PCS	
1440324	1 1/4	30	2,5<>4	PCS	
1440327	1 1/2	38	3<>5	PCS	
1440328	1 1/2	40	3<>5	PCS	



AC R2T Press Bushings

Carbon Steel press bushings for R2T tubing.

Cod.	Dim	UM	€
5351008	1/4"	PCS	
5351009	5/16"	PCS	
5351010	3/8"	PCS	
5351012	1/2"	PCS	

**AC R7 Press Bushings**

Carbon Steel press bushings for R7 tubing.

Cod.	Dim	UM	€
5351106	3/16"	PCS	
5351108	1/4"	PCS	
5351109	5/16"	PCS	
5351110	3/8"	PCS	
5351112	1/2"	PCS	

**AC R2T/R7 Press Fittings**

Carbon Steel press fittings for R2T/R7 tubing.

Cod.	Dim	UM	€
5351206	3/16"	PCS	
5351208	1/4"	PCS	
5351209	5/16"	PCS	
5351210	3/8"	PCS	
5351212	1/2"	PCS	

**AC R2T/R7 90° Press Fittings**

Carbon Steel 90° press fittings for R2T/R7 tubing.

Cod.	Dim	UM	€
5351306	3/16"	PCS	
5351308	1/4"	PCS	
5351309	5/16"	PCS	
5351310	3/8"	PCS	
5351312	1/2"	PCS	

**AC R2T Reusable Bushings**

Carbon Steel reusable bushings for R2T tubing.

Cod.	Dim	UM	€
5351018	1/4"	PCS	
5351019	5/16"	PCS	
5351020	3/8"	PCS	
5351022	1/2"	PCS	

**AC R7 Reusable Bushings**

Carbon Steel reusable bushings for R7 tubing.

Cod.	Dim	UM	€
5351116	3/16"	PCS	
5351118	1/4"	PCS	
5351119	5/16"	PCS	
5351120	3/8"	PCS	
5351122	1/2"	PCS	

**AC R2T/R7 Reusable Fittings**

Carbon Steel reusable fittings for R2T/R7 tubing.

Cod.	Dim	UM	€
5351216	3/16"	PCS	
5351218	1/4"	PCS	
5351219	5/16"	PCS	
5351220	3/8"	PCS	
5351222	1/2"	PCS	

**AC R2T/R7 90° Reusable Fittings**

Carbon Steel 90° reusable fittings for R2T/R7 tubing.

Cod.	Dim	UM	€
5351316	3/16"	PCS	
5351318	1/4"	PCS	
5351319	5/16"	PCS	
5351320	3/8"	PCS	
5351322	1/2"	PCS	

**Std. AC Nipple Adapters**

Carbon Steel nipple adapters.

Cod.	Dim	UM	€
5351504	1/4" x 1/4"	PCS	
5351508	3/8" x 3/8"	PCS	
5351512	1/2" x 1/2"	PCS	

**Rid. AC Nipple Adapters**

Carbon Steel nipple adapters.

Cod.	Dim	UM	€
5351601	1/4" x 1/8"	PCS	
5351603	3/8" x 1/8"	PCS	
5351604	3/8" x 1/4"	PCS	
5351605	1/2" x 1/4"	PCS	
5351608	1/2" x 3/8"	PCS	

**AC M/F Swiveling Adapters**

Carbon Steel swiveling adapters.

Cod.	Dim	UM	€
5351734	1/4" x 1/4"	PCS	
5351738	3/8" x 3/8"	PCS	
5351742	1/2" x 1/2"	PCS	

**AC M/F 90° Swiveling Adapters**

Carbon Steel 90° swiveling adapters.

Cod.	Dim	UM	€
5351754	1/4" x 1/4"	PCS	
5351758	3/8" x 3/8"	PCS	
5351762	1/2" x 1/2"	PCS	



Double Cone Brass Fittings
Double cone Brass fittings for copper tubes.

Cod.	G Thread (")	For Tubes ø mm	UM	€
1436708	1/4	8	PCS	
1436710	1/4	10	PCS	
1436712	3/8	12	PCS	
1436714	1/2	14	PCS	



- HYDRAULIC O-RINGS AND TUBING -

Bonded Seal Washers
Reusable bonded seal washers. They replace Teflon and Copper seal washers.

Cod.	ø (")	UM	€
5355404	1/4 x 1/4	PCS	
5355408	3/8 x 3/8	PCS	
5355412	1/2 x 1/2	PCS	



BSP O-Rings Kit
382 pieces of O-Rings of various sizes in inches. Professional quality. Material: Nitrile NBR (Nitrile Butadene Rubber)

Cod.	UM	€
5355450	PCK	



Metric O-Rings Kit
404 Pieces of O-Rings of various metric sizes. Professional quality.

Cod.	UM	€
5355454	PCK	



SAE100 R7 Flex Tubing
Resistant, flexible and lightweight SAE100 R7 flex tubing. For steering systems, gangways etc.

Cod.	Inner mm	Outer mm	Bar	Coil m	UM	€
535013510	8,0	14,4 (5/16")	190	10	PCK	
535013515	8,0	14,4 (5/16")	190	15	PCK	
535013520	8,0	14,4 (5/16")	190	20	PCK	
535013530	8,0	14,4 (5/16")	190	30	PCK	
535013610	9,7	16,0 (3/8")	175	10	PCK	
535013620	9,7	16,0 (3/8")	175	20	PCK	
535013630	9,7	16,0 (3/8")	175	30	PCK	



Flex Fuel Hose

Flexible fuel hose.

Cod.	Inner ø mm	L m	UM
4036000	7	25	MT

**ExtraFlex Fuel Hose**

High quality and durable fuel hose, remains flexible over time. Outer diameter 14mm.

Cod.	Inner ø mm	L m	UM	€
4036004	8	25	MT	

**ISO GreyFlex Fuel Hose**

Certified UNI EN ISO 8469 B1 high quality and durable fuel hose.

Cod.	Inner ø mm	L m	UM	€
4036008	8	25	MT	

**R.I.Na. Fuel Hose**

Self-extinguishing rubber hose for fuel supply and intake. R.I.Na. and CE certified.

Cod.	Inner mm	Outer mm	Coil m	UM	€
140200620	6	16	20	MT	
140200820	8	17	20	MT	
140201020	10	19	20	MT	
140201320	12	22	20	MT	
140201520	16	26	20	MT	
140201920	19	30	20	MT	
140202520	25	37	20	MT	
140203020	30	42	20	MT	
140203810	38	52	10	MT	

Cod.	Inner mm	Outer mm	Coil m	UM	€
140204010	40	54	10	MT	
140205010	50	65	10	MT	

**R.I.Na. Helix Wired Fuel Hose**

Self-extinguishing rubber double Steel helix wired hose for fuel supply and intake. R.I.Na. and CE certified.

Cod.	Inner mm	Outer mm	Coil m	UM	€
140213810	38	48	10	MT	
140215010	51	61	10	MT	

**R.I.Na. DIP - 100°C Smooth Engine Exhaust Hose**

Steel helix wire flexible Rubber smooth exhaust hose. For engine water and engine exhaust gas up to 100°C.

Standards: SAE J 2006: 03 R2-ISO 13363:04-Type 2 Class B.

Approved: R.I.Na.-LLOYD'S REGISTER nr.96/00126 (E3).

Cod.	Inner mm	Outer mm	Coil m	UM	€
140331910	19	28	10	MT	
140332510	25	34	10	MT	
140333010	30	39	10	MT	
140334010	40	49	10	MT	
140334510	45	54	10	MT	
140335010	51	61	10	MT	
140336010	60	70	10	MT	

**R.I.Na. DIP - 100°C Corrugated Engine Exhaust Hose**

Steel helix wire flexible corrugated Rubber exhaust hose. For engine water and engine exhaust gas up to 100°C.

Standards: SAE J 2006:2003 R2-ISO 13363:2004-Type 2 Class B.

Approved: LLOYD'S REGISTER N.96/00127 - R.I.Na. N.DIP 075110CS.

Cod.	Inner mm	Outer mm	Coil m	UM	€
140354010	40	48	10	MT	
140354510	45	53	10	MT	
140355010	50	60	10	MT	
140356010	60	70	10	MT	
140357510	75	85	10	MT	
140358010	80	90	10	MT	
140359010	90	100	10	MT	
140360005	102	115	5	MT	
140360010	102	115	10	MT	
140361005	110	122	5	MT	
140361010	110	122	10	MT	
140361205	127	139	5	MT	
140361210	127	139	10	MT	



Cod.	Inner mm	Outer mm	Coil m	UM	€
140361505	152	164	5	MT	
140361510	152	164	10	MT	

**Hot Water Boiler Hose**

Hot resistant Rubber hose for boilers, water heaters and for any water high temperature conduct up to 120°C.



Cod.	Inner mm	Outer mm	Coil m	UM	€
140027310	13	23	10	MT	
140027320	13	23	20	MT	
140027610	16	26	10	MT	
140027620	16	26	20	MT	
140027810	20	30	10	MT	
140027820	20	30	20	MT	

**WC Sanipomp Hose (No Smell)**

Helical Steel wire odorless rubber hose. Designed for toilets and sanitation systems, it blocks unpleasant odors.



Cod.	Inner mm	Outer mm	Coil m	UM	€
140032010	20	29	10	MT	
140032510	25	35	10	MT	
140033810	38	48	10	MT	

**Sanitation Hose**

Steel wire PVC hose.

For sanitation system and gray water intake and drain.



Cod.	Inner mm	Outer mm	Coil m	UM	€
140011630	16	23	30	MT	
140012030	20	27	30	MT	
140012530	25	33	30	MT	
140013030	30	38	30	MT	
140013530	35	44	30	MT	
140013815	38	48	15	MT	
140014015	40	50	15	MT	
140014515	45	54	15	MT	
140015015	50	61	15	MT	

**Armo Hose**

Helical Steel wire reinforced PVC hose. For water intake and drain.

Cod.	Inner mm	Outer mm	Coil m	UM	€	Cod.	Inner mm	Outer mm	Coil m	UM	€
140001030	10	16	30	MT		140003530	35	44	30	MT	
140001230	12	18	30	MT		140003815	38	47	15	MT	
140001430	14	20.4	30	MT		140004015	40	49	15	MT	
140001630	16	22.4	30	MT		140004515	45	55	15	MT	
140001830	18	24.4	30	MT		140005015	50	60	15	MT	
140002030	20	27	30	MT		140006015	60	72	15	MT	
140002530	25	33	30	MT							
140002830	28	36	30	MT							
140003030	30	38.4	30	MT							

**Armoflex Grey Hose**

Helical Steel wire reinforced PVC hose.

For sanitation system and gray water intake and drain.



Cod.	Inner mm	Outer mm	Coil m	UM	€
140041630	16	22,6	30	MT	
140042030	20	27,2	30	MT	
140042530	25	33	30	MT	
140043030	30	38	30	MT	
140043815	38	47	15	MT	

**Ventilation Air Bellows Hose**

Steel helical wire light PVC air bellow hose. For air supply and intake.




Cod.	Inner mm	Coil m	UM	€
1405050	50	10	PCK	
1405060	60	10	PCK	
1405070	70	10	PCK	
1405075	75	10	PCK	
1405080	80	10	PCK	
1405090	90	10	PCK	
1405100	100	10	PCK	



Diamond Sanitation Hose (No Smell)

Sanitary anti-odour PVC hose with stiff anti-shock polymer reinforcement spiral. Thanks to the absence of the metal spiral, it is easily cut to size, extremely flexible, light and robust. Designed and tested EN 13725:2003 to form an odor barrier in waste systems. Resistant to impact, crushing and deformation according to EN-ISO11173/ISO9969/ISO10619-1 standards. Lloyd Register certificate n.LR2156689TA

Cod.	Inner mm	Outer mm	Coil m	UM	€
140092020	20	29	20	MT	
140092520	25	34	20	MT	
140093820	38	50	20	MT	
140095020 New	50	62	20	MT	

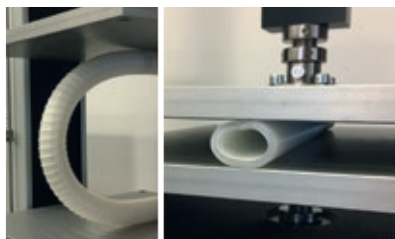**LightFlex Hose**



Corrugated PVC hose with anti-shock rigid polymer reinforcement spiral. Thanks to the absence of the metal spiral, it is easy to cut to size. Flexible, resistant, suitable for ventilation systems, for air intake and for the protection of ducts and cables of any type.

Cod.	Int mm	Pressure bar	Coil m	UM	€
140400250	25	30,0	50	MT	
140400350	32	37,4	50	MT	
140400450	40	46,4	50	MT	
140400550	50	57,0	50	MT	
140400750	70	78,2	50	MT	
140400850	76	84,4	50	MT	
140401030	100	109,4	30	MT	
140401130	110	119,8	30	MT	
140401530	150	161,8	30	MT	

**Refitex Hose**

Non-toxic PVC hose with Polyester textile reinforcement for on-board water systems and for food liquids. Flexible and resistant, it can be cut and assembled according to any need for cold and hot water (60°C) without undergoing deformation or narrowing. Compliant with European directive Reg.(EU)10/2011 for A-B-C simulants.

Cod.	Inner mm	Outer mm	Coil m	Colour	UM	€
140021250	12,3	20	50	BLUE	MT	
140021350	12,3	20	50	RED	MT	
140021950	19	28	50	BLUE	MT	
140022050	19	28	50	RED	MT	

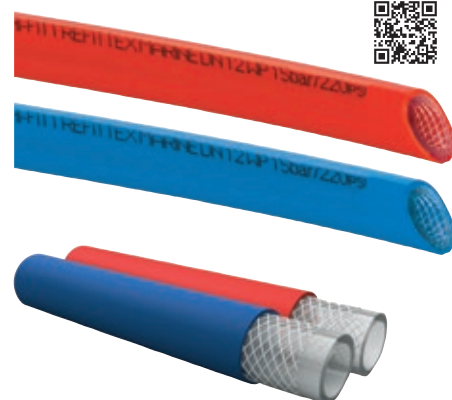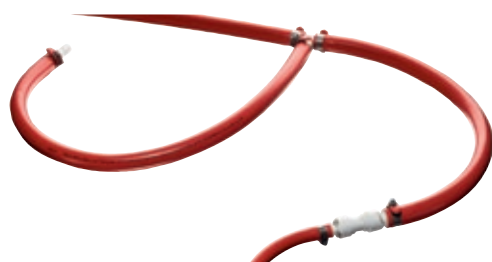**Refitex Crystal Hose**

Transparent non-toxic braided PVC hose, resistant to sea water and most chemical products. Very flexible and resistant, it does not undergo deformation or narrowing, suitable for on-board water systems, bilges, pressurized air and any bridge or dock activity. Compliant with European directive Reg.(EU)10/2011 for A-B-C simulants.

The breaking pressure is equal to three times the working pressure indicated in the table.

Cod.	Int mm	Ext mm	Pressure bar	Coil m	UM	€
140601010	10	16	20	50	MT	
140601210	12	18	12	50	MT	
140601605	16	22	10	50	MT	
140601905	19	26	10	25	MT	
140602505	25	33	8	25	MT	



Flat HD Hose

Flat PVC hose with textile reinforcement and abrasion resistant sheath, ideal for walkable passages where obstacles must be reduced to a minimum. It is also used as a rope cover to protect the mooring clips and any wear parts. The breaking pressure is equal to three times the working pressure indicated in the table.

Cod.	Int mm	Ext Flat mm	Pressure bar	Coil m	UM	€
140302550	25	40	10	50	MT	
140303250	32	60	9	50	MT	
140303850	38	70	8	50	MT	



fitt

NTS Marine Hose

Hose designed for nautical use, ideal for use on any boat and for dockside activities. With outer cover in SkyTech that guarantees high smoothness, NTS anti-torsion and anti-knot technology, resistant to UV rays, sea water, cuts and abrasions. Compliant with European directive Reg.(EU)10/2011 for simulants A-B-C.

Cod.	Inner mm	Coil m	UM	€
140621525	15 (5/8")	25	MT	
140621925	19 (3/4")	25	MT	



fitt

YoYo Extendable Water Hose

Compact, lightweight and handy Ikon extendable water hose. Ready to use package with extendable hose, multi-jet gun and fittings. Abrasion resistant thermoplastic elastomer construction with Nylon knit reinforcement. When activated, the hose stretches approximately twice its original length, does not kink and ensures a constant water flow.

Cod.	L m	UM	€
1428030	15	PCS	
1428032	25	PCS	



fitt

Stretch Hose Extendible Hose

Extendible stretch hose with quick fittings and 7-function spray gun.

- Practic, it expands when in use and contracts back when the water is turned off
- Flexible, will never twist or kink, maintains constant pressure
- Compact and light, easy to store in narrow spaces
- Covered with a strong protection webbing

Warning:

- 1) Never leave the hose under pressure when the spray gun is shut off
- 2) During washing breaks use the outlet lock lever to let out some water

Cod.	L m	Colour	UM	€
1428023	5<->15	BLUE	PCS	
1428024	8<->22	ORANGE	PCS	



S/Steel Germany Type Clamp 9

Full strip DIN 3017 thin clamp. Stainless Steel band, housing and screw. Smooth edges, does not damage clamped hoses.

Cod.	Dia. Range mm	Band mm	UM	€
1400805	8/12	9	PCS	
1400806	10/16	9	PCS	
1400810	12/22	9	PCS	
1400814	16/27	9	PCS	
1400820	20/32	9	PCS	
1400824	25/40	9	PCS	
1400830	30/45	9	PCS	
1400835	32/50	9	PCS	
1400840	40/60	9	PCS	

**S/Steel Germany Type Clamp 12**

Full strip DIN 3017 standard clamp. Stainless Steel band, housing and screw. Smooth edges, does not damage clamped hoses.

Cod.	Dia. Range mm	Band mm	UM	€	Cod.	Dia. Range mm	Band mm	UM	€
1401410	12/22	12	PCS		1401490	90/110	12	PCS	
1401414	16/27	12	PCS		1401492	100/120	12	PCS	
1401418	20/32	12	PCS		1401493	110/130	12	PCS	
1401421	25/40	12	PCS		1401494	120/140	12	PCS	
1401427	35/50	12	PCS						
1401440	40/60	12	PCS						
1401450	50/70	12	PCS						
1401460	60/80	12	PCS						
1401470	70/90	12	PCS						
1401480	80/100	12	PCS						

**S/Steel Hi-Torque Clamp HD**

Heavy duty very sturdy construction clamp with 3 times superior fastening torque. Stainless Steel band, housing and screw.

Cod.	Dia. Range mm	Band mm	UM	€	Cod.	Dia. Range mm	Band mm	UM	€
1401825	27/51	15.8	PCS		1401914	141/165	15.8	PCS	
1401832	33/57	15.8	PCS		1401916	157/178	15.8	PCS	
1401845	46/70	15.8	PCS		1401917	168/216	15.8	PCS	
1401857	59/83	15.8	PCS		1401918	181/254	15.8	PCS	
1401870	71/95	15.8	PCS		1401923	238/311	15.8	PCS	
1401883	84/108	15.8	PCS						
1401895	90/114	15.8	PCS						
1401908	103/127	15.8	PCS						
1401912	117/140	15.8	PCS						
1401913	130/152	15.8	PCS						

**S/Steel T-Bolt Collar HD**

Professional heavy duty bolt collar with 5 times superior fastening torque. Stainless Steel band, nut and screw.

Cod.	Dia. Range mm	UM	€	Cod.	Dia. Range mm	UM	€
1401529	29/31	PCS		1401580	80/85	PCS	
1401532	32/35	PCS		1401586	86/91	PCS	
1401536	36/39	PCS		1401590	92/97	PCS	
1401540	40/43	PCS		1401595	98/103	PCS	
1401544	44/47	PCS		1401596	104/112	PCS	
1401548	48/51	PCS		1401597	113/121	PCS	
1401552	52/55	PCS		1401598	122/130	PCS	
1401556	56/59	PCS		1401599	131/139	PCS	
1401560	60/63	PCS		1401601	140/148	PCS	
1401562	64/67	PCS		1401602	149/161	PCS	
1401568	68/73	PCS		1401603	162/174	PCS	
1401570	74/79	PCS		1401604	175/187	PCS	
				1401605	188/200	PCS	

**Clamp Chock**

Rubber seal clamp chock to hold and fix all type of hoses, pipes and wires. 304 Stainless Steel band.

Cod.	Dia. Range mm	Band mm	UM	€	Cod.	Dia. Range mm	Band mm	UM	€
1400508	8	16	PCS		1400540	40	16	PCS	
1400510	10	16	PCS		1400550	50	16	PCS	
1400512	12	16	PCS		1400560	60	20	PCS	
1400514	14	16	PCS						
1400516	16	16	PCS						
1400518	18	16	PCS						
1400520	20	16	PCS						
1400522	22	16	PCS						
1400525	25	16	PCS						
1400530	30	16	PCS						
1400535	35	16	PCS						



Classic Bailer

Classic Plastic bailer.

Cod.	mm	UM	€
1836000	110 x 365	PCS	



Large Bailer

Reinforced large Plastic bailer.

Cod.	mm	UM	€
1836003	220 x 410	PCS	



Compact Bailer

PVC compact bailer.

Cod.	mm	UM	€
1836001	125 x 180	PCS	



Bailer with Funnel

Plastic bailer with funnel.

Cod.	mm	UM	€
1836002	110 x 290	PCS	



Eco Manual Bilge Pump

High quality and capacity intake manual bilge pump with 80 cm discharge hose and 28 mm fitting. Pump body diameter 60 mm.

Cod.	L cm	UM	€
1835578	35	PCS	
1835580	55	PCS	



MTM

Manual Bilge Pump

High capacity intake manual bilge pump with interchangeable dip tube, 80 cm of flexible discharge hose and 28 mm fittings. Pump body diameter 52 mm.

Cod.	L cm	UM	€
1835535	35	PCS	
1835555	55	PCS	
1835575	75	PCS	



MTM


Drainman Bilge Pump

Drainman Bilge Pump and Mooring Snubber. It activates automatically thanks to the natural force of waves and wind by the pull generated on the mooring line. Can pump up to 2500 liters of water per day. Manufactured with resistant materials, can sustain pulls up to 1500 Kg. Neoprene covered for a perfect protection from UV rays and wearing.

Cod.	UM	€
1834050	PCS	



UNIMER

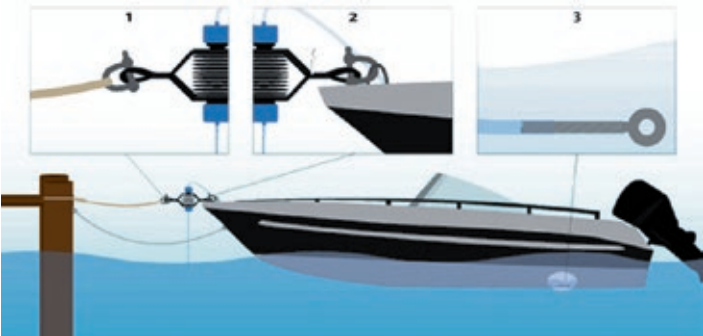

AA Compact Diaphragm Bilge Pump

Diaphragm compact manual bilge pump.

Cod.	Lt/min	Ports ø mm	UM	€
1834020	38	25 (1")	PCS	

**MTM****RM69 S Diaphragm Bilge Pump**

RM69 S Diaphragm compact manual bilge pump.

Cod.	Lt/min	Ports ø mm	Spare Parts	UM	€
1834040	40	25 (1")		PCS	
1834041			Diaphragm Kit	PCK	

**RM
69****SeaFlo Diaphragm Bilge Pump**

SeaFlo diaphragm compact manual bilge pump. Tough and lightweight Polypropylene body, EPDM valve and diaphragm, Stainless Steel screws. With easy remove rotating head to optimize efficiency and maintenance.

Cod.	Lt/min	Ports ø mm	UM	€
1834026	45	38 (1" 1/2)	PCS	

**SEAFLO****AA Standard Diaphragm Bilge Pump**Diaphragm standard manual bilge pump.
With removable lever to optimize space.

Cod.	Lt/min	Ports ø mm	UM	€
1834022	48	25-38 (1" - 1" 1/2)	PCS	

**MTM****AA Universal Diaphragm Bilge Pump**

High capacity diaphragm manual bilge pump. Universal on-deck or bulkhead mount.


With removable lever to optimize space.

Cod.	Lt/min	Ports ø mm	UM	€
1834025	75	38 (1" 1/2)	PCS	

MTM**Ocean 56 Diaphragm Bilge Pump**

Ocean diaphragm bilge pump with removable lever and non-return valve.

Cod.	Lt/min	Ports ø mm	UM	€
1834010	56	38 (1" 1/2)	PCS	

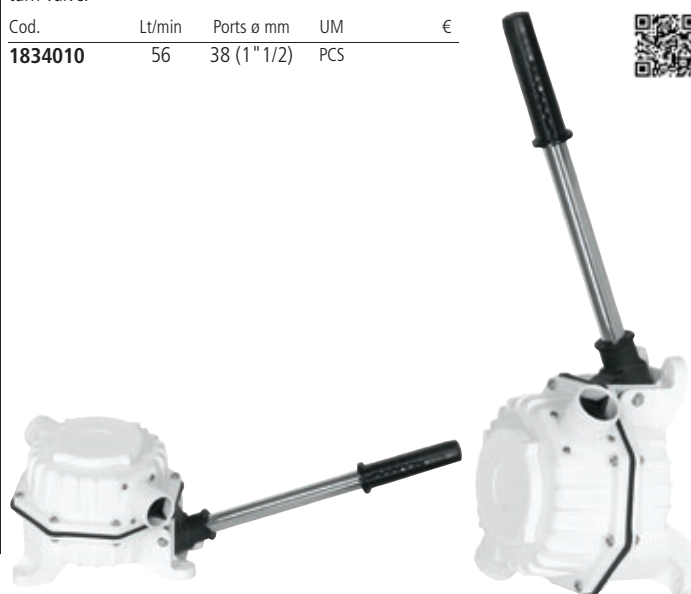Ocean

RM69 MP Diaphragm Bilge Pump

RM69 MP Diaphragm manual bilge pump. Deck or bulkhead mount. Pump body: 240 x 240 x 150 mm. Flange diameter 150 mm.

**RM
69**

Cod.	Lt/min	Ports ø mm	Spare Parts	UM	€
1834064	56	38 (1" 1/2)		PCS	
1834061			Diaphragm Kit	PCK	

**Viking Universal Bilge Pump**

Heavy duty, self-priming, hand-powered bilge pump for nearly any type of installation. The mounting bracket allows for vertical or horizontal surface mounting. With the optional Through Deck Kit the pump can be installed behind bulkheads or below the deck.

**SPXFLOW**
Johnson Pump

Cod.	Lt/min	Ports ø mm	Accessories	UM	€
1834103	60	38 (1" 1/2)		PCS	
1834120			Viking Universal Through Deck Kit	PCS	
4132313			Connection 90° In/Out Ø 38 mm (1" 1/2)	PCS	
4132311			Connection straight In/Out Ø 38 mm (1" 1/2)	PCS	

**Viking Thrudeck & Bulkhead Diaphragm Bilge Pump**

Surface mount (Bulkhead) or below deck recessed mount (Thrudeck) diaphragm bilge pump. Always ready for use thanks to the removable lever. Self-priming with immediate effect up to 3 meters. Thanks to the large outlets it can also be used for pumping toilet waste.

**SPXFLOW**
Johnson Pump

Cod.	Mount	Lt/min	Ports ø mm	UM	€
1834125	Thrudeck	60	38 (1" 1/2)	PCS	
1834130	Bulkhead	60	38 (1" 1/2)	PCS	

**Viking Flush Diaphragm Bilge Pump**

Flush bulkhead mount diaphragm bilge pump. Always ready for use thanks to the integrated handle. Instant self-priming up to 3.3 meters. Inlet and outlet fittings can be turned in any direction.

**SPXFLOW**
Johnson Pump

Cod.	Lt/min	Ports ø mm	Cut Out ø mm	UM	€
1834101	40	25-38 (1" - 1" 1/2)	140	PCS	

**AA Bulkhead Diaphragm Bilge Pump**

Completely flushed diaphragm manual bilge pump. Bulkhead mount with flush lever. Always ready for use thanks to the integrated handle.

**MTM**

Cod.	Lt/min	Ports ø mm	UM	€
1834030	35	25 (1")	PCS	



Rule C Bilge Pump

Rule compact submersible bilge pump. Complete with check valve and safety thermal cut-out.

Dimensions 64 x 74 x H99 mm (Model 1100 = H111 mm).

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1821503	360	23	20 (3/4")	12	PCS	
1821505	500	32	20 (3/4")	12	PCS	
1821511	1100	69	25-30 (1"-1 1/8")	12	PCS	

**Rule LoPro Bilge Pump**

Low profile Rule LoPro submersible bilge pumps ideal for use in narrow spaces. Complete with non-return valve and 180° rotatable drain connection. The automatic version has the built-in switch and activates automatically when water is detected in the bilge. Thanks to the integrated electronic sensor it can also be set to different water levels and activation cycles.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1821630	LP900D Standard	56	20/25/30	12	PCS	
1821632	LP900S Automatic	56	20/25/30	12	PCS	

**Rule L Bilge Pump**

Rule L great capacity and resistance submersible bilge pump.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1821515	1500	95	30	12	PCS	
1821516	1500	95	30	24	PCS	
1821520	2000	126	30	12	PCS	
1821524	2000	126	30	24	PCS	

**Rule HD Bilge Pump**

Rule HD great capacity and resistance submersible bilge pump.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1821530	3700	233	38	12	PCS	
1821534	3700	233	38	24	PCS	

**Rule Automatic Bilge Pump**

Rule submersible automatic bilge pump. Activates automatically when water is detected in the bilge.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1821605	500	32	20	12	PCS	
1821611	1100	69	30	12	PCS	

**Rule-Mate Automatic Bilge Pump**

Rule-Mate automatic submersible bilge pump. Activates automatically when water is detected in the bilge. Dimensions: 130 x 73 x H112

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1821615	500B	32	20/25	12	PCS	
1821617	800B	47	20/25/30	12	PCS	
1821619	1100B	69	20/25/30	12	PCS	
1821620	1100B	69	20/25/30	24	PCS	





Johnson Aqua Void Bilge Pump

Superior quality and durability Johnson Aqua Void submersible bilge pump with detachable base and head for easy cleaning. With watertight wire seal, spare fuses and Deutsch connector for quick disconnection from the mains during maintenance. Thermosetting body with water-cooled sealed motor and Stainless Steel shaft. 3/4 threaded port with 20 mm straight and elbow adjustable hose fittings including gasket and non-return valve. Pump dimensions 70 x 133 x H119 mm.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1822050	500			12	PCS	
1822052	800			12	PCS	



SPXFLOW
Johnson Pump



Johnson Heavy Duty Bilge Pumps

Johnson Heavy Duty great capacity and long life submersible bilge pumps. Designed and built with great reliability and long life materials.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1822016	1600	100	28/32	12	PCS	
1822018	1600	100	28/32	24	PCS	
1822022	2200	130	28/32	12	PCS	
1822024	2200	130	28/32	24	PCS	
1822042	4000	252	38/50	12	PCS	
1822044	4000	252	38/50	24	PCS	



SPXFLOW
Johnson Pump



Low Boy Johnson Extra Flat Bilge Pump

Johnson submersible low-profile bilge pump for tight and narrow bilges. Easy to open and clean. 72 mm height only.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1822101	750	50	19	12	PCS	
1822102	1250	73	28	12	PCS	



SPXFLOW
Johnson Pump



Johnson Aqua Void Ultima Combo Bilge Pump

Superior quality and durability Johnson Aqua Void automatic submersible bilge pump with detachable base and head for easy cleaning. Complete with Ultima electronic switch which automatically activates and deactivates the pump in the presence of water in the bilge. With watertight wire seal, spare fuses and Deutsch connector for quick disconnection from the mains during maintenance. Thermosetting body with water-cooled sealed motor and Stainless Steel shaft. 3/4 threaded port with 20 mm straight and elbow adjustable hose fittings including gasket and non-return valve. Pump dimensions 75 x 168 x H1

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1822440	500	38	20 (3/4")	12	PCS	
1822442	800	50	20 (3/4")	12	PCS	



SPXFLOW
Johnson Pump



Johnson Automatic Heavy Duty Combo Bilge Pumps

Johnson Heavy Duty great capacity and long life submersible bilge pumps. Designed and built with great reliability and long life materials. Available with a pre-wired Ultima Switch.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1822019	1600	100	28/32	12	PCS	
1822020	1600	100	28/32	24	PCS	
1822028	2200	130	28/32	12	PCS	
1822030	2200	130	28/32	24	PCS	



SPXFLOW
Johnson Pump



Johnson Automatic Ultima Bilge Pumps

Johnson Ultima Bilge automatic submersible bilge pump with built-in level switch. Activates automatically when water is detected in the bilge.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1822416	600	38	19	12	PCS	
1822418	800	51	19	12	PCS	
1822420	1000	64	19	12	PCS	
1822422	1250	79	28/32	12	PCS	



SPXFLOW
Johnson Pump



Attwood Tsunami MK2 Bilge Pump

Attwood Tsunami MK2 submersible bilge pump with removable base and head for easy cleaning. Sealed motor protected from electrolysis damage with X-Air impeller which prevents dry running and air entering exhaust piping. 1" 3/8 (35mm) threaded ports to be completed with straight or elbow adjustable fittings complete with non-return valve.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	Accessories	UM	€
1821805	T500	32	35 (1" 3/8)	12		PCS	
1821808	T800	50	35 (1" 3/8)	12		PCS	
1821812	T1200	76	35 (1" 3/8)	12		PCS	
1821830					20/25 Straight Fitting	PCS	
1821831					20/25 Elbow Fitting	PCS	
1821832					25/28 Straight Fitting	PCS	
1821833					25/28 Elbow Fitting	PCS	



attwood

Attwood HD Bilge Pump

Attwood HD heavy duty submersible bilge pump with 3 YEARS WARRANTY. Stainless Steel motor shaft and moulded seals to prevent infiltrations.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1821817	HD1700	107	30 (1" 1/8)	12	PCS	
1821820	HD2000	126	30 (1" 1/8)	12	PCS	
1821822	HD2000	126	30 (1" 1/8)	24	PCS	



attwood

Ocean HD Bilge Pump

Ocean HD bilge pump for intensive use with shockproof plastic case. Water cooled electric motor with Stainless Steel shaft, double ball bearings and mechanical seal. Complete with non-return valve, compliant with ISO8848 EN55014 Marine. Dimensions 170 x 158 x dia 130 mm.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1820117	1750	110	32-38 (1" 1/4-1" 1/2)	12	PCS	
1820118	1750	110	32-38 (1" 1/4-1" 1/2)	24	PCS	
1820122	2250	140	32-38 (1" 1/4-1" 1/2)	12	PCS	
1820123	2250	140	32-38 (1" 1/4-1" 1/2)	24	PCS	



Ocean

Sahara MK2 Automatic Bilge Pump

Attwood Sahara MK2 submersible bilge pump with integrated float switch and detachable head for easy cleaning. Sealed motor protected from electrolysis damage with X-Air impeller which prevents dry running and air entering exhaust piping. 1" 3/8 (35mm) threaded ports to be completed with straight or elbow adjustable fittings complete with non-return valve.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	Accessories	UM	€
1821855	S500	32	35 (1" 3/8)	12		PCS	
1821857	S750	47	35 (1" 3/8)	12		PCS	
1821861	S1100	69	35 (1" 3/8)	12		PCS	
1821834					20/25 Straight Fitting	PCS	
1821835					20/25 Elbow Fitting	PCS	
1821836					25/28 Straight Fitting	PCS	
1821837					25/28 Elbow Fitting	PCS	



attwood

Ocean Laguna Automatic Bilge Pump

Ocean Laguna automatic bilge pump, activates automatically when water is detected in the bilge. Water cooled electric motor for an increased durability. Filter base can be opened for easy cleaning.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1820105	500 GPH	32	20	12	PCS	
1820107	750 GPH	47	20	12	PCS	
1820111	1100 GPH	69	30	12	PCS	



Ocean

**BW-C Bilge Pump**

BW-C compact submersible bilge pump.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1821005	WB-550	35	20	12	PCS	
1821011	WB-1100	69	30	12	PCS	

**BW-M Bilge Pump**

BW-M medium capacity submersible bilge pump.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1821015	WB-1500	95	30	12	PCS	
1821016	WB-1500	95	30	24	PCS	
1821020	WB-2000	126	30	12	PCS	
1821021	WB-2000	126	30	24	PCS	

**BW-L Bilge Pump**

BW-L big capacity submersible bilge pump.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1821037	WB-3700	233	38	12	PCS	
1821038	WB-3700	233	38	24	PCS	
1821047	WB-4700	297	50	12	PCS	
1821048	WB-4700	297	50	24	PCS	

**BW Automatic Bilge Pump**

BW automatic bilge pump, activates automatically when water is detected in the bilge. Water cooled electric motor for an increased durability. Filter base can be opened for easy cleaning.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1821106	500 GPH	32	20	12	PCS	
1821112	1100 GPH	69	30	12	PCS	
1821122	2000 GPH	126	30	12	PCS	
1821124	2000 GPH	126	30	24	PCS	

**SeaFlo Bilge Pump**

SeaFlo corrosion free components submersible bilge pump. Easy to open and clean. Complete with 19 mm (3/4") fittings kit.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1821203	SF-350-12V	22	20	12	PCS	
1821206	SF-600-12V	38	20	12	PCS	
1821208	SF-800-12V	50	20	12	PCS	



PUMPS

SUBMERSIBLE BILGE PUMPS ACCESSORIES

Interactive QR
with updated information

AA Control Panel

AA control panel with 3 position switch: On - Off - Auto.

Cod.	UM	€
1823027	PCS	



MTM




Fail-Safe Control Panels

3-position control panel: On - Off - Auto.

Cod.	Type	UM	€
1823030	Horizontal	PCS	
1823031	Vertical	PCS	



MTM

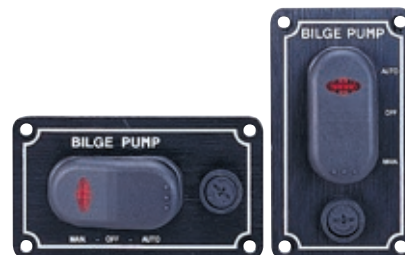

Startech Bilge Pump Switch Panel

UV resistant stabilized Plastic 3-position auto-off-manual bilge pump switch panel. With Nitrile gasket, Stainless Steel screws, 10A circuit breaker and preprinted label.

Cod.	Dim mm	V	UM	€
2102783	60 x 100	12/24	PCS	



MTM



AA Fail-Safe Control Panel

Backlighted switch 12V control panel with 3 positions: Automatic - Off - Manual with the "Fail-safe" device (automatic return to off from manual position).

Cod.	UM	€
1823034	PCS	



MTM



Rule Fail-Safe Control Panel

Backlighted switch control panel with 3 positions: Automatic - Off - Manual with the Rule "fail-safe" device (automatic return to off from manual position).

Cod.	V	UM	€
1823037	12	PCS	
1823038	24	PCS	



rule



Johnson Control Panel

Johnson backlighted switch control panel with 3 positions: Automatic - Off - Manual.

Cod.	V	UM	€
1823023	12	PCS	
1823024	24	PCS	

SPXFLOW
Johnson Pump

Bilge Alarm System

Wear resistant bilge water alarm system equipped with a watertight minisensor without mechanical parts in motion. Dim: 26 x 65 x 5 mm.

Cod.	V	UM	€
1823502	12	PCS	
1823504	24	PCS	

SPXFLOW
Johnson Pump

El-Marine Floating Switch

Bilge pump switch with floating lever.
Universal power supply 6-12-24-32 V.

Cod.	UM	€
1823000	PCS	

**BW Floating Switch**

Bilge pump switch with floating lever.
Universal power supply 6-12-24-32 V.

Cod.	UM	€
1823006	PCS	

**Rule Floating Switch**

Rule Bilge pump switch with floating lever.
Universal power supply 6-12-24-32 V.

Cod.	UM	€
1823606	PCS	

**SPX Johnson Floating Switch**

Johnson Bilge pump switch with floating lever.
Universal power supply 6-12-24-32 V.

Cod.	UM	€
1823005	PCS	

**Attwood Flat Floating Switch**

Attwood extra flat bilge pump switch with floating lever.
Universal 12/24V power supply.

Cod.	UM	€
1823002	PCS	

**El-Marine Cage Floating Switch**

Bilge pump switch with floating lever and guard cover.
Universal power supply 6-12-24-32 V.

Cod.	UM	€
1823004	PCS	

**Attwood S3 Electronic Switch**


Electronic switch that detects any type of liquid in the bilge. Would not expose the pump to continuous cycling because identifies false starts due to splashing water or dirt. Outstanding lifetime with 5 YEARS WARRANTY because built without mechanical parts in motion.

Cod.	A	V	UM	€
1823058	15	12	PCS	

**SPX Johnson Ultima Electronic Switch**

Johnson universal electronic switch for 12/24V bilge pumps. Watertight, wear resistant, without mechanical parts in motion. Dim: 85 x 67 x 29 mm

Cod.	A	V	UM	€
1823515	20	12/24	PCS	

**SPX Johnson Electronic Float Switch**

Very reliable bilge pump switch with solid state electronic combination and sealed float switch. Equipped with false start prevention system, no mercury, shockproof polymer construction with sealed electronics.

Cod.	A	V	UM	€
1822455	15	12	PCS	
1822456	8	24	PCS	

**Quick Electronic Switches**

Electronic switch for bilge pumps without mechanical parts in motion. It detects the presence of water avoiding false switch-on/off. Can be manually activated from remote switch. Universal 12/24V power supply. IP68 protection.

Cod.	A	Dimensions mm	UM	€
1823010	10	75 x 90 x 38	PCS	
1823015	15	75 x 90 x 38	PCS	
1823020	20	75 x 90 x 38	PCS	





Johnson Live Well Aerating Pumps

Johnson live well aerating pumps with straight and elbowed connection. Great power and reliability, built for a long life. Easily removable for cleaning.



Cod.	Ref	Dip Tube	Capacity Lt/min	Port ø mm	V	UM	€
1822825	500	Straight	32	19	12	PCS	
1822835	500	Elbowed	32	19	12	PCS	
1822828	750	Straight	47	19	12	PCS	
1822838	750	Elbowed	47	19	12	PCS	



SPXFLOW
Johnson Pump

SeaFlo Live Well Aerating Pumps

SeaFlo live well aerating pumps with straight and elbow connection. Easily removable for cleaning.

Cod.	Ref	Dip Tube	Capacity Lt/min	Port ø mm	V	UM	€
1821227	SF-G800	Straight	50	19	12	PCS	
1821229	SF-G800	Elbowed	50	19	12	PCS	



SEAFLO

Attwood Tsunami MK2 Bilge Pump

Attwood Tsunami MK2 submersible bilge pump with removable base and head for easy cleaning. Sealed motor protected from electrolysis damage with X-Air impeller which prevents dry running and air entering exhaust piping. 1" 3/8 (35mm) threaded ports to be completed with straight or elbow adjustable fittings complete with non-return valve.



Cod.	Ref	Capacity Lt/min	Port ø mm	V	Accessories	UM	€
1821845						PCS	
1821848						PCS	
1821830				20/25	Straight Fitting	PCS	
1821831				20/25	Elbow Fitting	PCS	
1821832				25/28	Straight Fitting	PCS	
1821833				25/28	Elbow Fitting	PCS	



attwood

Attwood Tsunami Recirq Aerating Kit

Attwood Tsunami Recirq aerating kit that allows forced circulation and independent live well water aeration without external drain socket. Includes:

- 1 Tsunami 500GPH pump
- 1 Nozzle
- 1 Stainless Steel filter
- 2 Hose clamps
- 1 Hose 3/4" 0.5 meters
- 1 Pipe-to-hose



Cod.	Ref	Capacity Lt/min	V	UM	€
1821847	T500 Recirq	32	12	PCS	




attwood

Attwood Aerating Pumps Accessories and Spare Parts

Accessories and spare parts for Attwood aerating systems. Mount brackets allows to mount aerating pump on the base. Nozzles are adjustable with 90° elbow. The drain socket with filter prevents aerating pump obstruction. Maximum bulkhead thickness 45 mm.



Cod.	Ref	UM	€
1821884	3/4" Mount Bracket	PCS	
1821880	3/4" Drain Socket with Filter	PCS	
1821881	Plastic Filter for 3/4" Drain Socket	PCS	
1821885	3/4" Nozzle	PCS	

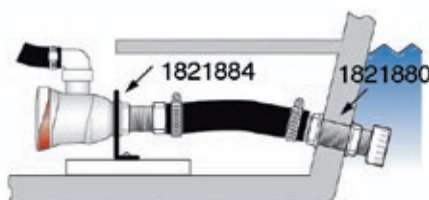

attwood

Portable Johnson Live Well Aerating Kit

Johnson portable live well aerating kit. Complete with all mount accessories.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1822852	450	28	19	12	PCS	



Johnson In-Well Aerator Kit

Johnson portable live well aerating kit. Complete with all mount accessories.

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1822850	500	40	19	12	PCS	



Rule Aerating Pump

Rule live well aerating pump with double outlet for optional wash connection. Swivel body to facilitate connections and removable cartridge for easy cleaning.

Exhaust port:

1821640: 3/4" threaded with 20 mm straight and angled pipe-to hose

1821642: 1" 1/8 threaded with 30 mm straight and angled pipe-to hose

Second wash port: 1/2" NPT threaded

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1821640	800-403FC	50	20 (3/4" NPT)	12	PCS	
1821642	1100-405FC	70	20 (3/4" NPT)	12	PCS	



Rule Tournament Aerating Pump

Large capacity Rule live well aerating pump for sport fishing. With double outlet for optional wash connection, charged Nylon base and heavy-duty motor that ensures years of service.

Exhaust port: pipe-to-hose 28 mm (1" 1/8)

Second wash port: 1/2" NPT threaded

Cod.	Ref	Capacity Lt/min	Port ø mm	V	UM	€
1821680	1600-209FDP	100	25 (1" NPT)	12	PCS	



Johnson Aqua Jet Deck Wash Pump

Aqua Jet pump complete with pistol nozzle and hose connection. For washing decks, tenders, bilges, cars etc.

Cod.	Ref	Lt/h	V	UM	€
1825902	Aqua Jet 3.5	820	12	PCS	
1825904	Aqua Jet 3.5	820	24	PCS	
1825908	Aqua Jet 5.2	1180	12	PCS	
1825909	Aqua Jet 5.2	1180	24	PCS	

**Johnson Aqua Jet Deck Wash Pump Kit 3.5**

Aqua Jet 3.5 pump kit complete with pistol nozzle, hoses, control panel and accessories. For washing decks, tenders, bilges, cars etc.

Cod.	Ref	Lt/h	UM	€
1825901		820	PCS	

**Johnson Aqua Jet Deck Wash Pump Kit 5.2**

Aqua Jet 5.2 pump kit complete with pistol nozzle, hoses, control panel and accessories. For washing decks, tenders, bilges, cars etc.

Cod.	Ref	Lt/h	UM	€
1825905		1180	PCS	
1825906		1180	PCS	

**SeaFlo Washdown 75 Deck Wash Pump Kit**

SeaFlo pump kit complete with pistol nozzle, hoses and accessories. For washing decks, tenders, bilges, cars etc.

Cod.	Lt/h	V	UM	€
1825912	740	12	PCS	

**SeaFlo Washdown 115 Deck Wash Pump Kit**

SeaFlo pump kit complete with pistol nozzle, hoses and accessories. For washing decks, tenders, bilges, cars etc.

Cod.	Lt/h	V	UM	€
1825913	1140	12	PCS	
1825914	1140	24	PCS	



Johnson Self-Priming Pumps

Johnson Nitrile impeller and Brass head multipurpose self-priming pumps. For fresh water, salt water, oil or diesel pouring and bilge pumping.

SPXFLOW
Johnson Pump

Cod.	Lt/min	ø Ports Int" - Ext mm	Dim mm	V	Spare	UM	€
1825802	22	3/8 - 20	170 x 100 x 82	12		PCS	
1825803	22	3/8 - 20	170 x 100 x 82	24		PCS	
1825805	36	1/2 - 25	180 x 120 x 90	12		PCS	
1825806	36	1/2 - 25	180 x 120 x 90	24		PCS	
1825812	50	1/2 - 25	202 x 120 x 90	12		PCS	
1825814	50	1/2 - 25	202 x 120 x 90	24		PCS	
1816134					1825802 Impeller	PCS	
1816135					1825805/06/12/14 Impeller	PCS	
1825852					1825802 Service kit	PCS	
1825855					1825805/06 Service Kit	PCS	

**Jabco Water Puppy 2000 Self-Priming Pump**

Jabco Nitrile impeller and Brass pump head self-priming pump. For fresh water, salt water and bilge pumping.



JABSCO

Cod.	Lt/min	ø Ports Int" - Ext mm	Dim mm	V	Spare	UM	€
1825700	32	1/2 - 25	194 x 86 x 89	12		PCS	
1825724	32	1/2 - 25	194 x 86 x 89	24		PCS	
1815135					Impeller	PCS	

**Ocean Deck Self-Priming PL Pumps**

Ocean Nitrile impeller and Thermo-Polymer pump head self-priming pump. For fresh water, salt water and bilge pumping.



Ocean

Cod.	Lt/min	ø Ports Int" - Ext mm	Dim mm	V	Spare Parts	UM	€
1825501	32	1/2 - 21	160 x 120 x 80	12		PCS	
1814135					Impeller	PCS	

**Ocean Deck Self-Priming Pumps**

Ocean Nitrile impeller and Brass pump head self-priming pump. For fresh water, salt water and bilge pumping.



Ocean

Cod.	Lt/min	ø Ports Int" - Ext mm	Dim mm	V	Spare Parts	UM	€
1825500	32	1/2	160 x 120 x 80	12		PCS	
1825600	45	1/2 - 25	180 x 120 x 80	12		PCS	
1825624	45	1/2 - 25	180 x 120 x 80	24		PCS	
1814135					Impeller	PCS	

**Marco Self-Priming Pumps**

Marco UP1 Nitrile impeller and Chromed Brass head self-priming pumps. Waterproof casing and watertight wire seal. For fresh water, salt water and bilge pumping.



MARCO

Cod.	Ref	Lt/min	ø Ports Int" - Ext mm	Dim mm	V	Spare Parts	UM	€
1825400	UP1-J	28	3/8 - 20	152 x 95 x 82	12		PCS	
1825401	UP1-N	35	1/2 - 25	179 x 120 x 94	12		PCS	
1825402	UP1-N	35	1/2 - 25	179 x 120 x 94	24		PCS	
1825403	UP1-M	45	1/2 - 25	194 x 120 x 98	12		PCS	
1825404	UP1-M	45	1/2 - 25	194 x 120 x 98	24		PCS	
1816133						1825400 Impeller	PCS	
1816135						1825401/02/03/04 Impeller	PCS	



Johnson Viking 16 Self-Priming Pump

SPX Johnson Viking 16 self-priming diaphragm pump easy to install anywhere, can be set up in several different pump/motor configurations. It is used to discharge into the waste water system or as a bilge pump to empty even very dirty bilges.

- Designed to empty waste water and bilges
- Easy to install, even in tight spaces
- Quiet operation
- Easy and low-cost maintenance
- High impact glass fiber reinforced nylon body
- Ball-bearing supported transmission
- Non-choke valves - no filters required
- Self-priming up to 3m (9.8ft)
- Can run dry and can pump air/water mixture
- Robust (single) diaphragm
- Standard KlickTite™ XL connectors
- Low power consumption


SPXFLOW
Johnson Pump


Cod.	Johnson SPX Code	Lt/min	ø Ports mm	Dim mm	V	UM	€
1826032	10-13350-03	16	19 - 25	186 x 235 x H118	12	PCS	
1826034	10-13350-04	16	19 - 25	186 x 235 x H118	24	PCS	

Johnson Viking 32 Self-Priming Pump

SPX Johnson Viking 32 heavy duty self-priming diaphragm pump. Easy to install anywhere, thanks to the 360° rotatable pump head it can be set up in several different pump/motor configurations. It is used as a bilge pump to empty even very dirty bilges. Thanks to its single-chamber design and non-choke valves, the Viking Power 32, can be used to pump un-macerated sewage to a holding tank or transfer it onwards to a septic tank.

- Maximum flow 32 Lt/min
- Designed to empty waste water and bilges
- Easy to install, even in tight spaces
- Quiet operation
- Easy and low-cost maintenance
- High impact glass fiber reinforced nylon body
- Ball-bearing supported transmission
- Non-choke valves - no filters required
- Self-priming up to 2, m (8.2ft)
- Can run dry and can pump air/water mixture
- Robust (single) diaphragm


SPXFLOW
Johnson Pump


Cod.	Johnson SPX Code	Lt/min	ø Ports mm	Dim mm	V	UM	€
1826036	10-13373-03	32	38	277 x 264 x H192	12	PCS	
1826038	10-13373-04	32	38	277 x 264 x H192	24	PCS	

Jabco Shower/Bilge Drain Self-Priming Pump

Robust Jabco diaphragm pump, self-priming up to a height of 3m. For shower, grey water and bilge drain. Quiet running, filter-less, compact design and flexible installation with multi-positional head.


JABSCO

Cod.	Lt/min	ø Ports mm	Dim mm	V	UM	€
1825732	16	19 (3/4")	150 x 297 x H111	12	PCS	
1825734	16	19 (3/4")	150 x 297 x H111	24	PCS	

**Ocean Vertical Self-Priming Pump**

Ocean diaphragm self-priming pump. For fresh water, salt water and bilge pumping.


Ocean
Pumps & Hydraulics

Cod.	Lt/min	ø Ports mm	Dim mm	V	UM	€
1826010	20	19 (3/4")	170 x 140 x H150	12	PCS	
1826024	20	19 (3/4")	170 x 140 x H150	24	PCS	

**Ocean Grey Drain Pump**

Up to a 3m height self priming Ocean diaphragm pump with double non-return valve. Thanks to its compact design and 360° rotating head it is perfect for shower or sink drain and for general grey water applications. Quiet running, it can run dry, does not require filter. Available models: in-line or angled for tight spaces.


Ocean
Pumps & Hydraulics

Cod.	Pump Type	Lt/min	ø Ports mm	Dim mm	V	UM	€
1826012	Inline	20	19 - 25	305 x 195 x H125	12	PCS	
1826016	Inline	20	19 - 25	305 x 195 x H125	24	PCS	
1826011	Angled	20	19 - 25	190 x 245 x H125	12	PCS	
1826013	Angled	20	19 - 25	190 x 245 x H125	24	PCS	



CMG 52/75 Centrifugal Pump

Bronze head and impeller self-priming large capacity liquid ring pump with permanent magnet motor. For sea water pumping, bilge cleaning and diesel pouring.

Cod.	Lt/min	Max Vertical Lift m	ø Ports mm	V	UM	€
1826512	52	12	25 (1")	12	PCS	
1826524	52	12	25 (1")	24	PCS	
1826624	75	18	30 (1" 1/4)	24	PCS	

**CMG PB Centrifugal Pump**

Bronze impeller peripheral pump able to produce high pressure. For cleaning decks, chains, for fresh and salt water and for bilge cleaning. Requires check valve.

Cod.	Lt/min	Max Vertical Lift m	ø Ports mm	V	UM	€
1826712	35	40	25 (1")	12	PCS	
1826724	36	42	25 (1")	24	PCS	

**CMG Inox Centrifugal Pump**

Stainless Steel self-priming centrifugal pump with Noryl impeller. Delivers pressurized water to on-board appliances or air conditioning units. To be used only with fresh water. Requires check valve.

Cod.	Lt/min	Max Vertical Lift m	ø Ports mm	V	UM	€
1826912	50	30	25 (1")	12	PCS	
1826924	50	38	25 (1")	24	PCS	
1826944	90	50	25 (1")	24	PCS	

**- WATER CIRCULATION PUMPS -****Johnson CM Circulation Pump**

IP67 watertight centrifugal pump for inlet and continuous circulation of fresh water and water-Glycol mixture (max 60%) in cooling systems. Permanent magnet, ball bearing mounted motor designed for continuous operation. Liquid temperature Min -40° Max +100°.

Cod.	Lt/min	ø Ports mm	Dim mm	A	V	UM	€
1850222	15	16 (5/8") - 20 (3/4")	177 x 68 x 85	1,2	12	PCS	
1850224	15	16 (5/8") - 20 (3/4")	177 x 68 x 85	0,6	24	PCS	
1850226	26	20 (3/4")	177 x 68 x 85	2,2	12	PCS	
1850228	26	20 (3/4")	177 x 68 x 85	1,1	24	PCS	

**Johnson C090 Circulation Pump**

Centrifugal pump for inlet and continuous circulation of fresh water and water-Glycol mixture (max 60%) in cooling systems. Permanent magnet, ball bearing mounted motor designed for continuous operation. Liquid temperature Min -30° Max +100°.

Cod.	Lt/min	ø Ports mm	Dim mm	V	UM	€
1850252	100	38 (1" 1/2')	211 x 117 x 110	12	PCS	
1850254	100	38 (1" 1/2')	211 x 117 x 110	24	PCS	

**ColFlo Circulation Pump**

Water circulation pump for inlet and continuous circulation of water in cooling systems, air conditioning and heat exchangers. Silent, low consumption, with permanent magnet ball bearing mounted motor designed for continuous duty.

Cod.	Lt/min	ø Ports mm	Dim mm	A	V	UM	€
1850212	6	12,7 (1/2")	200 x 105 x 95	1,2	12	PCS	
1850214	6	12,7 (1/2")	200 x 105 x 95	0,6	24	PCS	



UP3/6 Diesel Transfer Pump

Bronze gear pump for diesel transfer complete with filter.

1826314 with 2 pcs 3/8" x 13 mm pipe-to-hose

1826328/29 with 2 pcs 1/2" x 14 mm pipe-to-hose

Cod.	Lt/min	Ø Ports	Dim mm	V	UM	€
1826314	15	3/8"	159 x 166 x H101	12	PCS	
1826328	26	1/2"	199 x 174 x H108	12	PCS	
1826329	26	1/2"	199 x 174 x H108	24	PCS	



MARCO

**VP45 Diesel Transfer Pump**

Aluminum body and Acetal Resin impeller self-priming pump for diesel transfer and refueling. Complete with filter, non-return valve, switch, battery clamps and case with handle for easy transport.

Cod.	Lt/min	Ports Ø mm	Dim mm	V	UM	€
1826345	45	25	210 x 120 x H166	12	PCS	
1826346	45	25	210 x 120 x H166	24	PCS	



MARCO

**UP3/9 Oil Draining Pump**

Bronze gear pump for extracting and emptying oil from engine oil pan.

1826214 with 2 pcs 3/8" x 13 mm pipe-to-hose + fittings for 6 and 8 mm hoses

1826228/29 with 2 pcs 1/2" x 14 mm pipe-to-hose + fittings for 6 and 8 mm hoses

Cod.	Lt/min	Ø Ports	Dim mm	V	Accessories	UM	€
1826214	6	3/8"	135 x 99 x H88	12		PCS	
1826228	8	1/2"	166 x 99 x H94	12		PCS	
1826229	8	1/2"	166 x 99 x H94	24		PCS	
1826230					Ø 6/8 mm Oil Tubing Kit	PCS	



MARCO

**Marco UP8-RE Electronic Oil Pump**

Electronic gear pump ideal for oil and diesel transfer. Integrated control panel to reverse the flow direction and to manually fine tune the flow rate. The flow rate is also automatically adjusted according to the viscosity of the fluid to avoid cavitation.

Cod.	Lt/min	Ø Ports	Dim mm	V	UM	€
1826233	10	3/8"	185 x 114 x H89	12/24	PCS	



MARCO

**F2P10-19 Pump**

High quality multifunction self-priming pump. Ideal for pumping water, oils and chemicals. PA body.

Cod.	Ref	Impeller	Dim mm	Connection	UM	€
1825808	F2P10-19 12V 09-1077B-9	172 x 117 x H78 for hose 1/2" / 12 mm			PCS	
1825809	F2P10-19 24V 09-1077B-9	172 x 117 x H78 for hose 1/2" / 12 mm			PCS	

SPXFLOW
Johnson Pump**Johnson F3B-19 Transfer/Draining Pump**

Johnson F3B-19 Bronze body pump with Nitrile impeller. Endowed with watertight switch with functions: oil extraction - stop - oil injection.

Cod.	Ref	Lt/min	Ports Ø	Dim mm	V	UM	€
1826210	F3B-19 12V	21	3/8"	170 x 100 x H110	12	PCS	
1826212	F3B-19 24V	21	3/8"	170 x 100 x H110	24	PCS	

SPXFLOW
Johnson Pump

Ocean Oil/Diesel Transfer/Draining Pump

Compact self-priming pump with PTFE gears suitable also for continuous duty. Reversible flow direction, does not require filter, can run even dry. For oil, diesel, water or any viscous liquid transfer.

Cod.	Lt/min	ø Ports mm	Dim mm	V UM	€
1826312	12	13 (3/8")	140 x 90	12 PCS	

**Ocean Oil/Diesel Transfer/Draining Pump Kit**

Compact self-priming pump with PTFE gears suitable also for continuous duty. Reversible flow direction, does not require filter, can run even dry. For oil, diesel, water or any viscous liquid transfer. Complete with 2 hoses (6 and 8 mm), 180 cm cable with clamps and fuse.

Cod.	Lt/min	ø Ports mm	Dim mm	V UM	€
1826222	12	13 (3/8")	140 x 90	12 PCS	

**- OIL TRANSFER MANUAL PUMPS -****BG Engine Oil Sump Pump**

Manual engine oil Brass sump pump with Rubber ports and tubing.

Cod.	L mm	UM	€
1835103	230	PCS	

**RG Engine Oil Sump Pump**

Superior quality manual engine oil turned Brass sump pump.

Cod.	L mm	Pipe-to-Hose ø	UM	€
1835100	255	3/4"	PCS	
1835110	335	1"	PCS	

**Outboard and Sterndrive Oil Change Pump**

Manual oil Brass change pump for any outboard or sterndrive with 16 (3/8") drain screw. Perfect for use with 946 ml oil bottles, complete with Yamaha adaptor.

Cod.	L mm	UM	€
1835108	150	PCS	

**Fuel Transferring Bellows Pump**

Fuel transferring bellows pump with non return valve and faucet.

Cod.	UM	€
1835115	PCS	

**Oilbox Profi Oil Suction Pump**


Professional quality oil change pump. Sturdy transparent tank with full level automatic block valve. Complete with ports and 3 tubes diameter 5.8/6.7/9.8 mm with their respective lengths 85/85/100 cm.

Cod.	H mm	ø mm	Capacity Lt	UM	€
1835124	496	180	4	PCS	
1835127	660	185	6,5	PCS	
1835129	590	220	10,5	PCS	




Foot Pump

Foot pump for sinks.

Cod.	Lt/min	ø Ports mm	UM	€	
1830000	9	14	PCS		


**Bi-Foot Pump**

Double action foot pump for sinks.

Cod.	Lt/min	ø Ports mm	UM	€	
1830002	16	14	PCS		


**In-Line Centrifugal Pump**

No self-priming in-line centrifugal pump.

Cod.	Lt /min	ø Ports mm	Dim mm	V	UM	€	
1825000	12	13	ø 45 x H110	12	PCS		


**Submersible Centrifugal Pump**


No self-priming submersible centrifugal water pump. For tanks with tight inlets.

Cod.	Lt /min	ø Ports mm	Dim mm	V	UM	€	
1825200	9	10	ø 36 x H105	12	PCS		
1825201	15	10/12	ø 49 x H115	12	PCS		


**- ACCESSORIES FOR WATER SYSTEM PUMPS -****AA Accumulator Tank**

AA fresh water accumulator tank for freshwater pressure systems. Capacity: 1 Lt.

Cod.	ø mm	L mm	ø Ports	UM	€	
1827500	95	250	3/8"	PCS		

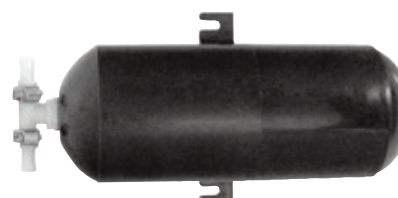**SeaFlo Accumulator Tank**

SeaFlo fresh water accumulator tank for freshwater pressure systems. Capacity 0.75 Lt, pre-charged to 0.7 bar.


Cod.	ø mm	L mm	ø Ports	UM	€	
1827503	105	200	1/2"	PCS		



SEAFLO

Johnson Accumulator Tank

Johnson fresh water accumulator tank for freshwater pressure systems. Capacity 2 Lt, pre-charged to 0.8 bar.

Cod.	ø mm	L mm	ø Ports	UM	€	
1827502	160	315	3/4"	PCS		

SPXFLOW
Johnson Pump

SeaFlo Mini Freshwater Pressure Pump

SeaFlo Mini freshwater pressure pump for one sink utility.

Cod.	Lt /min	Ports ø	Dim mm	V	UM	€
1827104	3,8	3/8"	169 x 98 x H62	12	PCS	



SEAFLO

**Flojet Triplex Freshwater Pressure Pumps**

Flojet Triplex freshwater pressure pumps for sinks and showers, from 1 to 3 utilities.

Cod.	Ref	Lt/min	Ports ø	Dim mm	V	Spare Parts	UM	€
1827106	Triplex 2.0 25PSI	7	1/2"	208 x 160 x H95	12		PCS	
1827112	Triplex 2.9 25PSI	11	1/2"	208 x 160 x H95	12		PCS	
1827124	Triplex 2.9 25PSI	11	1/2"	208 x 160 x H95	24		PCS	
1827126	Triplex 2.9 40PSI	11	1/2"	208 x 160 x H95	24		PCS	
1827152						Pressure Switch 25PSI	PCS	
1827154						Pressure Switch 40PSI	PCS	



FLOJET

**Jabco Par-Max HD Freshwater Pressure Pump**

Jabco Par-Max HD freshwater pressure pump for sinks and showers, from 2 to 4 utilities. Self-priming up to 2 meters, with permanent magnet motor and bypass system that guarantees constant flow and silence. Complete with filter and snap fittings.

Cod.	Ref	Lt/min	Ports ø	Dim mm	V	Spare Parts	UM	€
1827001	Par-Max HD3 40PSI	11	12 (1/2")	218 x 104 x H97	12		PCS	
1827002	Par-Max HD4 40PSI	15	12 (1/2")	239 x 104 x H97	12		PCS	
1827004	Par-Max HD4 40PSI	15	12 (1/2")	239 x 104 x H97	24		PCS	
1827008	Par-Max HD6 40PSI	23	19 (3/4")	259 x 129 x H119	12		PCS	
1827009	Par-Max HD6 40PSI	23	19 (3/4")	259 x 129 x H119	24		PCS	
1827052						Pressure Switch 40 PSI	PCS	
1827053						Pressure Switch 60 PSI	PCS	



JABSCO

**ColFlo Triplex Freshwater Pressure Pumps**

Diaphragm up to 2.7 meters self-priming ColFlo freshwater pressure pumps for sinks and showers, from 1 to 3 utilities. Complete with strainer, 3/4" threaded click fittings and 14 mm pipe-to-hose click fittings.

Cod.	Ref	Lt /min	Ports ø	Dim mm	V	Spare Parts	UM	€
1827107	Midi-8	8	19 (3/4")	232 x 104 x H110	12		PCS	
1827108	Midi-11	11	19 (3/4")	232 x 104 x H110	12		PCS	
1827109	Midi-11	11	19 (3/4")	232 x 104 x H110	24		PCS	
1827190						Midi-8/11 Pressure Switch	PCS	



MTM

**ColFlo Quad Freshwater Pressure Pumps**

Diaphragm up to 2.4 meters self-priming ColFlo freshwater pressure pumps for sinks and showers, from 2 to 4 utilities. Complete with strainer, 3/4" threaded click fittings and 14 mm pipe-to-hose click fittings (Midi) (20 mm Maxi).

Cod.	Ref	Lt /min	Ports ø	Dim mm	V	Spare Parts	UM	€
1827110	Midi-10	10	19 (3/4")	213 x 106 x H95	12		PCS	
1827111	Midi-12	12,5	19 (3/4")	213 x 106 x H95	12		PCS	
1827118	Maxi-17	17	19 (3/4")	250 x 110 x H98	12		PCS	
1827119	Maxi-17	17	19 (3/4")	250 x 110 x H98	24		PCS	
1827170						Midi-10 Pressure Switch	PCS	
1827171						Midi-12 Pressure Switch	PCS	
1827178						Maxi-17 Pressure Switch	PCS	
1827180						Diaphragm	PCS	



MTM



2.4/2.9 Johnson Aqua Jet Freshwater Pressure Pumps

Johnson Aqua Jet freshwater pressure pumps for sinks and showers, from 1 to 3 utilities. Quiet and reliable, assures years of service.

Cod.	Ref	Lt/min	Ports ø	Dim mm	V	Spare Parts	UM	€
1827207	Aqua Jet 2.4	9	1/2"	200 x 197 x H110	12		PCS	
1827208	Aqua Jet 2.4	9	1/2"	200 x 197 x H110	24		PCS	
1827209	Aqua Jet 2.9	11	1/2"	200 x 197 x H110	12		PCS	
1827210	Aqua Jet 2.9	11	1/2"	200 x 197 x H110	24		PCS	
1827282						Aqua Jet 2.4/2.9 Switch	PCS	


SPXFLOW
Johnson Pump
3.5/4.0/5.2 Johnson Aqua Jet Freshwater Pressure Pumps

Johnson Aqua Jet freshwater pressure pumps for sinks and showers, from 2 to 4 utilities. Quiet and reliable, assures years of service.

Cod.	Ref	Lt/min	Ports ø	Dim mm	V	Spare Parts	UM	€
1827213	Aqua Jet 3.5	13	1/2"	237 x 210 x H116	12		PCS	
1827214	Aqua Jet 3.5	13	1/2"	237 x 210 x H116	24		PCS	
1827216	Aqua Jet 4.0	15	1/2"	240 x 214 x H110	12		PCS	
1827217	Aqua Jet 4.0	15	1/2"	240 x 214 x H110	24		PCS	
1827219	Aqua Jet 5.2	20	1/2"	240 x 214 x H110	12		PCS	
1827220	Aqua Jet 5.2	20	1/2"	240 x 214 x H110	24		PCS	
1827283						Aqua Jet 3.5 Switch	PCS	
1827285						Aqua Jet 4.0/5.2 Switch	PCS	


SPXFLOW
Johnson Pump
5.0 Flow Master Johnson Aqua Jet Freshwater Pressure Pumps


Johnson Aqua Jet Flow Master freshwater pressure pumps for sinks and showers, from 2 to 4 utilities. Endowed with electronic control variable flow which ensures constant water pressure even without accumulator tank. Quiet and reliable, assures years of service.

Cod.	Ref	Lt/min	Ports ø	Dim mm	V	UM	€
1827222	Aqua Jet 5.0 Flow Master	19	1/2"	240 x 210 x H113	12	PCS	
1827224	Aqua Jet 5.0 Flow Master	19	1/2"	240 x 210 x H113	24	PCS	


SPXFLOW
Johnson Pump
Marco Freshwater Pressure Electronic Pumps

Marco electronic control freshwater pressure pumps complete with non-return valve. The electronic control guarantees: optimization of electrical draw, constant control of pressure with no need of an accumulator tank, automatic stop in case of no liquid and reduced components wear which increases the system life. Suitable for both fresh and salt water. Universal 12/24V power supply.

Cod.	Ref	Lt/min	Ports ø	Dim mm	V	UM	€
1827022	UP3/E	15	3/8"	186 x 172 x H101	12/24	PCS	
1827030	UP6/E	26	1/2"	226 x 212 x H101	12/24	PCS	
1827031	UP12/E	36	1/2"	242 x 212 x H113	12/24	PCS	


MARCO
Marco Freshwater Pressure Electronic Pump UP14/E

Marco electronic control freshwater pressure pump complete with non-return valve and PCS control panel that allows remote monitoring and interaction with the pump. The electronic control guarantees: optimization of electrical draw, constant control of pressure with no need of an accumulator tank, automatic stop in case of no liquid and reduced components wear which increases the system life. Suitable for both fresh and salt water. Universal 12/24V power supply.

Cod.	Ref	Lt/min	Ports ø	Dim mm	V	UM	€
1827033	UP14/E	46	3/4"	256 x 225 x H119	12/24	PCS	


MARCO

**Aqua Jet Uno Freshwater Pressure System**

Johnson Aqua Jet Uno freshwater pressure system with accumulator tank for sinks and showers, from 2 up to 4 utilities for boats from 10 to 16 m. Quiet and reliable, assures years of service.



Cod.	Lt/min	ø Ports	Dim mm	V	Tank	UM	€
1827259	20	3/4"	330 x 300 x H350	12	2 Lt	PCS	
1827260	20	3/4"	330 x 300 x H350	24	2 Lt	PCS	

**Aqua Jet Duo Freshwater Pressure System**

Johnson Aqua Jet Duo freshwater pressure system with accumulator tank for sinks and showers, from 3 up to 6 utilities for boats from 12 to 19 m. Quiet and reliable, assures years of service.



Cod.	Lt/min	ø Ports	Dim mm	V	Tank	UM	€
1827262	40	3/4"	330 x 300 x H450	12	2 Lt	PCS	
1827264	40	3/4"	330 x 300 x H450	24	2 Lt	PCS	


**PB/2X Freshwater Pressure System**

Freshwater pressure system with Stainless Steel accumulator tank for boats from 10 to 20 m.

Bronze pump and impeller.



Cod.	Lt/min	ø Ports mm	Dim mm	V	Pressure	Tank	UM	€
1827712	35	25 (1")	295 x 205 x H260	12	4 Bar	2 Lt	PCS	
1827724	36	25 (1")	295 x 205 x H260	24	4,2 Bar	2 Lt	PCS	

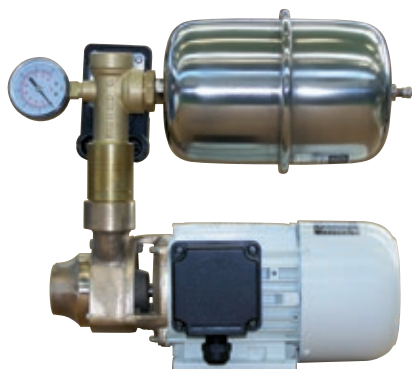**J-Inox/8X Freshwater Pressure System**

Freshwater pressure system with Stainless Steel accumulator tank for boats from 14 to 25 m.

Stainless Steel pump and Noryl technopolymer impeller.



Cod.	Lt/min	ø Ports mm	Dim mm	V	Pressure	Tank	UM	€
1827916	50	25 (1")	450 x 225 x H425	12	3 Bar	8 Lt	PCS	
1827928	50	25 (1")	450 x 225 x H425	24	3,8 Bar	8 Lt	PCS	

**J-Inox/20X Freshwater Pressure System**

Freshwater pressure system with Stainless Steel accumulator tank for boats from 15 to 30 m.

Stainless Steel pump and Noryl technopolymer impeller.



Cod.	Lt/min	ø Ports mm	Dim mm	V	Pressure	Tank	UM	€
1827924	50	25 (1")	440 x 260 x H570	12	3 Bar	20 Lt	PCS	
1827944	50	25 (1")	440 x 260 x H570	24	3,8 Bar	20 Lt	PCS	

**MG-Inox/20X Freshwater Pressure System**

Freshwater pressure system with Stainless Steel accumulator tank for boats from 18 to 35 m.

Stainless Steel pump and Noryl technopolymer impeller.



Cod.	Lt/min	ø Ports mm	Dim mm	V	Pressure	Tank	UM	€
1827948	90	25 (1")	507 x 260 x H570	24	5 Bar	20 Lt	PCS	



Marco Double Electronic Freshwater Pump

Marco electronic control double freshwater pump complete with double PCS control panel that allows remote monitoring and interaction with the pump. The electronic control guarantees: optimization of electrical draw, decrease of noise, constant control of pressure with no need of an accumulator tank, automatic stop in case of no liquid and reduced components wear which increases the system life. Suitable for both fresh and salt water. Universal 12/24V power supply.

Cod.	Ref	Lt/min	Ports ø	Dim mm	V	UM	€
1827040	UP66/E-DX	66	3/4"	301 x 259 x H230	12/24	PCS	



MARCO

Inox/EPC Electronic Freshwater Pressure System

EPC (Electronic Pressure Control) freshwater pressure system with automatic start and stop control. The pump stops working in absence of water and starts working when water is detected again. For boats from 16 to 24 meters. Stainless Steel pump and impeller.

Cod.	Lt/min	ø Ports mm	Dim mm	V	Pressure	UM	€
1827952	50	25 (1")	450 x 185 x H375	12	3.0 Bar	PCS	
1827954	50	25 (1")	450 x 185 x H375	24	3.8 Bar	PCS	
1827958	90	25 (1")	450 x 185 x H375	24	5.0 Bar	PCS	



Cem

PB/EPC Electronic Freshwater Pressure System

EPC (Electronic Pressure Control) freshwater pressure system with automatic start and stop control. The pump stops working in absence of water and starts working when water is detected again. For boats from 13 to 25 meters. Bronze pump and impeller. For both fresh and salt water.

Cod.	Lt/min	ø Ports mm	Dim mm	V	Pressure	UM	€
1827732	35	25 (1")	345 x 160 x H255	12	4.0 Bar	PCS	
1827734	36	25 (1")	345 x 160 x H255	24	4.2 Bar	PCS	



Cem

JBR/EPC Electronic Freshwater Pressure System

EPC (Electronic Pressure Control) freshwater pressure system with automatic start and stop control. The pump stops working in absence of water and starts working when water is detected again. For boats from 13 to 25 meters. Bronze pump and impeller. For both fresh and salt water.

Cod.	Lt/min	ø Ports mm	Dim mm	V	Pressure	UM	€
1827754	55	25 (1")	480 x 185 x H355	24	3.6 Bar	PCS	



Cem

I Series Pulley Pump

Brass impeller and pump with Stainless Steel shaft.

Max 2900 RPM. Max lift 65 m at 1400 RPM.

For fresh and salt water.

Cod.	Lt/min	ø Ports mm	H mm	L mm	W mm	Weight Kg	UM	€
1828029	166	30	180	158	298	6.4	PCS	
1828039	258	40	180	158	304	7.1	PCS	

**IFM Series Pulley Clutch Pump**

Brass impeller and pump with Stainless Steel shaft and manual clutch.

Max 2900 RPM. Max lift 65 m at 1400 RPM.

For fresh and salt water.

Cod.	Lt/min	ø Ports mm	H mm	L mm	W mm	Weight Kg	UM	€
1828030	166	30	180	158	350	10.0	PCS	
1828040	258	40	180	158	350	10.7	PCS	

**IFE Series Pulley Magnetic Clutch Pump**

Brass impeller and pump with Stainless Steel shaft and electromagnetic clutch.

Max 2900 RPM. Max lift 65 m at 1400 RPM.

For fresh and salt water.

Cod.	Lt/min	ø Ports mm	V	H mm	L mm	W mm	Weight Kg	UM	€
1828025	97	25	12	146	126	212	5,4	PCS	
1828026	97	25	24	146	126	212	5,4	PCS	
1828053	166	30	12	180	158	304	11.3	PCS	
1828054	166	30	24	180	158	304	11.3	PCS	
1828063	258	40	12	180	158	304	12.0	PCS	
1828064	258	40	24	180	158	304	12.0	PCS	

**Nautic Pulley Pump**

Bronze impeller and pump with Stainless Steel shaft.

Vertical lift max 15 m – 1400 RPM.

For fresh and salt water.

Cod.	Lt/min	ø Ports mm	H mm	L mm	Kg	UM	€
1827035	75	30	175	218	5.7	PCS	
1827045	120	40	175	245	7.4	PCS	

**Nautic F Pulley Clutch Pump**

Bronze impeller and pump with Stainless Steel shaft and manual clutch.

Vertical lift max 15 m – 1400 RPM.

For fresh and salt water.

Cod.	Lt/min	ø Ports mm	Weight Kg	UM	€
1828035	75	30	8.8	PCS	
1828045	120	40	10.5	PCS	

**Nautic M Pulley Magnetic Clutch Pump**

Bronze impeller and pump with Stainless Steel shaft and electromagnetic clutch.

Vertical lift max 15 m – 1400 RPM.

For fresh and salt water.

Cod.	Lt/min	ø Ports mm	V	Weight Kg	UM	€
1828530	75	30	12	9.8	PCS	
1828535	75	30	24	9.8	PCS	



Ancor Manual Clutch Pump

100 and 250 Lt/min capacity fresh and salt water manual clutch pumps. Nitrile impeller, Bronze body, Stainless Steel shaft. Max 2000 RPM.




Cod.	Ref	Lt/min	ø Ports	Spare	UM	€
1828010	100L Standard	100	1"		PCS	
1814131				Impeller Replacement	PCS	
1829705				Service Kit	PCS	
1828015	250L Large	250	1" 1/2		PCS	
1814130				Impeller Replacement	PCS	
1829706				Service Kit	PCS	

**ANCOR****Ancor Export Manual Clutch Pump**

200 Lt/min capacity fresh and salt water manual clutch pump. Nitrile impeller, Bronze body, Stainless Steel shaft. Max 2000 RPM.



Cod.	Ref	Lt/min	ø Ports	Spare	UM	€
1828020	200L	200	1" 1/4		PCS	
1814131				Impeller Replacement	PCS	
1829781				Service Kit	PCS	

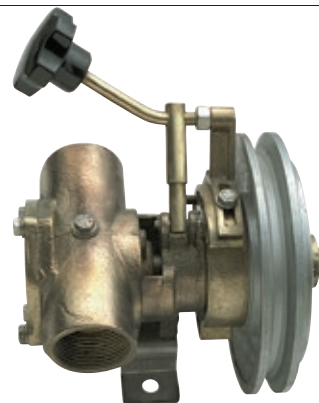**ANCOR****Johnson F7B-5001-1" Magnetic Clutch Pump**

Johnson fresh and salt water pump. Nitrile impeller, Bronze body, Stainless Steel shaft. Max 2000 RPM. Attention: Electromagnetic clutch with pulley sold separately.



Cod.	Lt/min	ø Ports	Clutch	Spare	UM	€
1828251	107	1"			PCS	
1828292			Pulley 12V 2xA		PCS	
1828294			Pulley 24V 2xA		PCS	
1828295			Pulley 12V 1xB		PCS	
1828296			Pulley 24V 1xB		PCS	
1816031			Impeller (Neoprene)		PCS	
1816131			Impeller (Nitrile)		PCS	
1829657			Service Kit		PCS	

**SPXFLOW**
Johnson Pump**Johnson F8B-5001-1.1/2" Magnetic Clutch Pump**

Johnson fresh and salt water pump. Nitrile impeller, Bronze body, Stainless Steel shaft. Max 2000 RPM. Attention: Electromagnetic clutch with pulley sold separately.




Cod.	Lt/min	ø Ports	Clutch	Spare	UM	€
1828252	279	1" 1/2			PCS	
1828292			Pulley 12V 2xA		PCS	
1828294			Pulley 24V 2xA		PCS	
1828295			Pulley 12V 1xB		PCS	
1828296			Pulley 24V 1xB		PCS	
1816060			Impeller (Neoprene)		PCS	
1816160			Impeller (Nitrile)		PCS	
1829608			Service Kit		PCS	

**SPXFLOW**
Johnson Pump**Johnson F9B-5600-2" Magnetic Clutch Pump**

Johnson fresh and salt water pump. Neoprene impeller, Bronze body, Stainless Steel shaft. Max 2000 RPM. Attention: Electromagnetic clutch with pulley sold separately.




Cod.	Lt/min	ø Ports	Clutch	Spare	UM	€
1828255	388	2"			PCS	
1828292			Pulley 12V 2xA		PCS	
1828294			Pulley 24V 2xA		PCS	
1828295			Pulley 12V 1xB		PCS	
1828296			Pulley 24V 1xB		PCS	
1816070			Impeller (Neoprene)		PCS	
1829659			Service Kit		PCS	

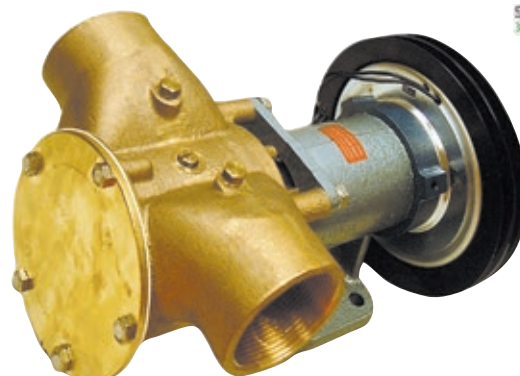**SPXFLOW**
Johnson Pump

SPX Johnson F35B-8 Pump


Bronze body Neoprene impeller cooling pump. Johnson ref 10-24569-01.

Cod.	Lt/min	ø Ports	Spare	UM	€
1829514	20	3/8"		PZ	
1816046			Impeller Replacement	PZ	

**SPX Johnson F4B-8 Pump**


Bronze body Neoprene impeller cooling pump. Johnson ref 10-24570-01.

Cod.	Lt/min	ø Ports	Spare	UM	€
1829538	34	3/8"		PZ	
1816026			Impeller Replacement	PZ	

**SPX Johnson F5B-8 Pump**


Bronze body Neoprene impeller cooling pump. Johnson ref 10-24571-01.

Cod.	Lt/min	ø Ports	Spare	UM	€
1829534	46	3/4"		PZ	
1816032			Impeller Replacement	PZ	

**SPX Johnson F7B-8 Pump**


Bronze body Neoprene impeller cooling pump. Johnson ref 10-24572-01.

Cod.	Lt/min	ø Ports	Spare	UM	€
1829510	107	1"		PZ	
1816031			Impeller Replacement	PZ	

**SPX Johnson F8B-8 Pump**

Bronze body Neoprene impeller cooling pump. Johnson ref 10-13021-01.

Cod.	Lt/min	ø Ports	Spare	UM	€
1829512	279	1" 1/2		PZ	
1816060			Impeller Replacement	PZ	



SPX Johnson F5B-9 Pump (10-13567-01)

Bronze body Neoprene impeller cooling pump.

Johnson ref 10-13567-11

Volvo Penta ref 21214599


Standard assembly production for Volvo Penta engines:

4.3GXl/4.3OSi/5.0GXl/5.0OSi/5.7Gi/5.7GXl/5.7Gi/5.7GXl/5.7OSi/5.7OSXl/5.7GSi

I 3.0GSPBYCCE/3.0GSPEFS/3.0GSMEFS/4.3GLPEFS/4.3GiPEFS

5.0GLPEFS/5.0GiPEFS/5.7GSPEFS/5.7GSiPEFS

Cod.	Lt/min	ø Ports	Spare	UM	€
1829526	46	3/4"		PCS	
1816034			Impeller Replacement	PCS	

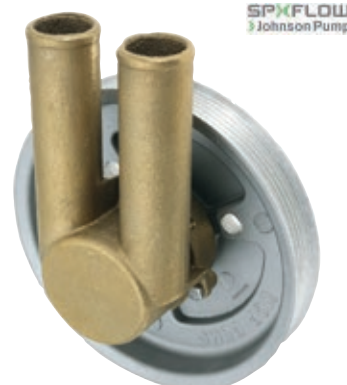**SPX Johnson F6B-9 Pump (10-13569-01)**

Bronze body Neoprene impeller cooling pump.

Johnson ref 10-13569-11

Volvo Penta ref 21212799

Standard assembly production for Volvo Penta engines:

4.3Gi/4.3GXlE/4.3GL/4.3GXl/4.3OSi


5.0GiC/5.0GXl/5.0GXlC/5.0GXlE/5.0GXlE/5.0OSi/5.0GL/5.0OSiE

5.7Gi/5.7Gi/5.7GXl/5.7GiC/5.7GiC/5.7GXlE/5.7GXlE/5.7GXlE/5.7GXl/5.7GXlC

5.7OSi/5.7OSXl/5.7OSiE/5.7OSXlE

V6-200/V6-225/V8-270/V8-300/V8-320/V8-225

Cod.	Lt/min	ø Ports	Spare	UM	€
1829528	127	1"		PCS	
1816043			Impeller Replacement	PCS	

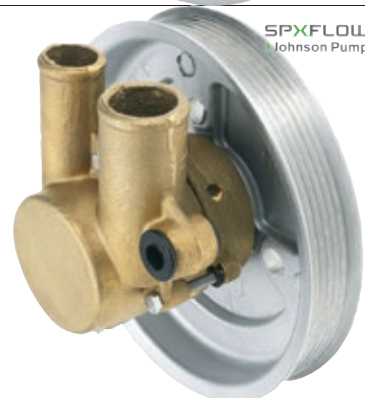**SPX Johnson F6B-9 Pump (10-24515-01)**

Bronze body Neoprene impeller cooling pump.

Johnson ref 10-24515-11

Toyota ref 16860-67010


Nanni Diesel ref 9703111698

Standard assembly production for Toyota and Nanni Diesel engines:

Toyota 120Z

Nanni Diesel T4

Cod.	Lt/min	ø Ports	Spare	UM	€
1829524	127	1"		PCS	
1816043			Impeller Replacement	PCS	

**SPX Johnson F7B-9 Pump (10-24637-01)**

Bronze body Neoprene impeller cooling pump.


Johnson ref 10-24637-01

Steyr ref 2203714-2

Standard assembly production for Steyr engines:

MO236-OMC/all 4 cyl.-6 cyl. from 1999

Cod.	Lt/min	ø Ports	Spare	UM	€
1829516	107	1"		PCS	
1816031			Impeller Replacement	PCS	

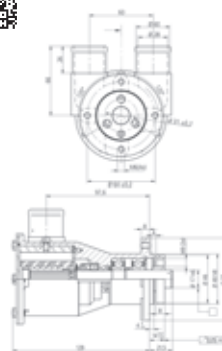**SPX Johnson F7B-9 Pump (10-24277-03)**

Bronze body Neoprene impeller cooling pump with unthreaded ports and O-Ring connection.

Johnson ref 10-24277-03

Volvo Penta ref 858469

Standard assembly production for Volvo Penta engines:

AD31A/31B/41A/41B

AQAD30A/31A/40A/40B/41A

AQD40A/41A


D41A/41B

MD31/31A/40A

TAMD31/31A/31B/41/41A/41B

TMD31/31A/31B/40A/40B/40C/41A/41B

Cod.	Lt/min	ø Ports	Spare	UM	€
1829509	107	1"		PCS	
1816031			Impeller Replacement	PCS	



Ancor Pm 15 Pump

Bronze body Neoprene impeller cooling pump.



Cod.	Lt/min	Ø Ports	mm	Spare	UM	€
1829014	22	3/8"	96xH60		PCS	
1814046				Impeller Replacement	PCS	

**ANCOR****Ancor Pm 37 Pump**

Bronze body Neoprene impeller cooling pump.



Cod.	Lt/min	Ø Ports	mm	Spare	UM	€
1829038	35	3/8"	103xH94		PCS	
1814052				Impeller Replacement	PCS	

**ANCOR****Ancor Pm 16 Pump**

Bronze body Neoprene impeller cooling pump.



Cod.	Lt/min	Ø Ports	mm	Spare	UM	€
1829016	45	1/2"	130xH88		PCS	
1814042				Impeller Replacement	PCS	

**ANCOR****Ancor Pm 34 Pump**

Bronze body Neoprene impeller cooling pump.



Cod.	Lt/min	Ø Ports	mm	Spare	UM	€
1829034	58	3/4"	142xH93		PCS	
1814032				Impeller Replacement	PCS	

**ANCOR****Ancor Pm 36 Pump**

Bronze body Neoprene impeller cooling pump.



Cod.	Lt/min	Ø Ports	mm	Spare	UM	€
1829036	100	1"	170xH118		PCS	
1814031				Impeller Replacement	PCS	

**ANCOR****Ancor Pm 40 Pump**

Bronze body Neoprene impeller cooling pump.



Cod.	Lt/min	Ø Ports	mm	Spare	UM	€
1829040	250	1" 1/2	205xH140		PCS	
1814030				Impeller Replacement	PCS	

**ANCOR**

Ancor St 114 Flanged Pump

Bronze cooling pump with Neoprene impeller.

Johnson ref F35B-9 cod 10-35157-5 / Jabsco ref 29300-2001

For engines:

Volvo Penta MD1/MD2/MD5/MD6/MD7/MD11/MB10/MB1


Perkins 1.25M/H1.36

Vetus GHS4

Ruggerini

Bukh Arona

Cod.	Ø Ports	Spare	UM	€
1829214	3/8"		PCS	
1814046		Impeller Replacement	PCS	

**ANCOR****Ancor St 112 Flanged Pump**

Bronze cooling pump with Neoprene impeller.


Johnson ref F4B-903 cod 10-24509-2

For engines:

Yanmar 2GM/2GMF/3GM/3GMF

Kohler

Cod.	Ø Ports	Spare	UM	€
1829212	3/8"		PCS	
1816054		Impeller Replacement	PCS	

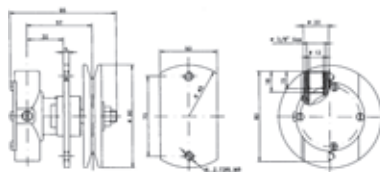**ANCOR****Ancor St 103 Flanged Pump**

Bronze cooling pump with Neoprene impeller.

Jabsco ref 18400-0001

For engines:

Onan 12MDJC/15MDJF/30MDEH/MDKLA

Cod.	Ø Ports	Spare	UM	€
1829203	3/8"		PCS	
1814046		Impeller Replacement	PCS	

**ANCOR****Ancor St 139 Flanged Pump**

Bronze cooling pump with Neoprene impeller.

Johnson ref F4B-9 cod 10-35355-01 / Jabsco ref 29470-2431


For engines:

Lombardini LDW 1404/1503/1603/1904/2004

Volpi Paguro 6000/6500/8500/16500

Iveco 4141M48

Cod.	Ø Ports	Spare	UM	€
1829239	3/8"		PCS	
1814041		Impeller Replacement	PCS	

**ANCOR****Ancor St 138 Flanged Pump**

Bronze cooling pump with Neoprene impeller.

Johnson ref F4B-9 cod 10-35098-1 / Jabsco ref 29470-2531

For engines:

Volvo Penta AQ/BB/MB/MD


Volpi Paguro 8000/12000/16000

Lombardini 603/903/1203/4031/LDW 1003/1404/2204/602M/903M/1204/502

Iveco 4021/4031/4041/4141/4241

Ruggerini MM250/RM270

Cod.	Ø Ports	Spare	UM	€
1829438	3/8"		PCS	
1814041		Impeller Replacement	PCS	

**ANCOR****Ancor St 137 Flanged Pump**

Bronze cooling pump with Neoprene impeller.

Johnson ref F4B-9 cod 10-35127-1 / Jabsco ref 23470-2331

For engines:

Nanni 2.60HE/3.90H/3.90HE/FK3/P30

Mitsubishi K2C/K3E/K4E/K3M

Farymann FK3

Cod.	Ø Ports	Spare	UM	€
1829338	3/8"		PCS	
1814026		Impeller Replacement	PCS	

**ANCOR**

PUMPS

ANCOR ENGINE COOLING PUMPS

Ancor St 136 Flanged Pump

Bronze cooling pump with Neoprene impeller.

Johnson ref F4B-9 cod 10-35161-1 / Jabsco ref 29470-2131

For engines:

Vetus K3/K4/K3D/K4D/M3.10/M4.14



ANCOR

Cod.	Ø Ports	Spare	UM	€
1829238	3/8"		PCS	
1814026		Impeller Replacement	PCS	

Ancor St 135 Flanged Pump

Bronze cooling pump with Neoprene impeller.

Johnson ref F35B-9 cod 10-35157-5 / Jabsco ref 29480-2231


For engines:

Bukh DV24ME/DV25/DI25ME

Ruggerini MM301/351

Iveco 8035

Lister Petter

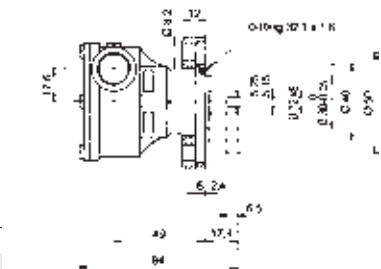

ANCOR

Cod.	Ø Ports	Spare	UM	€
1829235	3/8"		PCS	
1814026		Impeller Replacement	PCS	

Ancor St 134 Flanged Pump

Bronze cooling pump with Neoprene impeller.

Johnson ref F4B-9 cod 10-35240-1 / Jabsco ref 29480-0001

For engines:

Vetus GHS16/GHS6



ANCOR

Cod.	Ø Ports	Spare	UM	€
1829233	3/8"		PCS	
1814026		Impeller Replacement	PCS	

Ancor St 109 Flanged Pump


Bronze cooling pump with Neoprene impeller.

Johnson ref F35B-9 cod 10-35211-3 / Jabsco ref 29300-2001

For engines:

Farymann FK2

Nanni 2.40HE/FK2

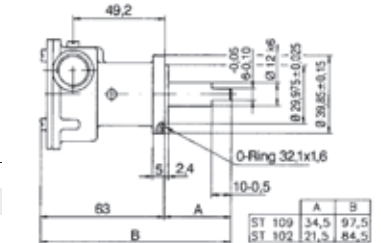

ANCOR

Cod.	Ø Ports	Spare	UM	€
1829209	3/8"		PCS	
1814046		Impeller Replacement	PCS	

Ancor St 147 Flanged Pump

Bronze cooling pump with Neoprene impeller. Johnson ref F5B-9 cod

10-14119-2 / Jabsco ref 3270-200

For engines: Nanni MB180/MB220/MB300


Perkins 4.99M/4.107/4.108/4.236/4.238/4114/Prima

VM 103/104/106/116/804/806

Iveco 804/806, Ruggerini PM105/RDM901

Sabb Norway, Solè Diesel 4108, BMW B130, Ford FSD425A

Mercedes OM636, Arona

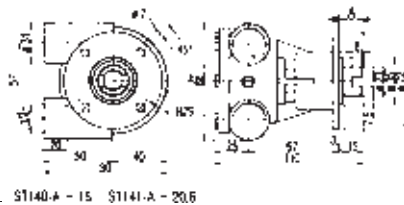

ANCOR

Cod.	Ø Ports	Spare	UM	€
1829234	3/4"		PCS	
1814032		Impeller Replacement	PCS	

Ancor St 149 Flanged Pump

Bronze cooling pump with Neoprene impeller.

Jabsco ref 29500-1501


For engines:

Iveco 3M/4AM/60/61/8031/804/8040/8041/8061/8065/8140/814

1/CO3M/CP3M/SM20

Perkins M50/60/80

Volvo MD22LA

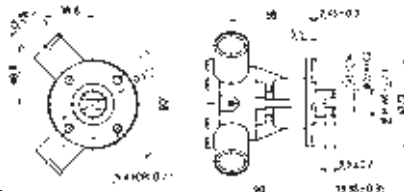

ANCOR

Cod.	Ø Ports	Spare	UM	€
1829249	3/4"		PCS	
1814032		Impeller Replacement	PCS	

Ancor St 142 Flanged Pump

Bronze cooling pump with Neoprene impeller.

Johnson ref F5B-9 cod 10-32058-1

For engines:

Volvo Penta AQD21/MD21/MD42A

Deutz SF6L912



Cod.	ø Ports	Spare	UM	€
1829242	3/4"		PCS	
1814032		Impeller Replacement	PCS	

**Ancor St 143 Flanged Pump**

Bronze cooling pump with Neoprene impeller.

Johnson ref F5B-9 cod 10-24334-01 / Jabsco ref 29500-1501

For engines:

Nanni 3.100HE/4.110HE/4.150HE/4.190HE/4.330TDI

Beta Marine BF2803/BV1903/BV2203



Cod.	ø Ports	Spare	UM	€
1829243	3/4"		PCS	
1814032		Impeller Replacement	PCS	

**Ancor St 146 Flanged Pump**

Bronze cooling pump with Neoprene impeller. Johnson ref F7B-9 cod

10-24127-1 / Jabsco ref 23430-1001

For engines: Solè Diesel MB16-4/MB616-6

VM HR488/HR492/HR494H10/HR592/HR688/HR692

BMW 636/B190/220/630/635/D530/D150/190/530/636

Mercruiser D2.8D/D3.6L/D7.3LD/D4.2L/D4.2LD

Mitsubishi 4DQ50/S4E2/S6E2, Cummins 6B/6C/SerieB

Mercedes OM616/OM617, Nanni 4.340TDI, Steyr



Cod.	ø Ports	Spare	UM	€
1829210	1"		PCS	
1814031		Impeller Replacement	PCS	

**Ancor St 151 Flanged Pump**

Bronze cooling pump with Neoprene impeller. Jabsco ref 29600-1001

For engines:

Vetus D4.29/DT43/DT64/DTA4.29/DTA43/DTA64

Iveco 806SM/8060/8061/8210/8361

Nanni 4.440

Saab Scania D5/D55

VM 114/6MH

MAN D0826



Cod.	ø Ports	Spare	UM	€
1829337	1"		PCS	
1814031		Impeller Replacement	PCS	

**Ancor St 150 Flanged Pump**

Bronze cooling pump with Neoprene impeller. Johnson ref F7B-9 cod

10-24014-01 / Jabsco ref 9700-21

For engines:

Iveco 503/504/505/513/520S/521/6AM/8141M/8210M/

8220M/836MTCA/CODM/CO3M/CP3M/OMCP


Nanni 6.660E/6.660HE/6.60LE

Perkins 4.270M/6H/6.236M/6.305M/6.354

Deutz DT/DTA, Ford 503C, Valmet



Cod.	ø Ports	Spare	UM	€
1829236	1"		PCS	
1814031		Impeller Replacement	PCS	

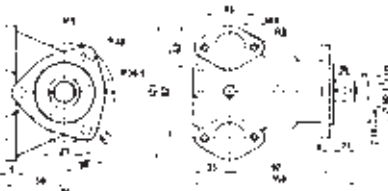**Ancor St 160 Flanged Pump**

Bronze cooling pump with Neoprene impeller.

Johnson ref F7B-9 cod 10-24277-1 / Volvo ref 3583115 (3581558)

For engines:

Volvo Penta AD31A/AD31B/AQAD30/AQAD31/AQAD41/AQD40/D41

KAD/KAMD/MD30A/MD31/MD40/TAMD30/TMD30



Cod.	ø Ports	Spare	UM	€
1829216	1"		PCS	
1814031		Impeller Replacement	PCS	



**ANCOR****Ancor Impeller Pumps Service Kit**

Ancor cooling impeller pumps maintenance service kit. Contains: Impeller, seals, bearings, cover with screws, cam, lubricant and user manual.

Cod.	For Pump	UM	€
1829701	1829014 (Type Pm15)	PCS	
1829702	1829038 (Type Pm37)	PCS	
1829703	1829016 (Type Pm16)	PCS	
1829704	1829034 (Type Pm34)	PCS	
1829705	1829036 (Type Pm36)	PCS	
1829706	1829040 (Type Pm40)	PCS	
1829712	1829212 (Type St112)	PCS	
1829714	1829235 (Type St135)	PCS	
1829716	1829239 (Type St139)	PCS	
1829718	1829203 (Type St103)	PCS	
1829740	1829249 (Type St143/147/148/149)	PCS	
1829741	1829210 (Type St146)	PCS	
1829743	1829236 (Type St150)	PCS	
1829745	1829337 (Type St151)	PCS	
1829746	1829216 (Type St160)	PCS	
1829771	1829257 (Type Mff57)	PCS	
1829772	1829340 (Type Cze200)	PCS	

**Johnson Impeller Pumps Service Kit**

Johnson cooling impeller pumps maintenance service kit. Contains impeller, lubricant, user manual and other spare parts depending on the kit.

**SPXFLOW**
Johnson Pump

Cod.	For Pump	UM	€
1829601	1829514 (Type F35B-8)	PCS	
1829603	1829538 (Type F4B-8)	PCS	
1829605	1829534 (Type F5B-8)	PCS	
1829604	1829505 (Type F5B-9)	PCS	
1829606	1829509 (Type F7B-9)	PCS	
1829607	1829510 and 1829516 (Type F7B-8/9)	PCS	
1829608	1829512 (Type F8B-8)	PCS	



1829604

Impeller Grease Lubricant

Impeller special lubricant grease ideal to ensure long life to the cooling pump and to the engine.




Cod.	Ref	Pack	UM	€
5705803	MTM	5 ml Tube	PCS	
5705819	SPX Johnson	20 ml Tube	PCS	

**Impeller Extractor**









Impeller extractor.

**MTM**
QUALITY

Cod.	For Impellers ø mm	UM	€
1814901	55<70	PCS	
1814902	70<130	PCS	



Paper Gaskets for Engine Cooling Pumps
Footprints in 1:1 scale
Overlap your impeller to check the dimensions

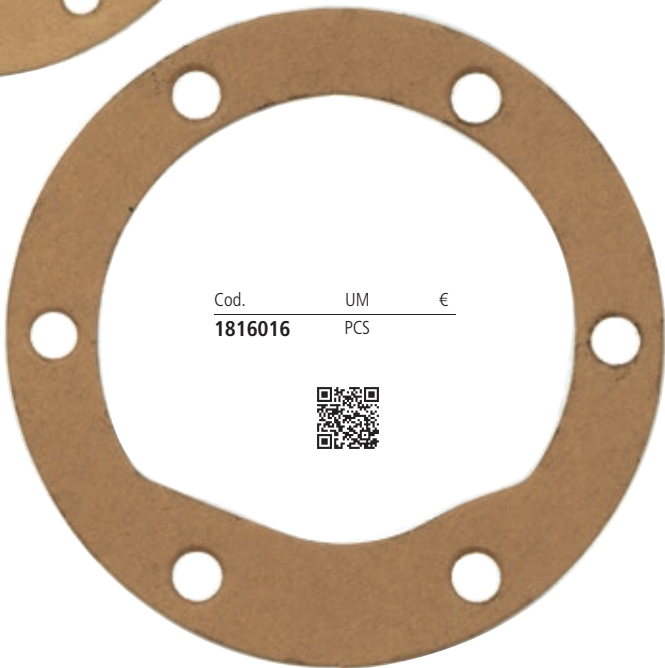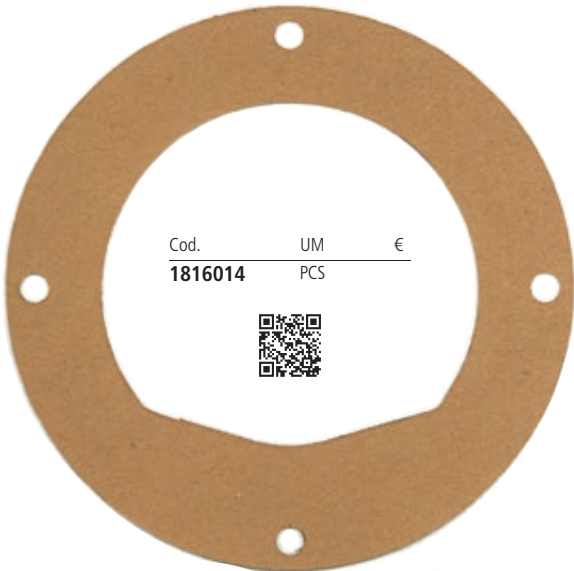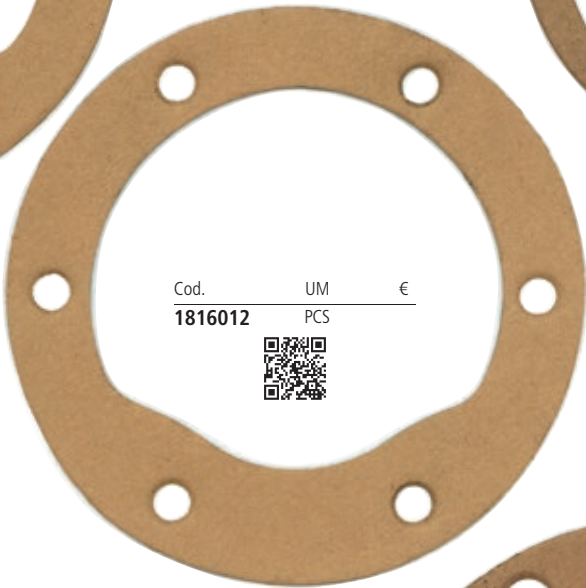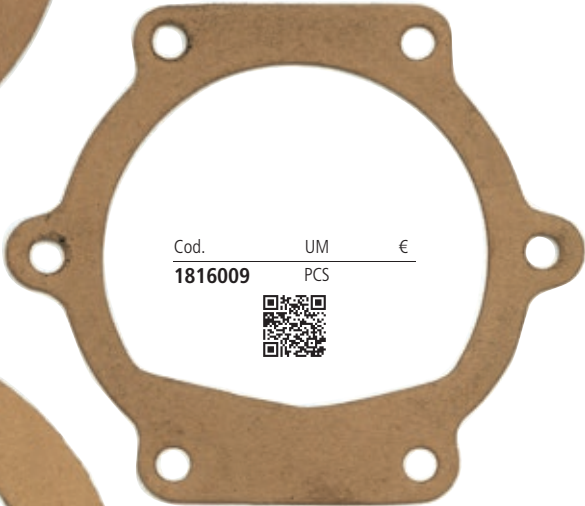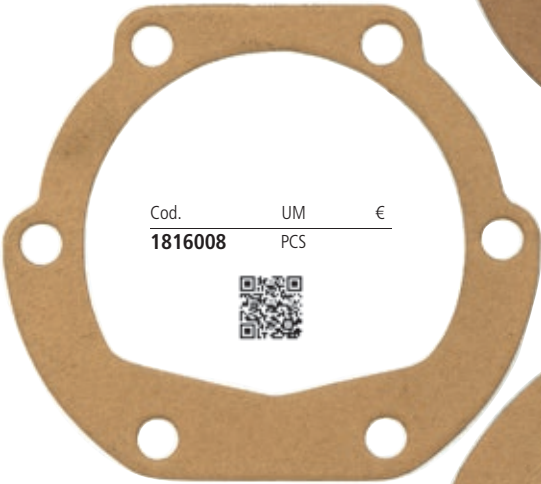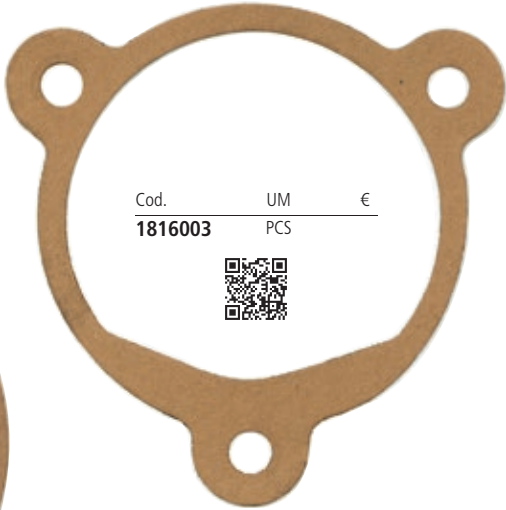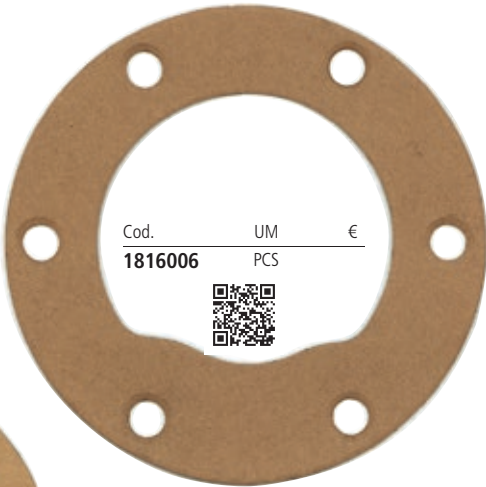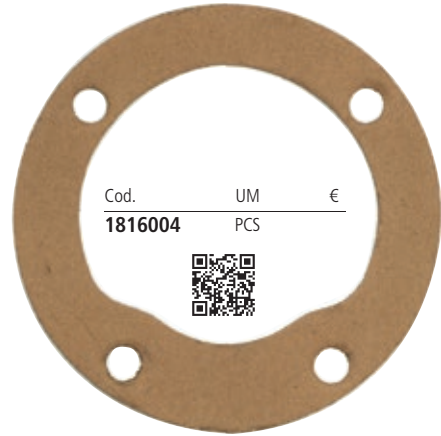


Impeller STD S Type

Replacement impeller for engine cooling and water systems pumps.

Neoprene: for fresh and salt water

Nitrile: for bilge, oils and derivatives




Cod.	Material	D mm	d1 mm	H mm	n.Blades	Ref	UM	€
1814025	Neoprene	40	9.5	19	6	Jabsco 4528-01 / Johnson 09-806B-1 / Volvo Penta 35-86494\803729 / Yanmar 104211-42071 / CEF 500100	PZ	
1814046	Neoprene	40	12	19	6	Jabsco 22405-01 / Johnson 09-808B / Volvo Penta 3586496\21951342 / CEF 500121	PZ	
1814026	Neoprene	51	12	22	6	Jabsco 18653-01 / Johnson 09-810B-1 / Yanmar 128990-42570 / CEF 500101	PZ	
1814041	Neoprene	51	12.7	22	6	Jabsco 673-0001 / Johnson 09-1026B-1 / Volvo Penta 3593659\2222936 / CEF 500116	PZ	

Impeller STD F Type

Replacement impeller for engine cooling and water systems pumps.

Neoprene: for fresh and salt water

Nitrile: for bilge, oils and derivatives




Cod.	Material	D mm	d1 mm	H mm	n.Blades	Ref	UM	€
1814038	Neoprene	32	8	12	6	Jabsco 1414-01 / CEF 500130 / Yanmar 128176-42071	PZ	
1814138	Nitrile	32	8	12	6	Jabsco 1414-03 / CEF 500230	PZ	
1814039	Neoprene	40	8	19	6	Jabsco 9200-01 / Ancor 1872	PZ	
1814134	Nitrile	45	8	13	6	Ancor 2079 / CEF 500232	PZ	
1814035	Neoprene	51	8	22.2	6	Jabsco 6303-01 / Johnson 09-824P-1 / CEF 500110	PZ	
1814135	Nitrile	51	8	22.2	6	Jabsco 6303-03 / Johnson 09-824P-9 / CEF 500210	PZ	

Impeller STD H Type

Replacement impeller for engine cooling and water systems pumps.

Neoprene: for fresh and salt water

Nitrile: for bilge, oils and derivatives




Cod.	Material	D mm	d1 mm	H mm	n.Blades	Ref	UM	€
1814052	Neoprene	51	10	22	6	CEF 500127 / Nanni 48300250	PZ	
1814054	Neoprene	51	12.7	22	6	Jabsco 22799-01 / CEF 500129 / Yanmar 124223-42092	PZ	
1814027	Neoprene	65	15.8	50.8	8	Jabsco 4598-01 / CEF 500102 / Volvo Penta 818680 / Sherwood 10187K	PZ	
1814127	Nitrile	65	15.8	50.8	8	Jabsco 4598-03 / CEF 500202	PZ	
1814033	Neoprene	57	15.8	31.5	12	Jabsco 4568-01 / Johnson 09-801B / CEF 500108 / Volvo Penta 875575-3	PZ	
1814042	Neoprene	57	12	29	12	Ancor 3342	PZ	
1814142	Nitrile	57	12	29	12	Ancor 2081	PZ	
1814028	Neoprene	61.9	15.8	31.5	12	Jabsco 18838-01 / Johnson 09-701B-1 / CEF 500103 / Volvo Penta 835512-5\3854286	PZ	
1814045	Neoprene	65	15.8	41.4	12	Jabsco 18948-01 / Johnson 09-702B-1 / CEF 500120 / Sherwood 10615K / Volvo Penta 83574-9 / Yanmar 128170-02070	PZ	
1814034	Neoprene	82.5	20.1	73	12	Jabsco 18958-01 / Johnson 09-704B / CEF 500164 / Sherwood 17000K	PZ	

Impeller STD B Type

Replacement impeller for engine cooling and water systems pumps.

Neoprene: for fresh and salt water

Nitrile: for bilge, oils and derivatives



Cod.	Material	D mm	d1 mm	H mm	n.Blades	Ref	UM	€
1814031	Neoprene	65	15.8	50	8	Jabsco 17937-0001\920-0001 / Johnson 09-1028BT-1 / CEF 500106 / Sherwood 18200K / Volvo Penta 3841697\877061 / Yanmar 127610-42270	PZ	
1814131	Nitrile	65	15.8	50	8	Jabsco 920-03 / Johnson 09-1028B-9 / CEF 500206	PZ	
1814040	Neoprene	65	15.8	76	8	Jabsco 17018-0001 / CEF 500177 / Volvo Penta 3583602\3593573	PZ	
1814030	Neoprene	95	25	63	9	Jabsco 836-01 / Johnson 09-1029B / CEF 500105 / Volvo Penta 875636\807904	PZ	
1814130	Nitrile	95	25	63	9	Jabsco 836-03 CEF 500205	PZ	
1814037	Neoprene	95	25	88.5	9	Jabsco 6760-01 / Johnson 09-802B / CEF 500115 / Yanmar 125613-42762	PZ	
1814029	Neoprene	65	15.8	50	10	Jabsco 17937-01 / CEF 500114 / Volvo Penta 3588475	PZ	
1814129	Nitrile	65	15.8	50	10	Jabsco 17937-03 / CEF 500214	PZ	
1814032	Neoprene	57	15.8	31	12	Jabsco 1210-01\3085-01 / Johnson 09-1027B-1 / CEF 500107 / Volvo Penta 386281\21951346 / Yanmar 129470-42532	PZ	
1814132	Nitrile	57	15.8	31	12	Jabsco 1210-03 / Johnson 09-1027B-9 / CEF 500207	PZ	
1814043	Neoprene	57	15.8	48	12	Jabsco 13554-01 / Johnson 09-812B-1 / CEF 500124 / Yanmar 119773-42600	PZ	
1814036	Neoprene	57	15.8	50	12	Jabsco 22120-01\18777-0001 / CEF 500104 / Volvo Penta 876120-7	PZ	
1814055	Neoprene	65	25	80	12	Johnson 09-821BT-1 / CEF 500162	PZ	
1814060	Neoprene	95	25	63.5	12	Jabsco 17935-01 / Johnson 09-819B / CEF 500135 / Volvo Penta 8772066\875736	PZ	
1814160	Nitrile	95	25	63.5	12	Jabsco 17935-03 / Johnson 09-819B-9 / CEF 500235	PZ	
1814070	Neoprene	95	25	88.5	12	Jabsco 17936-01 / Johnson 09-814B / CEF 500145 / Volvo Penta 8772066\875736	PZ	
1814170	Nitrile	95	25	88.5	12	Jabsco 17936-03 / Johnson 09-814B-9 / CEF 500245	PZ	
1814072	Neoprene	95	25	102	12	Johnson 09-705BT-1 / CEF 500182 / Sherwood 18000K	PZ	
1814073	Neoprene	95	25	130	12	Johnson 09-820B / CEF 500186	PZ	



Replacement impeller for engine cooling and water systems pumps.


Neoprene: for fresh and salt water

Nitrile: for bilge, oils and derivatives




Impeller STD 40MM-S6

Cod.	Material	D mm	d1 mm	H mm	CEF Ref	Jabsco Ref	UM	€
1814025	Neoprene	40	9.5	19	500100	4528-01	PCS	
1814046	Neoprene	40	12	19	500121	22405-01	PCS	

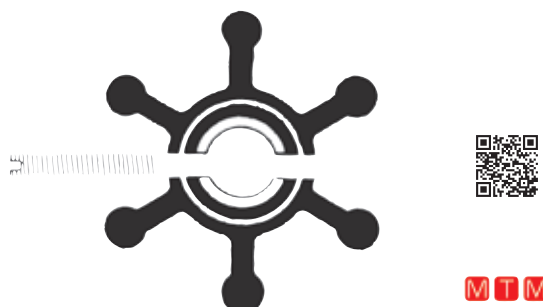

Impeller STD 51MM-S6

Cod.	Material	D mm	d1 mm	H mm	CEF Ref	Jabsco Ref	UM	€
1814026	Neoprene	51	12	22	500101	18653-01	PCS	
1814041	Neoprene	51	12.7	22	500116	18673-01	PCS	

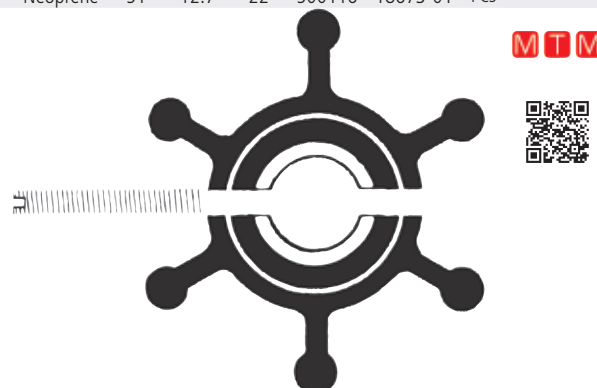

Impeller STD 32MM-F6

Cod.	Material	D mm	d1 mm	H mm	CEF Ref	Jabsco Ref	UM	€
1814038	Neoprene	32	8	12	500130	1414-01	PCS	
1814138	Nitrile	32	8	12	500230	1414-03	PCS	




Impeller STD 40MM-F6

Cod.	Material	D mm	d1 mm	H mm	Ancor Ref	Jabsco Ref	UM	€
1814039	Neoprene	40	8.1	19	1872	9200-01	PCS	




Impeller STD 45MM-F6

Cod.	Material	D mm	d1 mm	H mm	Ancor Ref	CEF Ref	UM	€
1814134	Nitrile	45.5	8	12.8	2079	500232	PCS	

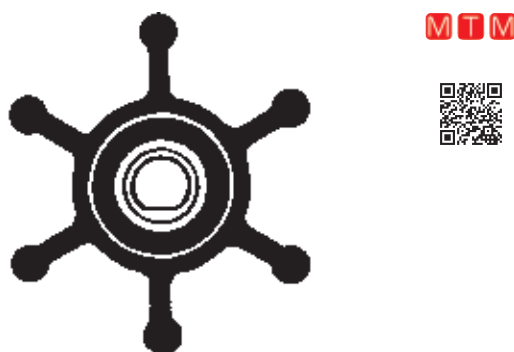


Impeller STD 51MM-F6

Cod.	Material	D mm	d1 mm	H mm	CEF Ref	Jabsco Ref	UM	€
1814035	Neoprene	51	8.1	22	500110	6303-01	PCS	
1814135	Nitrile	51	8.1	22	500210	6303-03	PCS	

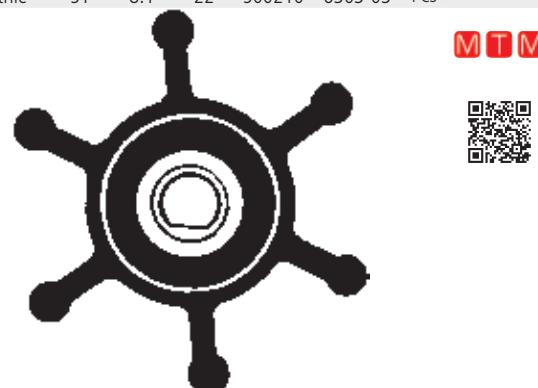

Impeller STD 51MM-H6


Cod.	Material	D mm	d1 mm	H mm	CEF Ref	Jabsco Ref	UM	€
1814052	Neoprene	51	10	22	500127		PCS	
1814054	Neoprene	51	12.7	22	500129	22799-01	PCS	

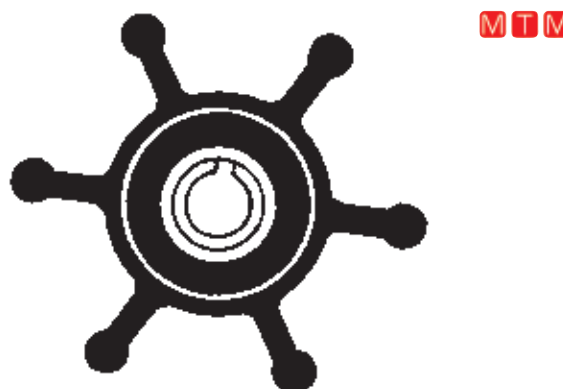



Impeller STD 61MM-H12

Cod.	Material	D mm	d1 mm	H mm	CEF Ref	Jabsco Ref	UM	€
1814028	Neoprene	61.9	15.8	31.5	500103	18838-01	PCS	

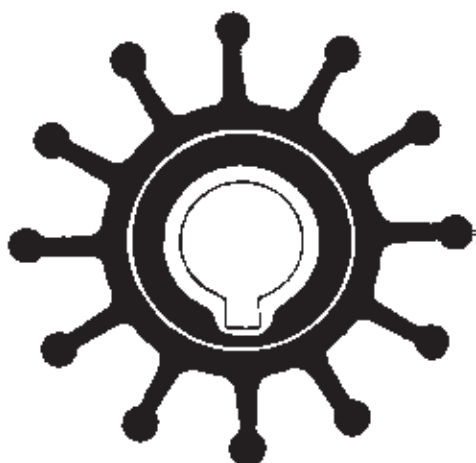


MTM



Impeller STD 57MM-H12

Cod.	Material	D mm	d1 mm	H mm	CEF/Ancor Ref	Jabsco Ref	UM	€
1814033	Neoprene	57	15.8	31.5	CEF 500108	4568-01	PCS	
1814042	Neoprene	57	12	29	ANCOR 3342		PCS	
1814142	Nitrile	57	12	29	ANCOR 2081		PCS	

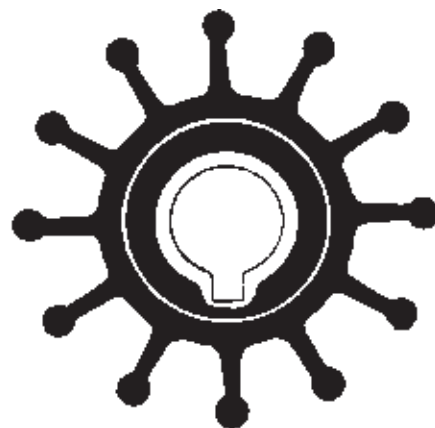


MTM



Impeller STD 65MM-H12

Cod.	Material	D mm	d1 mm	H mm	CEF Ref	Jabsco Ref	UM	€
1814045	Neoprene	65	15.8	41.4	500120	18948-01	PCS	

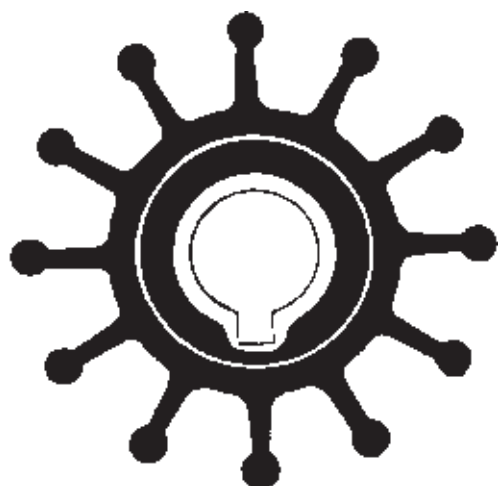


MTM



Impeller STD 57MM-B12

Cod.	Material	D mm	d1 mm	H mm	CEF Ref	Jabsco Ref	UM	€
1814032	Neoprene	57	15.8	31	500107	1210-01	PCS	
1814132	Nitrile	57	15.8	31	500207	1210-03	PCS	
1814043	Neoprene	57	15.8	48	500124	13554-01	PCS	
1814036	Neoprene	57	15.8	50	500104	22120-01	PCS	

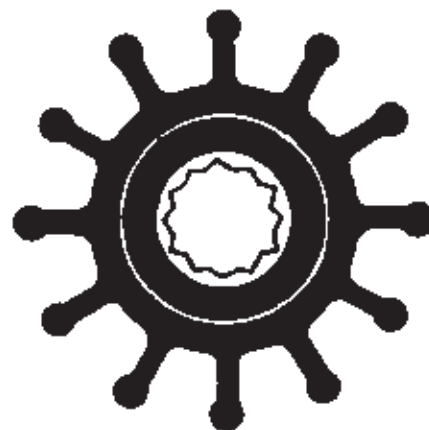


MTM



Impeller STD 65MM-B8

Cod.	Material	D mm	d1 mm	H mm	CEF Ref	Jabsco Ref	UM	€
1814031	Neoprene	65	15.8	50	500106	920-01	PCS	
1814131	Nitrile	65	15.8	50	500206	920-03	PCS	
1814040	Neoprene	65	15.8	76	500177	17018-01	PCS	

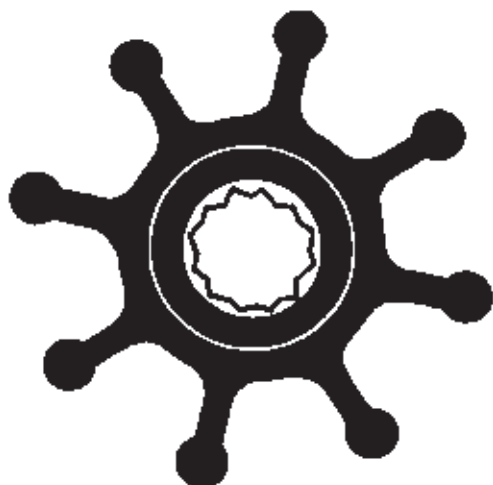


MTM



Impeller STD 65MM-B10

Cod.	Material	D mm	d1 mm	H mm	CEF Ref	Jabsco Ref	UM	€
1814029	Neoprene	65	15.8	50	500114	17937-01	PCS	
1814129	Nitrile	65	15.8	50	500214	17937-03	PCS	

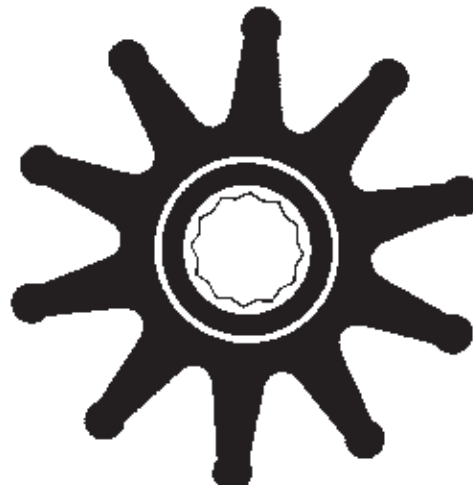

MTM




**Impeller STD 82MM-H12**

Cod.	Material	D mm	d1 mm	H mm	CEF Ref	Jabsco Ref	UM	€
1814034	Neoprene	82.5	20.1	73	500164	18958-01	PCS	




MTM

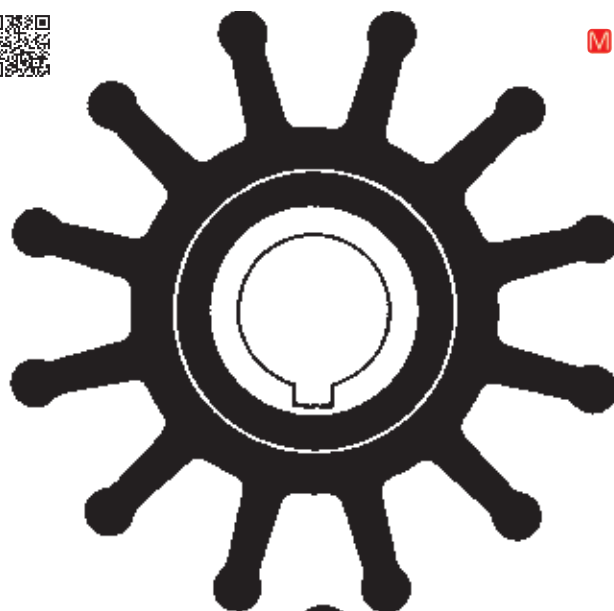**Impeller STD 95MM-B9**

Cod.	Material	D mm	d1 mm	H mm	CEF Ref	Jabsco Ref	UM	€
1814030	Neoprene	95	25	63	500105	836-01	PCS	
1814130	Nitrile	95	25	63	500205	836-03	PCS	
1814037	Neoprene	95	25	88.5	500115	6760-01	PCS	



MTM

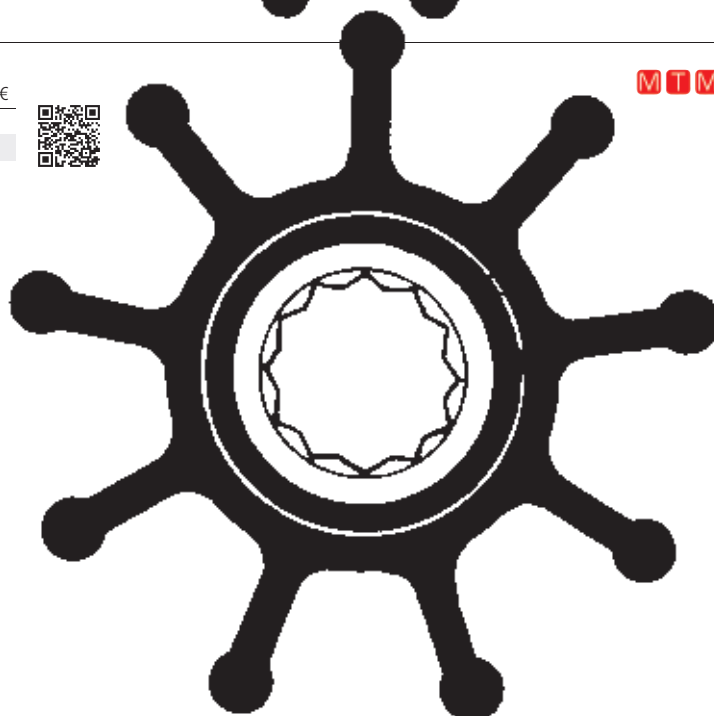**Impeller STD 95MM-B12**

Cod.	Material	D mm	d1 mm	H mm	CEF Ref	Jabsco Ref	UM	€
1814060	Neoprene	95	25	63.5	500135	17935-01	PCS	
1814160	Nitrile	95	25	63.5	500235	17935-03	PCS	
1814070	Neoprene	95	25	88.5	500145	17936-01	PCS	
1814170	Nitrile	95	25	88.5	500245	17936-03	PCS	
1814072	Neoprene	95	25	102	500182		PCS	
1814073	Neoprene	95	25	130	500186		PCS	



MTM



Jabsco genuine impeller for engine cooling and water systems pumps. Neoprene: for fresh and salt water
Nitrile: for bilge, oils and derivatives

**Impeller JABSCO 32MM-F6**


Cod.	Jabsco Ref	Material	D mm	d1 mm	H mm	UM	€
------	------------	----------	------	-------	------	----	---

1815038	1414-0001	Neoprene	32	8	12	PCS	
----------------	-----------	----------	----	---	----	-----	--

**Impeller JABSCO 40MM-S6**


Cod.	Jabsco Ref	Material	D mm	d1 mm	H mm	UM	€
------	------------	----------	------	-------	------	----	---

1815046	22405-0001	Neoprene	40	12	19	PCS	
1815025	4528-0001	Neoprene	40	9.5	19	PCS	

**Impeller JABSCO 51MM-F6**


Cod.	Jabsco Ref	Material	D mm	d1 mm	H mm	UM	€
------	------------	----------	------	-------	------	----	---

1815135	6303-0003	Nitrile	51	8.1	22	PCS	
----------------	-----------	---------	----	-----	----	-----	--

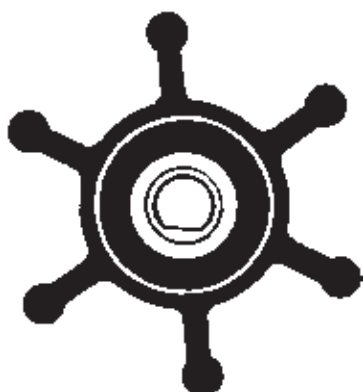**Impeller JABSCO 51MM-S6**


Cod.	Jabsco Ref	Material	D mm	d1 mm	H mm	UM	€
------	------------	----------	------	-------	------	----	---

1815026	18653-0001	Neoprene	51	12	22	PCS	
1815041	18673-0001	Neoprene	51	12.7	22	PCS	

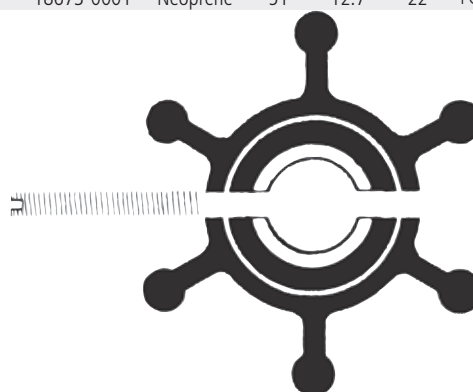**Impeller JABSCO 65MM-B8**


Cod.	Jabsco Ref	Material	D mm	d1 mm	H mm	UM	€
------	------------	----------	------	-------	------	----	---

1815031	920-0001	Neoprene	65	15.8	50	PCS	
1815131	920-0003	Nitrile	65	15.8	50	PCS	
1815040	17018-0001	Neoprene	65	15.8	76	PCS	

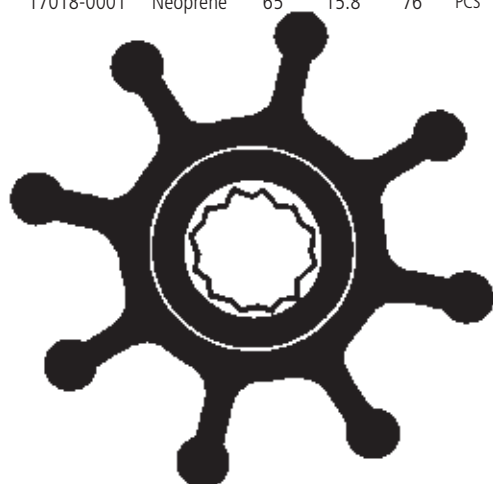**Impeller JABSCO 65MM-10**

Cod.	Jabsco Ref	Material	D mm	d1 mm	H mm	UM	€
------	------------	----------	------	-------	------	----	---

1815029	17937-0001	Neoprene	65	15.8	50	PCS	
1815129	17937-0003	Nitrile	65	15.8	50	PCS	

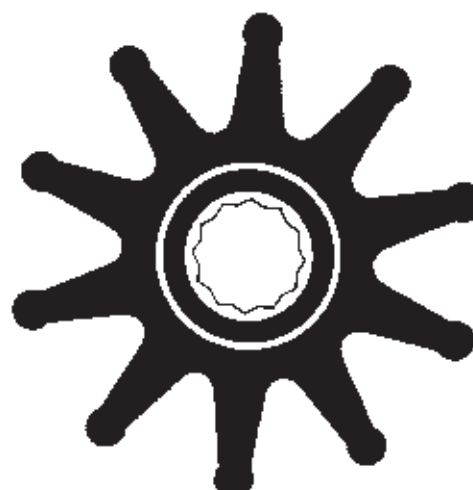


Johnson genuine impeller for engine cooling and water systems pumps. Neoprene: for fresh and salt water
Nitrile: for bilge, oils and derivatives

**Impeller 35MM**


Cod.	Johnson Ref	Material	D mm	d1 mm	H mm	UM	€
1816136	09-1077B-9	Nitrile	35.2	8	12.7	PCS	

SPXFLOW
Johnson Pump**Impeller 40MM**


Cod.	Johnson Ref	Material	D mm	d1 mm	H mm	Jabsco Ref	UM	€
1816025	09-806B-1	Neoprene	40	9.5	19	4528-0001	PCS	
1816046	09-808B-1	Neoprene	40	12	19	22405-0001	PCS	

SPXFLOW
Johnson Pump**Impeller 45MM/6B**

Cod.	Johnson Ref	Material	D mm	d1 mm	H mm	UM	€
1816134	09-1052S-9	Nitrile	45.2	8	12.8	PCS	

SPXFLOW
Johnson Pump**Impeller 45MM/8B**


Cod.	Johnson Ref	Material	D mm	d1 mm	H mm	UM	€
1816137	09-843S-9	Nitrile	45.2	8	12.8	PCS	

SPXFLOW
Johnson Pump**Impeller 51MM/F**

Cod.	Johnson Ref	Material	D mm	d1 mm	H mm	Jabsco Ref	UM	€
1816035	09-824P-1	Neoprene	50.8	8	22		PCS	
1816135	09-824P-9	Nitrile	50.8	8	22	6303-0003	PCS	


SPXFLOW
Johnson Pump**Impeller 50MM/S**

Cod.	Johnson Ref	Material	D mm	d1 mm	H mm	Jabsco Ref	UM	€
1816026	09-810B-1	Neoprene	50.8	12	22	18653-001	PCS	
1816041	09-1026B-1	Neoprene	50.8	12.7	22	673-0001	PCS	
1816126	09-810B-9	Nitrile	50.8	12	22		PCS	
1816141	09-1026B-9	Nitrile	50.8	12.7	22	673-0003	PCS	

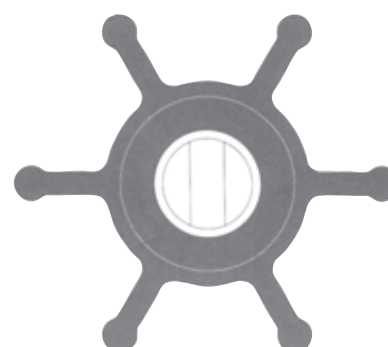
SPXFLOW
Johnson Pump

**Impeller 57MM/H**

Cod.	Johnson Ref	Material	D mm	d1 mm	H mm	Jabsco Ref	UM	€
1816033	09-801B	Neoprene	57.1	15.9	31.5	4568-0001	PCS	
1816138	09-804B-9	Nitrile	57.1	20	31.5		PCS	

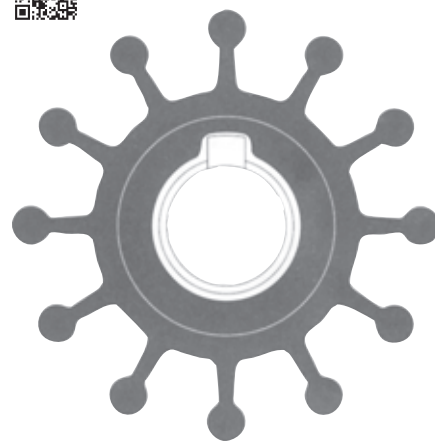
SPXFLOW
 Johnson Pump
**Impeller 57MM/B**


Cod.	Johnson Ref	Material	D mm	d1 mm	H mm	Jabsco Ref	UM	€
1816032	09-1027B-1	Neoprene	57.1	15.8	31.5	1210-0001	PCS	
1816039	09-1027BT	Neoprene	57.1	15.8	31.5	1210-0001	PCS	
1816034	09-1027B-10	Neoprene	57.1	15.8	31.85		PCS	
1816043	09-812BT-1	Neoprene	57.1	15.8	48.2	13554-0001	PCS	
1816132	09-1027B-9	Nitrile	57.1	15.8	31.5	1210-0003	PCS	

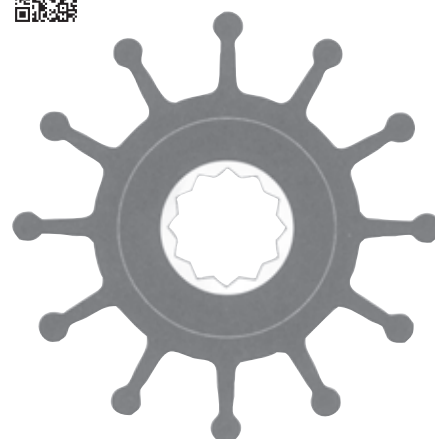
SPXFLOW
 Johnson Pump
**Impeller 65MM/8B**

Cod.	Johnson Ref	Material	D mm	d1 mm	H mm	Jabsco Ref	UM	€
1816031	09-1028BT-1	Neoprene	65	15.8	50.2	17937-0001	PCS	
1816131	09-1028B-9	Nitrile	65	15.8	50.2	17937-0003	PCS	


SPXFLOW
 Johnson Pump
**Impeller 65MM/12B**


Cod.	Johnson Ref	Material	D mm	d1 mm	H mm	UM	€
1816055	09-821BT-1	Neoprene	65	25	80	PCS	

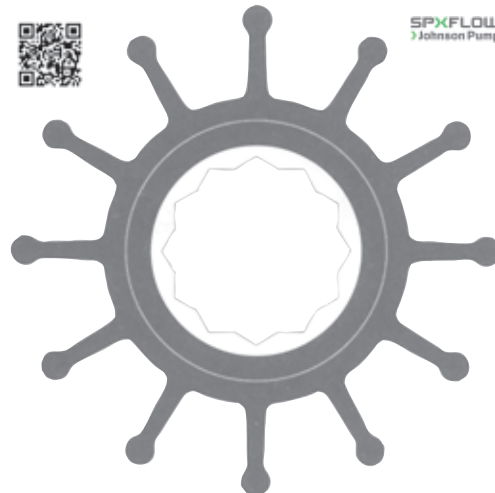
SPXFLOW
 Johnson Pump


**Impeller 95MM/9B**


Johnson replacement impeller.

Cod.	Pump Ref	Johnson Ref	Material	D mm	d1 mm	H mm	Jabsco Ref	UM	€
1816030	F8	09-1029B	Neoprene	95	25	63	836-0001(EU) 17935-0001(USA)	PCS	
1816037	F9	09-802B	Neoprene	95	25	88.5	6760-0001	PCS	

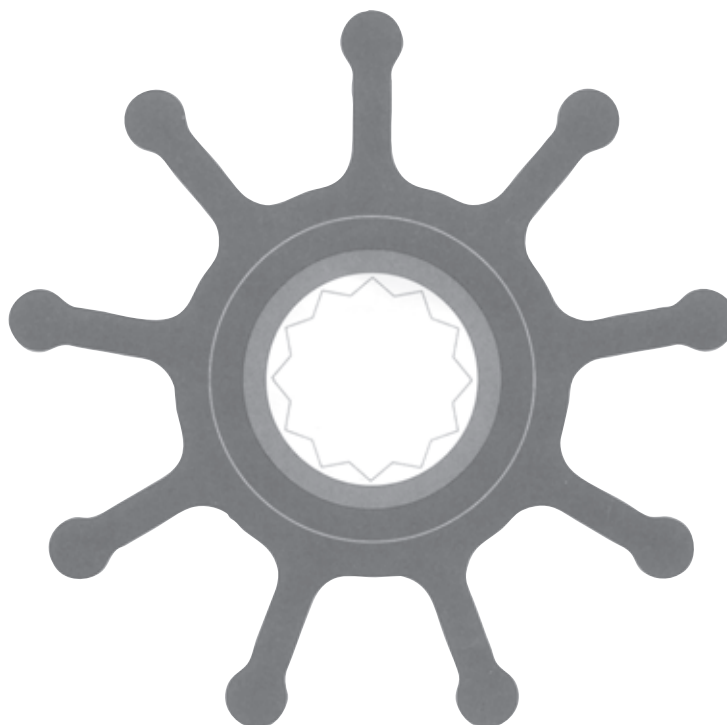SPXFLOW
Johnson Pump**Impeller 95MM/11B**

Johnson replacement impeller.

Cod.	Pump Ref	Johnson Ref	Material	D mm	d1 mm	H mm	Jabsco Ref	UM	€
1816060	F8	09-819B	Neoprene	95	25	63	836-0001(EU) 17935-0001(USA)	PCS	
1816070	F9	09-814B	Neoprene	95	25	88.5	21676-0001(EU) 17936-0001(USA)	PCS	
1816073	F95	09-820B	Neoprene	95	25	130		PCS	
1816072	F98	09-842B	Neoprene	95	25	180		PCS	
1816160	F8	09-819B-9	Nitrile	95	25	63	836-0003(EU) 17935-0003(USA)	PCS	

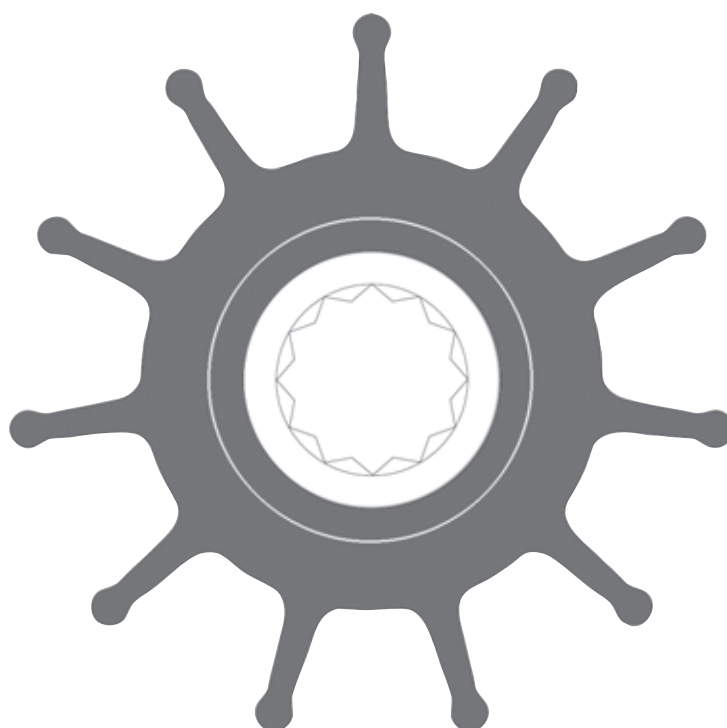SPXFLOW
Johnson Pump

Mercury Engine Impeller

Cod.	Johnson Ref	Material	D mm	d1 mm	H mm	Mercury Ref	Jabsco Ref	UM	€
1816047	09-703P-1	Neoprene	66.7	18.5	51	47-59362T	17954-0001	PCS	


SPXFLOW
Johnson Pump



Sherwood Pumps Impellers

Cod.	Johnson Ref	Material	D mm	d1 mm	H mm	Sherwood Ref	Jabsco Ref	UM	€
1816028	09-701B-1	Neoprene	62.3	15.87	31.8	9959K	18838-0001	PCS	
1816045	09-702B-1	Neoprene	65.4	16.00	41.4	10615K	18948-0001	PCS	
1816048	09-704BT-1	Neoprene	84.1	20.00	73.4	17000K	18958-0001	PCS	

SPXFLOW
Johnson Pump

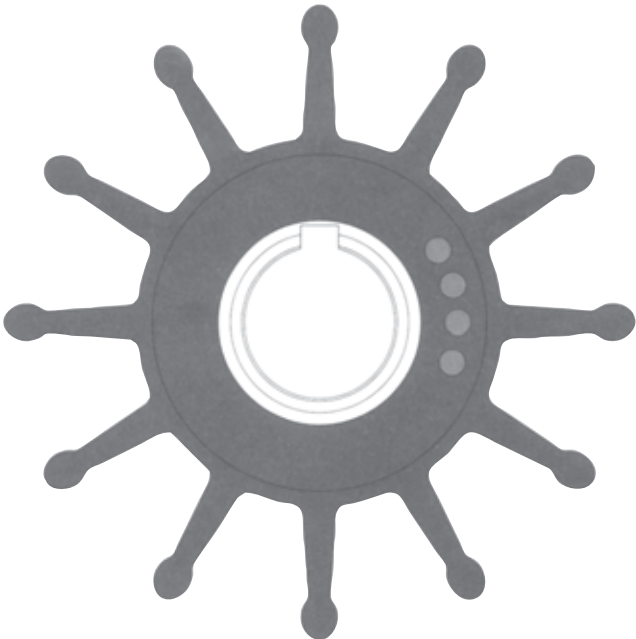

Yanmar Engine Impellers


MTM Yanmar engine impellers.

Cod.	Genuine Code	Engine Type	d1	D	H	Blades	Socket Type	UM	€
1814038	128170-42070	1GM10	8	32	12	6	F	PZ	
1816038	128176-42071 (Genuine Yanmar)	1GM10	8	32	12	6	F	PZ	
1814025	104211-42070	YSB8/12/YE8/12/2QM15/20/3QM30/2GM20/3GM30	9.5	40	19	6	S	PZ	
1814054	124223-42091/128296-42070	2GM20F/3GM30F/2QM20/3QM30/3HM35/35F	12.7	51	22	6	H	PZ	
1816054	124223-42092 (Genuine Yanmar)	2GM20F/3GM30F/3HM35/35F	12.7	51	22	6	H	PZ	
1814032	129470-42530	3JH2/4JH2 (all)	15.8	57	31	12	B	PZ	
1814031	127610-42200	4LH (all)	15.8	65	50	8	B	PZ	
1814029	129670-42530	3JH3 (all)	15.8	65	50	10	B	PZ	

**Volvo Penta Diesel Engine Impeller**

Volvo Penta diesel engines Johnson impeller.

Cod.	Genuine Code	Engine Type	UM	€
1816046	21951342	2001/2002/2003	PZ	
1816032	21951346	2003T	PZ	
1816031	21951356	AQAD31A/AD31A-B-D-XD-P-LA	PZ	
1816031	21951356	MD31A/TMD31A/-B-D-LA	PZ	
1816031	21951356	TAMD31A-B-D-P-L-M-SA	PZ	
1816031	21951356	KAD32A	PZ	
1816041	22222936	D1-13/D1-20/D130/D2-40	PZ	
1816032	21951346	D2-50/D2-55/D2-60/D2-75	PZ	
1816043	21951352	D3	PZ	
1816031	21951356	D4 E-F con AQ-IPS Drives	PZ	
1816031	3588475	D4 entroboro/D4 A-D con AQ-IPS Drives	PZ	
1816055	22994993	D6 E-F con AQ-IPS Drives	PZ	
1814040	3593573	D6 entroboro/D6 A-D con AQ-IPS Drives	PZ	
1816031	21951356	KAD44P-A-B-C/KAMD44P-A-B-C	PZ	
1816031	21951356	KAD300A/KAMD300A	PZ	
1816046	21951342 (4 viti)	MD1A-B/MD2A-B/MD5A-B-C/MD11C-D	PZ	
1816025	3586494 (6 viti)	MD1A-B/MD2A-B/MD5A-B-C/MD11C-D	PZ	
1816046	21951342	MD3B/MD17C-D	PZ	
1816046	21951342 (4 viti)	MD6A-B	PZ	
1816025	3586494 (6 viti)	MD6A-B	PZ	
1816046	21951342	MD7A-B	PZ	
1816033	21951350	MD21A-B/AQD21A-B	PZ	
1816032	21951346	MD22A-B/TMD22A-B/TAMD22A	PZ	
1816031	21951356	MD30A-B-D-AQ/TAMD30A-B-D-AQ/TMD30A-B-D-AQ/AQAD30A	PZ	
1816031	21951356	MD40A/TMD40A-B-C/TAMD40A-B/AQAD40/AQAD40A-B	PZ	
1816025	3586494	MD2010/MD2020	PZ	
1816041	22222936	MD2030/MD2040	PZ	
1816031	21951356	TAMD41P-L-M-HA-HB/AD41P-LA/KAD42A-B-PA/KAMD42A-B-PA	PZ	
1816031	21951356	KAD43P-A/KAMD43P-A	PZ	
1816031	21951356	TMD41A-B-D-LA/TAMD41A-B-D/D41A-B-D-LA/AD41A-B-D	PZ	
1816031	21951356	AQD41A/AQAD41A	PZ	
1816031	21951356	AD31/MD31	PZ	

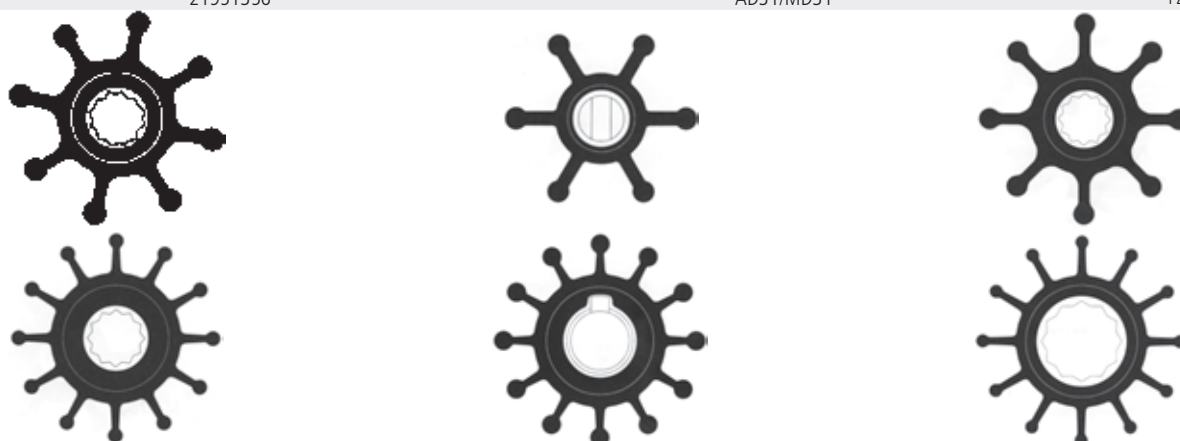


Volvo Penta Gasoline Engine Impellers

Volvo Penta gasoline engines Johnson impellers.



Cod.	Genuine Code	Engine Type	UM	€
1816032	21951348	3.0GLP-C	PZ	
1816043	21213664/22307636	3.0GLP-D-E-J/3.0GXi-J/3.0GXiC-J	PZ	
1816043	21213664/22307636	4.3GL-J-JF/GXi-J-JF/OSi-J-JF/4.3GXi-G-GF/OSi-G-GF	PZ	
1816043	21213664/22307636	5.0GL-J-JF/GXi-J-JF/OSi-J-JF/5.0GXi-G-GF/OSi-G-GF	PZ	
1816043	21213664/22307636	5.7Gi300-J-JF/5.7OSi-J-JF/5.7GXi-J-JF/5.7OSXi-J-JF	PZ	
1816043	21213664/22307636	5.7Gi-F-GF/GXi-G-GF/OSi-E-EF	PZ	
1816032	21951346	7.4GL/7.4Gi-GSi/DPX385	PZ	
1816043	21213664/22307636	8.1Gi-J-JF/GXi-J-JF/OSi-J-JF/8.1Gi-H-HF/8.1GXi-G-GF/8.1OSi-D-DF	PZ	
1816028	3854286	8.2GL	PZ	
1816032	21951346 (HU-BY)	8.2GSi/DPX415	PZ	
1816032	21951348 (WT)	8.2GSi/DPX415	PZ	
1816032	21951346	500A-B/501A-B/570A/571A/572A	PZ	
1816036	876120	740A-B	PZ	
1816041	22222936	AQ95/AQ100/AQ110/AQ115/AQ120A/AQ130	PZ	
1816033	21951350	AQ120B/AQ140/AQ145A/AQ165/AQ171	PZ	
1816033	21951350	AQ120B/AQ125A-B/AQ125B/AQ131A-B-C-D/230A-B/BB140A	PZ	
1816033	21951350	AQ140A/BB145A/AQ145A-B/AQ151A-B-C/250B/BB145A/AQ145A-B/AQ151A-B-C/250B	PZ	
1816033	21951350	AQ170A-B-C	PZ	
1816028	3854286	AQ225B-C	PZ	
1816036	876120	AQ225D-E-F	PZ	
1816032	21951346	AQ231A-B	PZ	
1816036	876120	BB231A	PZ	
1816028	3854286	AQ255A	PZ	
1816032	21951346 (W31mm)	AQ255B	PZ	
1816036	876120 (W50mm)	AQ255B	PZ	
1816032	21951346 (W31mm)	AQ260A/BB260A-B-C	PZ	
1816036	876120 (W50mm)	AQ260A/BB260A-B-C	PZ	
1816036	876120	AQ260B	PZ	
1816032	21951346 (W31mm)	AQ271A-B-C-D/BB261A/AQ280A/AQ290A/AQ311A-B	PZ	
1816036	876120 (W50mm)	AQ271A-B-C-D/AQ280A/AQ290A/AQ311A-B	PZ	
1816032	21951346 (W31mm)	BB25A-B-C	PZ	
1816036	876120 (W50mm)	BB25A-B-C	PZ	

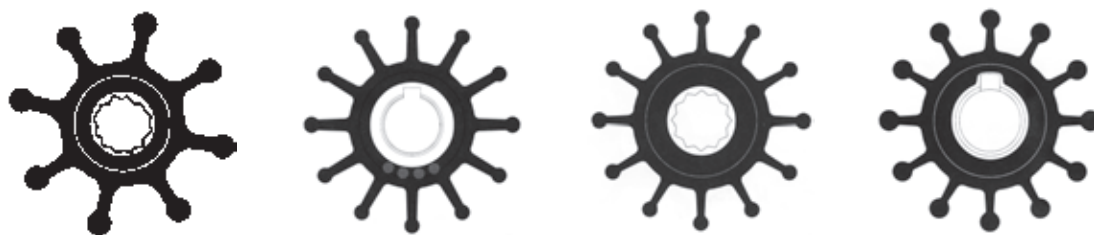
**Mercruiser Engine Impellers**

MTM Mercruiser engine impellers.



Cod.	Genuine Code	Engine Type	d1 mm	D mm	H mm	n.Blades	Socket	UM	€
1814238	47-89984T4	Alpha One M-MR	22.2	60	33.8	6	G	PZ	
1814304	47-43026T2	Alpha One (II gen.)	22.4	89	32.5	6	G	PZ	
1814330	47-59362T1	Bravo I-II-III	19	67	50.8	8	F	PZ	
1814332	47-8M0104229	Bravo I-II-III (New)	11.4	66.5	50.6	8	E	PZ	



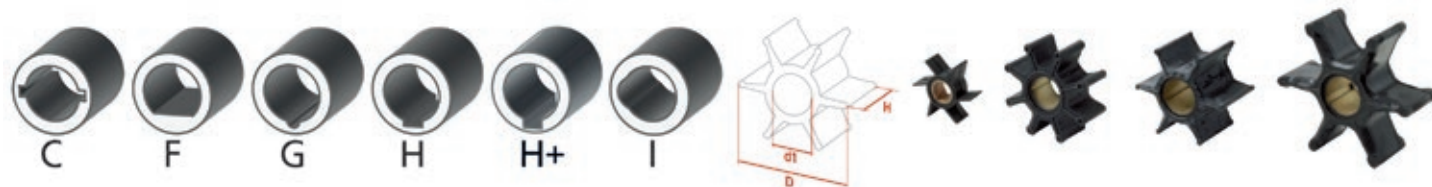

Mercury Engine Impellers



Cod.	Genuine Code	Engine Type HP	d1 mm	D mm	H mm	Socket	UM	€		
1814301	47-95289 2	2T(2.2/2.5/3/3.3)	12	42.5	14	C	PCS			
1814302	47-16154 3	2T(2.5/3.3/4/5) 4T(2.5/3.5/4/5/6)	10.25	33.6	14.3	G	PCS			
1814239	47-89980	2T(3.5/3.6/4/4.5/7.5/9.8/9.9)	11.13	32	14.35	G	PCS			
1814235	47-89981	2T(4/4.5/7.5/9.8)	11.59	32	14.4	G	PCS			
1814306	47-803748 1	2T(6/8) 4T(8/9.9)	12	40	17.2	G	PCS			
1814303	47-42038Q02	2T(6/8/9.9/10/XR10/15) 4T(8/9.9/13.5/15)	13	58.8	11.7	G	PCS			
1814236	47-89982	2T(20)	15.87	51.5	19.05	G	PCS			
1814240	47-85089-10	2T(15/18/20/25/30/40/50) 4T(8/9.9/13.5/15/25/30/40/50)	15.87	73	12.6	G	PCS			
1814237	47-89983T	2T(25/30/35/40/45/50/60/70)	19	51.8	19.05	G	PCS			
1814305	47-19453T	2T(45/50/55/60) 4T(30/40/50/60)	19.25	78.2	25.15	G	PCS			
1814304	47-43026Q02	2T(45/50/55/60/70/75/80/90/100/115/125/200/225) 4T(30/40/50/60/100/115/135/150/175/200/225/250/275/300) Alpha One II Gen	22.4	89	32.5	G	PCS			
1814238	47-89984T4	2T(45/50/55/60/70/75/80/90/100/115/125/200/225) 4T(30/40/50/60/100/115/135/150/175/200/225/250/275/300) Alpha One M-MR	22.2	60	33.8	G	PCS			
1814313	47-888689	4T(225EFI)	22	90	30.5	H	PCS			
1814330	47-59362T1	Bravo I-II-III Old	19	67	50.8	F	PCS			
1814332	47-8M0104229	Bravo I-II-III New	11.4	66.5	50.6	E	PCS			



Suzuki Engine Impellers

Cod.	Genuine Code	Engine Type HP	d1 mm	D mm	H mm	Socket	UM	€		
1814288	17461-98501/2/3	2T(DT2/DT2.2/DT4/DT5/DT6/DT8) 4T(DF4/DF5/DF6)	10.15	41	14	C	PCS			
1814289	17461-93901/92D02	2T(DT8/DT9.9) 4T(DF8/DF9.9)	12.3	42	20	H	PCS			
1814284	17461-93901/2/3	4T(9.9/15)	13.2	39.3	22	H	PCS			
1814287	17461-96301/10/11/12	2T(DT20/DT25/DT30/DT40) 4T(DF25/DF25RV2/DF30/DF40/DF50)	17.1	67.5	16.18	H	PCS			
1814286	17461-94700/1	2T(DT55/DT65)	17.1	67	19	H	PCS			
1814285	17461-95300/1/2	2T(DT75/DT85)	20.1	67.5	19	H	PCS			
1814290	17461-87E10/E11	2T(DT90/DT100) 4T(DF60/DF70)	22.2	78.3	26	H	PCS			
1814291	17461-90J00/01	4T(DF90/DF115/DF140/DF150TZ/DF175TZ)	24.3	86	31.7	H	PCS			
1814292	17461-93J00	4T(DF200/DF225/DF250/DF300TZ)	24.3	87	39	H	PCS			

Tohatsu Engine Impellers

Cod.	Genuine Code	Engine Type HP	d1 mm	D mm	H mm	Socket	UM	€		
1814301	309-65021-0	2T(M2.5/M3.5)	12	42.5	14.1	C	PCS			
1814302	369-65021-1	2T(M3.5B/M4C/M5B) 4T(MFS2.5C/MFS3.5C/MFS4C/MFS5C/MFS6C)	10.25	33.6	14.3	G	PCS			
1814306	3B2-65021-1	2T(M6B/M8B/M9.8B) 4T(MFS8A/MFS9A/MFS9.8A3)	12.12	40	18.03	G	PCS			
1814341	334-65021-0	2T(M9.9D-D2/M15D-D2/M18E-E2) 4T(MFS9.9B/MFS15B/MFS18B)	13.96	40.7	23.35	H	PCS			
1814342	335-65021-0	2T(M25C2-C3/M30A3-A4/M35C/M40C) 4T(MFS25A/MFS30A)	17.12	44.1	20.25	H	PCS			
1814337	3C8-65021-2	2T(M40D-D2/M50D-D2/MD40TLDI/MD50TLDI)	17.2	50.4	20.15	H	PCS			
1814343	3B7-65021-2	2T(M60B-C/M70/M90/M115/M120/M140)	20.15	67.4	35.1	H	PCS			



Yamaha Engine Impellers










Cod.	Genuine Code	Engine Type HP	d1 mm	D mm	H mm	Socket	UM	€		
1814249	646-44352-01	2T(2A/2B/2C)	11.15	47.5	13.7	H	PCS			
1814250	6E0-44352-00	2T(4A/5C) 4T(F4A)	11	40	12.6	H	PCS			
1814307	6L5-44352-00	2T(3A)	9.9	36	14.5	H	PCS			
1814246	662-44352-01	2T(6/8)	14	40	22	H	PCS			
1814247	6G1-44352-00	2T(6C/6D/8C)	11.9	40	18	H	PCS			
1814245	682-44352-03	2T(9.9/15) 4T(F9.9A/F9.9B)	13	40	22	H	PCS			
1814244	63V-44352-01	2T(9.9/15) 4T(F9/F9.9/F15)	12.85	53	14	H	PCS			
1814309	6L2-44352-00	2T(20D/25N)	13.8	52	18	H	PCS			
1814251	689-44352-02	2T(20C/25D/28A)	16.15	69.5	12.8	H	PCS			
1814310	6H4-44352-02	2T(25J/25Q/30D/40H/50D) 4T(F20/F25)	16.5	51.5	18	H	PCS			
1814241	6H3-44352-00	2T(25B/60/70) 4T(F40/F50/F60)	18.05	51.8	19.05	H	PCS			
1814277	6F5-44352-00	2T(40Q/40D)	16.04	69.8	22.1	H	PCS			
1814248	688-44352-03	2T(75/80/90A)	20.1	58	29	H	PCS			
1814313	6E5-44352-01	2T(115/130/140/150/175/200/225/250/300) 4T(F115/F150/F200/F225)	22.45	89	31	H	PCS			
1814316	68T-44352-00	4T(F6/F8)	12	52.8	13.5	H	PCS			
1814317	67F-44352-00	4T(F80/F100)	20	58.2	34.7	H	PCS			






Honda Engine Impellers

Cod.	Genuine Code	Engine Type HP	d1 mm	D mm	H mm	Socket	UM	€		
1814460	19210-881-A01/A02	4T(BF4.5/BF5/BF75/BF100/BF8)	14.2	41	23	F	PCS			
1814461	19210-ZV4-651	4T(BF9.9 AX-BX-AM-B/BF15 AX-BX-B2-A1-A2-AM-B)	14.1	41	27.55	H	PCS			
1814462	19210-ZW9-003/013	4T(BF8/BF9.9D/BF10D-B)	13	45.6	14.8	H	PCS			
1814463	19210-ZV9-A31/032	4T(BF8D/BF15D3/BFP8/BFP9.9/BFP10)	16.2	45.6	14.8	H	PCS			
1814464	19210-ZV7-003	4T(BF20A-A1-A2-AX/BF25/BF30A-A1-A2-AX-D4)	17.2	55.75	20.2	H+	PCS			
1814465	19210-ZV5-003	4T(BF35/BF45/BF40/BF50A-A1-A2-AX-B-B2-BX)	17.2	55.75	20.2	H	PCS			
1814304	19210-ZW1-003	4T(BF75/BF90)	22.4	89	32.5	G	PCS			
1814466	19210-ZW1-B02/3/4	4T(BF75/BF90A1-AX-AV-K/BF115/BF130A1-A2-A3-AX/BF135/BF150A4)	23.35	87.8	31	H	PCS			
1814467	19210-ZY3-003	4T(BF175/BF200/BF225A2-A3-A6)	26	89.75	31.3	H	PCS			
1814468 	19210-ZY9-H01	4T(BF75D/BF80A/BF90D/BF100A)	23.2	64.2	34.9	H	PCS			

Parsun Engine Impellers

Cod.	Genuine Code	Engine Type HP	d1 mm	D mm	H mm	Socket	UM	€		
1814307	F2.6-030000100	4T(2.6)	9.9	36	14.5	H	PCS			
1814250	F15-06050000	4T(4/5)	11	40	12.6	H	PCS			
1814244	F4-03060000	4T(9.9/15)	12.85	53	14	H	PCS			
1814310	F25-04040000	4T(20/25)	16.1	51	19	H	PCS			

Tomos Engine Impellers

Cod.	Genuine Code	Engine Type HP	d1 mm	D mm	H mm	Socket	UM	€		
1814405	210-245	2T(10/18)	15	65	15	C	PCS			

Johnson / Evinrude Engine Impellers

Cod.	Genuine Code	Engine Type HP	d1 mm	D mm	H mm	Socket	UM	€		
1814314	389576	2T(4/4.5/5/6/7.5/8)	11.2	38.4	17.9	H	PCS			
1814301	114812	2T(2/2.3/3/3.3)	12	42.5	14	C	PCS			
1814283	387361/763735	2T(4/6)	11.2	38.4	17.9	G	PCS			
1814275	277181>434424	2T(6)	11	69	12.8	H	PCS			
1814280	386084	2T(9.9/15)	12.75	38.4	17.8	G	PCS			
1814276	375638>775518	2T(18/20/25)	12.7	69	12.8	H	PCS			
1814282	395289	2T(20/25/30/35)	15.87	51	19	I	PCS			
1814277	377230>777213	2T(40/50/55)	16.04	69.8	22.1	H	PCS			
1814271	396809>777214	2T(40/45/50/55)	16.04	70	22.3	I	PCS			
1814297	432941	2T(25/40/50)	19.13	91.3	25.4	I	PCS			
1814315	437059	2T(40/50/60/65/70)	19.13	91.3	25.4	I	PCS			
1814296	396725/432954	2T(40/50/60/65/70/75)	19.13	91.5	25.4	I	PCS			
1814485	389642	2T(V4/V6<1978)	22.32	89	31.9	H	PCS			
1814486	435821/5001593	2T(V4/V6>1978)	22.41	89	31.9	I	PCS			
1814288	5030188	4T(4/5)	10.15	41	14	C	PCS			
1814289	5033112	4T(9.9/15)	12.3	42	20	H	PCS			
1814287	5031417	4T(25/30/40/50)	17.1	67.5	16.18	H	PCS			

Cod.	Genuine Code	Engine Type HP	d1 mm	D mm	H mm	Socket	UM	€		
1814290	5030723	4T(60/70)	22.2	78.3	26	H	PCS			
1814291	5033542	4T(90/115/140)	24.3	86	31.7	H	PCS			

Selva Engine Impellers

Cod.	Genuine Code	Engine Type HP	d1 mm	D mm	H mm	Socket	UM	€		
1814201	8095020	2T(6/8/10/15)	13	48	14.9	G	PCS			
1814202	8095050	2T(20<>35)	15	53	20	G	PCS			
1814203	8095060	2T(40<>100)	18.15	58	22.5	G	PCS			
1814250	6EO-44352-00	4T(4)	11	40	12.6	H	PCS			
1814244	63V-44352-01	4T(9.9/15)	12.85	53	14	H	PCS			
1814310	6H4-44352-02	4T(25)	16.1	51	19	H	PCS			
1814241	6H3-44352-00	4T(40/50/60)	18.05	51.8	19.05	H	PCS			
1814317	67F-44352-00	4T(100)	20	58.2	34.7	H	PCS			
1814313	6E5-44352-01	4T(115)	22.45	89	31	H	PCS			

